Bronze, One Conductor Mechanical Lugs
One Mounting Hole

RoHS Compliant

UL LISTED 8M24

SA AP-100973-1

TYPE
CL

Features
- Range taking
- Easily installed with a key wrench
- Convenient peep hole
- Re-usable
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- Rated for 90˚ C

Benefits
- Permits inventories to be kept to a minimum
- Time savings
- Easy inspection
- Provides efficient use and flexibility in the field
- Application versatility



Catalog Number	Wire Range	Dimensions						
		G	A	B	C	D	J	F
CL-1-8†	8-14	1/4	1-1/8	9/16	1/2	1/8	17/32	9/32
CL-1-4†	4-8	1/4	1-1/8	5/8	1/2	1/8	17/32	9/32
CL-1-1	1-4	1/4	1-5/8	13/16	5/8	7/32	1	11/32
CL-1-2/0	2/0-1	3/8	1-15/16	1	13/16	1/4	1-3/16	7/16
CL-1-4/0	4/0-2/0	3/8	2-3/8	1-1/4	1	9/32	1-13/32	17/32
CL-1-300	300kcmil-4/0	1/2	2-3/4	1-1/2	1-3/16	5/16	1-17/32	5/8
CL-1-500	500kcmil-300kcmil	1/2	3-1/16	1-11/16	1-3/8	11/32	1-13/16	3/4
CL-1-750	750kcmil-500kcmil	1/2	3-25/32	2-3/16	1-5/8	13/32	2-1/8	1
CL-1-1000	1000kcmil-750kcmil	5/8	4-5/16	2-15/32	1-7/8	15/32	2-11/32	1-3/16

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
† With Filister head screw. All other, hex socket screw.
UL File E158587

4730 Madison Road, Cincinnati OH 45227-1426 | PH: 513.533.6200 | FAX: 513.871.4084 | www.ilsco.com
In Canada: 1050 Lakeshore Road East, Mississauga, Ontario, Canada L5E 1E4 | PH: 905.274.2341 | FAX: 905.274.8763

Bronze, One Conductor Mechanical Lugs
Two Mounting Hole

RoHS Compliant

UL LISTED 8M24

SA AP-100973-1

TYPE
CL

Features
- Range taking
- Easily installed with a key wrench
- Convenient peep hole
- Re-usable
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- Rated for 90˚ C

Benefits
- Permits inventories to be kept to a minimum
- Time savings
- Easy inspection
- Provides efficient use and flexibility in the field
- Application versatility



C

Catalog Number	Wire Range	Dimensions							
		G	A	B	C	D	J	F	H
CL-1-2/0N	2/0-1	1/2	3-15/16	3	1	1/4	11/16	9/16	1-3/4
CL-1-4/0N	4/0-2/0	1/2	4-1/8	3	1	9/32	1-9/32	9/16	1-3/4
CL-1-300N	300kcmil-4/0	1/2	4-3/16	3	1-3/16	5/16	1-15/32	9/16	1-3/4
CL-1-500N	500kcmil-300kcmil	1/2	4-7/8	3-1/2	1-3/8	11/32	1-13/16	9/16	1-3/4
CL-1-750N	750kcmil-500kcmil	1/2	5-3/32	3-1/2	1-3/4	13/32	2-1/8	9/16	1-3/4
CL-1-1000N	1000kcmil-750kcmil	1/2	5-1/4	3-1/2	3	15/32	2-1/8	9/16	1-3/4

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
Furnished with bolt holes and spacing to fit equipment supplied with NEMA type connector mounting pads.
UL File E158587

Bronze, Two and Three Conductor Mechanical Lugs

RoHS Compliant

UL LISTED 8M24

SA AP-1009T3-1

TYPE
CL

Features
- Range taking
- Easily installed with a key wrench
- Convenient peep hole
- Re-usable
- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- Rated for 90˚ C

Benefits
- Permits inventories to be kept to a minimum
- Time savings
- Easy inspection
- Provides efficient use and flexibility in the field
- Application versatility



Fig. 1



Fig. 2

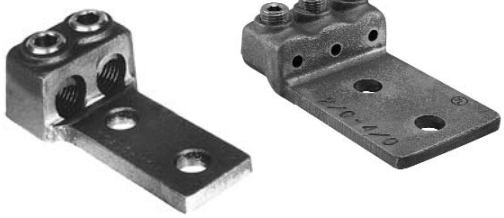



Fig. 3



Fig. 4

Catalog Number	Figure Number	Wire Range	Dimensions								
			G	A	B	C	D	E	F	H	J
CL-2-8†	1	8-14	1/4	2-3/16	1-3/4	5/8	1/8	11/16	9/32	5/8	15/32
CL-2-4†	1	4-8	1/4	2-1/2	2	1	1/8	1	9/32	5/8	17/32
CL-2-1	1	1-4	3/8	2-13/16	2	1-1/4	7/32	1-1/4	7/16	1	19/32
CL-2-2/0	1	2/0-1	1/2	4-7/16	3-1/2	1-1/2	1/4	1-9/16	5/8	1-3/4	13/32
CL-2-4/0	1	4/0-2/0	1/2	4-5/8	3-1/2	1-3/4	9/32	1-3/4	5/8	1-3/4	15/16
CL-2-300	1	300kcmil-4/0	1/2	4-3/4	3-1/2	2	5/16	2-1/8	5/8	13-3/4	1-9/16
CL-2-500	1	500kcmil-300kcmil	1/2	5-3/8	3-15/16	2-1/2	11/32	2-1/2	5/8	1-3/4	1-13/16
CL-2-700	2	700kcmil-500kcmil	1/2	5-19/32	4	4	13/32	2-15/16	5/8	1-3/4	2-1/8
CL-2-1000	2	1000kcmil-750kcmil	1/2	5-27/32	4	4	15/32	3-1/4	5/8	1-3/4	2-11/32
CL-3-4/0	3	4/0-2/0	1/2	4-5/8	3-3/8	2-1/2	9/32	2-3/4	5/8	1-3/4	15/16
CL-3-300	3	300kcmil-4/0	1/2	4-3/4	3-1/2	3	5/16	3-1/4	5/8	1-3/4	1-17/32
CL-3-500	4	500kcmil-300kcmil	1/2	5-3/8	4	4	11/32	3-3/4	5/8	1-3/4	1-13/16
CL-3-750	4	750kcmil-500kcmil	1/2	5-19/32	4	4	13/32	4-3/8	5/8	1-3/4	2-1/8
CL-3-1000	4	1000kcmil-750kcmil	1/2	5-27/32	4	4	15/32	4-13/16	5/8	1-3/4	2-11/32

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)
† With Filister Head Screw
UL File E158587