




Shallow IC Housing

H221 IC Housing with hanger bars, junction box and magnetic ballast

24P Flush Diffuser Trim
Integral 120V fluorescent ballast for one 13W Twin Tube 2-pin Compact Fluorescent lamp (F13TT, GX23 base). Junction box listed for through branch circuit wiring and has two 3/4" and five 1/2" knockouts. Bar hangers will span 24"

joists. 3 1/2" height allows use in 2 x 4 construction. May be installed in IC applications. May be installed in ceiling or wall. UL/cUL Damp location listed, Feed through Listed, Replacement Lamp: Available by others or as Halo #Z63

Housing: 8 3/8" L x 4 5/8" D x 3 1/2" H **Trim:** 5 1/2" x 9 1/4" (140mm x 235mm)

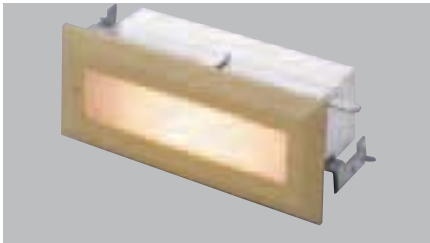

Brick Light/Aisle Light

With thermal protector, brown die cast trim, flat unbreakable lens and tamperproof screws. Non-IC

H2925T Incandescent 20W T6 1/2 lamps (Halo Z7). Damp location listed.

H2925TW Incandescent 20W T6 1/2 lamps (Halo Z7). Wet location listed.

H2925PL 7W 2-pin, G23 base compact fluorescent

lamps. UL/cUL Wet location listed.

Accessory: SD2925 Tamper proof screwdriver

Housing: 7 3/8" L x 3 1/2" D x 2 1/4" H

Trim: 8 7/8" L x 3 1/2" H



Brick Light/Aisle Light

With thermal protector, brown die cast trim, glare reducing shade and tamperproof screws. Non-IC

H2926T Incandescent 20W T6 1/2 lamps (Halo Z7). Damp location listed. IP rated.

H2926TW Incandescent 20W T6 1/2 lamps (Halo Z7). Wet location listed.

Accessory: SD2925 Tamper proof screwdriver

Housing: 7 3/8" L x 3 1/2" D x 2 1/4" H

Trim: 8 7/8" L x 3 1/2" H



H2920ICT


Step Light 25W A19 lamp. Louvered trim. Wiring connections are made in fixture.

Finish: White (P)

Housing: 8" L x 3 1/2" D x 4 1/2" H

Trim: 9 3/8" L x 5 3/4" H

IP Rated

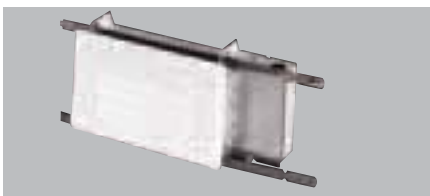

2922ICT

Step Light 25W A19 lamp. Fixture is prewired to junction box. U.L. listed for feed through applications. Louvered trim.

Housing: 11 5/8" L x 3 1/2" D x 5 1/2" H

Finish: White (P)

Trim: 9 3/8" L x 5 3/4" H

IC rated for direct contact with insulation and combustible materials. IP Rated



H2900T Thru-Wall Light


Provides lighting on each side of wall, 100W A19. Albalite Lens.

Housing: 13 1/2" L x 4" D x 8 1/4" H

Finish: White (P)

Trim: 11 3/8" L x 7 3/4" H

Non-IC IP Rated.

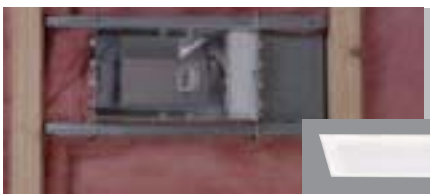

H2832ICTW Lensed Wall/Step Light/Shallow

For wall mounting in insulation. IC rated for direct contact with insulation and combustible material, UL/cUL listed for damp location; UL/cUL listed for feed through; UL/cUL listed for direct contact with insulation.

Housing: 11-1/2" L (enclosure and J-box) x 5-1/2" W x 3-1/2" D

Trim: 5-3/4" H x 9-3/8" L

Finish: White (P)