

Carlon®



T&B Catalog Number: CP300N
UPC Number: 34481106104
Description: Non-metallic 30.5mm (3) hole pushbutton enclosure.

Status: Active

Features

- Integrally molded mounting flange.
- Brass screw inserts
- 304 stainless steel screws.
- High-impact strength
- Grounding plate is included on the cover.

Application

- Standard oil-tight pushbuttons, switches and pilot lights.
- Conduit entries
- Junction boxes
- MRO and OEM applications
- Wall mount enclosures are resistant to most corrosive agents.
- Universal pushbutton holes are designed to accommodate all standard oil-tight pushbuttons, switches and pilot lights.

General

-Material Thermoplastic

Dimension Information

-Width (inches)	3.5
-Height (inches)	9.38
-Depth (inches)	3.38
-A (inches)	7.38
-B (inches)	2.81
-C (inches)	3
-F (inches)	7.88
-G (inches)	3.25
-J (inches)	2.38
-L (inches)	8.5
-R (inches)	0.63
-S (inches)	2.5

Packaging

-Package in Units	6
-T&B Sold in UOM	Each
-T&B Weight Per UOM	1.3 lbs. Each



Application Support

-T&B Sales Drawings	wsd-ac01672
---------------------	-------------

Notes

-*Note All Circuit Safe® pushbutton enclosures are furnished with standard hole dimensions; 1/32" diameter with keyways at 12 o'clock and 3 o'clock.

Certifications

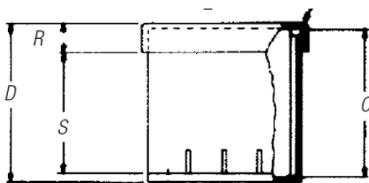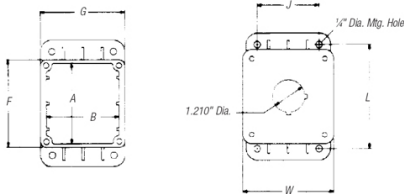

-RoHS Compliance Yes

Certifications



File Nbr:
E108856

For further technical assistance, please contact us...

Thomas & Betts - USA
8155 T&B Blvd.
Memphis, TN 38125
www.tnb.com

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125

Hours: 7AM - 6PM CDT
Monday-Friday
Phone: (888) 862-3289
Fax: (901) 252-1321
Email:techsupport@tnb.com