


Non-CTL Plug-On Replacement—Circuit Breakers, Type BRD—10 kAIC, 120/240 Vac

BR2020

Class Non-CTL, 1-Inch (25.4 mm) per Pole 10 kAIC—Breakers Do Not Have Rejection Tab Feature




Type BR Duplex




Single-Pole Requires One 1-Inch (25.4 mm) Space
10 per Shelf Carton

Type Brand BRD Quadplex Independent Trip



Two-Pole Requires Two 1-Inch (25.4 mm) Spaces
5 per Shelf Carton


Type BRD Quadplex Common Trip Center and Outer Poles



Two-Pole Requires Two 1-Inch (25.4 mm) Spaces
5 per Shelf Carton

Ampere Rating	120 Vac		120/240 Vac		120/240 Vac		120/240 Vac		Catalog Number
	Catalog Number	Wire Size Range Cu/Al 65°C or 75°C	Outer Two-Pole Independent Trip	Center Two-Pole Independent Trip	Outer Two-Pole Common Trip	Center Two-Pole Common Trip			
15–15	BR1515	#14–4	15	15	BR415	15	15	BRDC215215	
15–20	BR1520	#14–4	20	20	BR420	30	30	BRDC230230	
20–15	BR2015	#14–4	30	30	BR430	30	40	BRDC230240	
20–20	BR2020	#14–4	20	30	BRD220230	30	50	BRDC230250	
30–30	BR3030	#14–4	30	40	BRD230240	—	—	—	
30–50	BR3050	#14–4	30	50	BRD230250	—	—	—	

CTL and Non-CTL Breakers

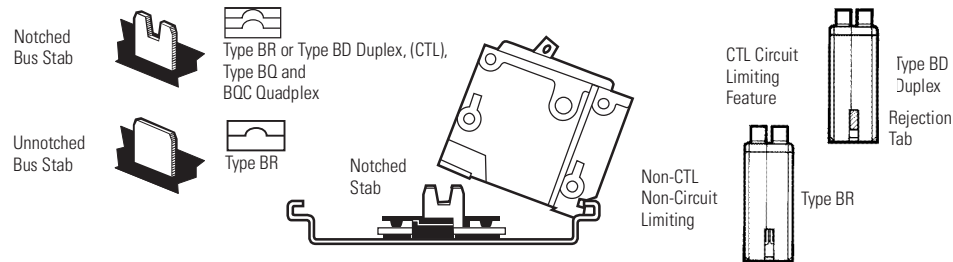

Note

Type BD Duplex, BQ and BQC Quadplex circuit breakers can be installed in Circuit Limiting (CTL) listed BR loadcenters. Type BR twin breakers can be installed in Non-CTL BR loadcenters.