


Straight Blade Power Devices - 20, 30, 50 & 60A

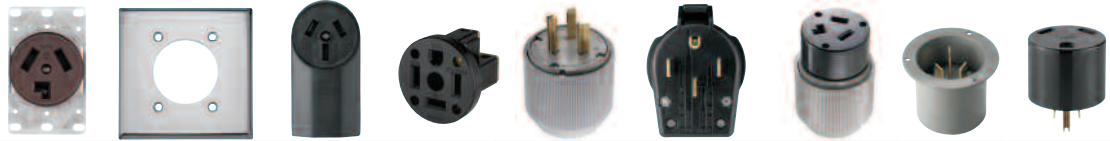


Rating: Amps V/AC	Receptacle/ Plug NEMA Configuration	Flush Receptacle	Wallplate	Surface Receptacle	Panel Mount Receptacle	Plugs	Angle Plugs	Connectors	Flanged Inlets	Adapters
2-Pole, 3-Wire Grounding										
30A 125V	 5-30R	 5-30P	Commercial: 1233 (Brown) Industrial: 5716N (Black)	Standard Size: 39CH, 68, 2068, 2168, 93221, 93227		Industrial: 5717N (Gray)	Commercial: S41 (Black) Industrial: 5717AN (Gray)	Industrial: 6716N (Gray & Black)	Industrial: 5717NFI (Gray)	
30A 125V	 TT-30R	 TT-30P	Commercial: 1263 (Black)		Commercial: U1263 (Black)		Commercial: 83 (Black)			Commercial: 1264 TT-30 (Plug to NEMA 5-15R or 5-20R) (Black)
30A 250V	 6-30R	 6-30P	Commercial: 1234 (Brown) Industrial: 5700N (Black)		Commercial: 1232 (Black)	Industrial: 5701N (Gray)	Commercial: S42 (Black) Industrial: 5701AN (Gray)	Industrial: 6700N (Gray & Black)	Industrial: 5701NFI (Gray)	
30A 277V	 7-30R	 7-30P	Industrial: 5795N (Black)		Mid-Size: 5068, PJ703, PJ724		Industrial: 5703N (Gray)	Industrial: 5703AN (Gray)	Industrial: 6795N (Gray & Black)	Industrial: 5703NFI (Gray)
50A 125V	 5-50R	 5-50P	Commercial: 1253 (Brown)			Industrial: 5712N (Gray)	Commercial: S41 (Black) Industrial: 5712AN (Gray)	Industrial: 6711N (Gray & Black)	Industrial: 5712NFI (Gray)	
50A 250V	 6-50R	 6-50P	Commercial: 1254 (Brown) Industrial: 5709N (Black)		Commercial: 1252 (Black)	Industrial: 5710N (Gray)	Commercial: S42 (Black) Industrial: 5710AN (Gray)	Industrial: 6709N (Gray & Black)	Industrial: 5710NFI (Gray)	
50A 277V	 7-50R	 7-50P				Industrial: 5705N (Gray)	Industrial: 5705AN (Gray)	Industrial: 6796N (Gray & Black)	Industrial: 5705NFI (Gray)	
3-Pole, 3-Wire Non-Grounding										
20A 125/250V	 10-20R	 10-20P	Commercial: 805 (Ivory)			Industrial: 9151N (Gray) Commercial: 2836 (Armd PVC) (Yellow)				
30A 125/250V Dryer	 10-30R	 10-30P	Commercial: 38B (Brown)	Standard Size: 39CH, 68, 2068, 2168, 93221, 93227	Commercial: 125 (Black)	Industrial: 9337N (Gray)	Commercial: S80 (Black) Industrial: 9352AN (Gray)	Industrial: 9341N (Gray & Black)	Industrial: 9337NFI (Gray)	
50A 125/250V Range	 10-50R	 10-50P	Commercial: 32B (Brown) Industrial: 7985N (Black) Commercial: 122B (Brown)	Mid-Size: 5068, PJ703, PJ724 Standard Size: 192	Commercial: 112 (Black)	Industrial: 4524N (Gray)	Commercial: S80 (Black) Industrial: 7952AN (Gray)	Industrial: 4526N (Gray & Black)	Industrial: 4524NFI (Gray)	

Power Device Dimensional Information: B-24; Specification Information: B-31-B-33


Straight Blade Power Devices

Flush Receptacles




Cat. Nos.	A	B	C	D (depth)	E	F (face dia.)
30 & 1200 Series	3.28" (83.3mm)	2.38" (60.5mm)	1.81" (46.0mm)	1.42" (36.1mm)	2.50" (63.5mm)	2.10" (53.5mm)
5000 & 7000 Series	3.28" (83.3mm)	2.38" (60.5mm)	1.81" (46.0mm)	1.69" (42.9mm)	2.50" (63.5mm)	2.12" (53.8mm)
8000 Series	3.28" (83.3mm)	2.38" (60.5mm)	1.81" (46.0mm)	1.69" (42.9mm)	-	2.38" (60.5mm)

Surface Receptacles




Cat. Nos.	A	B	C
100 & 1200 Series	2.10" (53.3mm)	4.75" (120.7mm)	2.50" (63.5mm)

Panel Mount Receptacles




Cat. Nos.	A	B
58, 60	2.80" (71.1mm)	2.80" (71.1mm)
U1263	1.69" (42.9mm)	2.09" (53.1mm)

Angled Plugs




Cat. Nos.	A	B	C	Cord Dia.
80 & 83	2.92" (74.2mm)	1.03" (26.2mm)	2.80" (71.1mm)	83: 0.64" (16.3mm) max. 80: 0.80" (20.3mm) max.
S41 & S42 S20 & S21 S19	3.37" (85.6mm)	1.38" (35.1mm)	2.87" (72.9mm)	S41 & S42: 1.10" (27.9mm) S20 & S21: 1.13" (28.7mm) S19: 1.00" (25.4mm)
4500AN, 5700AN, 7900AN, 8300AN, 8400AN, 9300AN, 9400AN, AH8400AN Series	4.30" (109.2mm)	1.88" (47.8mm)	3.00" (76.2mm)	0.56-1.31" (14.2-33.3mm)

Plugs




Cat. Nos.	A	B	Cord Dia.
4500N, 5500N, 5700N, 8300N, 8400N, 9300N, 9400N, AH8400N Series	3.34 - 3.81" (84.8 - 96.8mm) varies with dia. of cord	3.12" (79.2mm)	0.43 - 1.31" (10.8 - 33.3mm)

Connectors




Cat. Nos.	A	B	C	Cord Dia.
6700N, 9300N, 9500N Series	4.71- 5.19" (119.6 - 131.8mm) varies with dia. of cord	3.12" (79.2mm)	2.59" (65.8mm)	0.43- 1.31" (10.8 - 33.3mm)

Flanged Inlets




Cat. Nos.	A	B	C
4500NFI, 5700NFI, 9300NFI Series	2.72" (69.1mm)	3.75" (95.3mm)	2.81" (71.4mm)

Miscellaneous Power Devices



805V



2836