

# PR75ASIC

6" Recessed AirSeal™ IC Rated Downlight

Catalog Number: \_\_\_\_\_

Type: \_\_\_\_\_


Project: \_\_\_\_\_

## Description

For new construction. Thermally protected, IC rated recessed housing. cUL listed for direct contact with thermal insulation. Breakaway plaster frame permits use as a remodel fixture. Furnished with pre-installed adjustable bar hangers. Listed for Through-Branch Circuit Wiring and Damp Locations.

## Features

- Housing adjusts vertically in plaster frame to allow for variations in ceiling thickness.
- Detachable compact plaster frame allows fixture to be passed through 6 3/8" ceiling opening for remodel applications.
- Junction box has four Romex® pry-outs, eliminating the need for adapters.
- 90 watt maximum.
- AirSeal™ rated.
- Removable adjustable socket holder plate allows precise adjustments to any position without tools.
- Thermal protection standard.
- cUL listed for direct contact with thermal insulation. Listed for Through-Branch Circuit Wiring and Damp Locations.

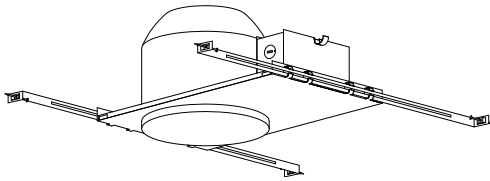

## CATALOG SYSTEM AND OPTIONS

SAMPLE CATALOG NUMBER: PR75ASIC-RB30

### Housing

PR75ASIC

### Trims (choose only one)

<b>RB30</b>	Full Baffle Black
<b>RB30BRN</b>	Full Brushed Nickel Baffle
<b>RB40W</b>	Full White Baffle
<b>RB40</b>	Full Black Baffle
<b>RC30G</b>	Gold Cone
<b>RC30C</b>	Clear Cone
<b>RC30BK</b>	Black Cone
<b>RC30W</b>	White Cone
<b>RA100W</b>	White Multiplier
<b>RA100G</b>	Gold Multiplier
<b>RA100C</b>	Clear Multiplier
<b>RBC30</b>	Black w/Leaf Springs
<b>RBC30W</b>	Full White w/Leaf Springs
<b>RAC30W</b>	Full White Cone w/Leaf Springs
<b>RAC30</b>	Black Cone w/Leaf Springs
<b>RF30SB</b>	Satin Brass Open
<b>RF30C</b>	Chrome
<b>RF30W</b>	White

<b>RS30W</b>	White Splay
<b>RS30BRN</b>	Brushed Nickel Splay
<b>RM38W</b>	White Stepped Baffle
<b>RM38</b>	Black Stepped Baffle
<b>RM48</b>	Black Stepped Baffle
<b>RM48W</b>	White Stepped Baffle/Regressed Eyeball
<b>SHR12IC</b>	White Opal Shower
<b>SHR16IC</b>	Drop Glass Shower Light
<b>RMS30GLD</b>	Gold Reflector
<b>RMS30CLR</b>	Clear Reflector
<b>RMS30BLK</b>	Black Reflector
<b>RMS30W</b>	White Reflector
<b>RM30</b>	Black Baffle
<b>RM30W</b>	White Baffle
<b>SH12ICP</b>	Albalite Shower Trim
<b>SH16ICP</b>	Drop Opal Shower Trim
<b>R18P</b>	White Eyeball
<b>R18PB</b>	Polished Brass Eyeball
<b>R18BRN</b>	Brushed Nickel Eyeball
<b>R30B</b>	Anodized Satin Brass

<b>R30C</b>	Open Trim
<b>R30P</b>	Anodized Satin Chrome
<b>R30PB</b>	White
<b>R30BRN</b>	Polished Brass
<b>R19P</b>	Brushed Nickel
<b>SH36P</b>	Black Stepped Baffle, White Recessed Glass Drop Shower Light
<b>RCS30</b>	Shallow Cone Clear
<b>RCS30W</b>	Shallow Cone White
<b>R38P</b>	Baffled Eyeball
<b>RM40</b>	Black Stepped Baffle
<b>RM40W</b>	White Stepped Baffle
<b>RBS30</b>	Shallow Baffle Black
<b>RBS30W</b>	Shallow Baffle White
<b>R6SHR</b>	Open Shower Light
<b>RBD40</b>	Deep Stepped Baffle Black
<b>RBD40W</b>	Deep Stepped Baffle White
<b>HS30CLR</b>	Economy Clear Reflector
<b>HS30GLD</b>	Economy Gold Reflector
<b>HS30BLK</b>	Economy Black Reflector



### General Notes:

See Trims on reverse side of the sheet for lamp compatibility. Custom colors are available on select trims. Please see the Decorative Trims link at [www.caprilighting.com](http://www.caprilighting.com) to download brochure and for further details.

## SPECIFICATIONS

1. **Housing** - Die-formed all-aluminum construction. For use in direct contact with thermal insulation. Adjusts vertically in plaster frame to accommodate ceilings 1/2" to 1-1/2" thick. Housing can be pulled through plaster frame for access to junction box. Accommodates lamps up to 90 watts, depending on trim used. Ceiling opening 6-3/8". Top of housing constructed of galvanized steel.

2. **Plaster Frame** - Die-formed galvanized steel, detachable from housing for use as remodel housing, installed through 6-3/4" hole from below ceiling.

3. **Socket** - Medium base screw shell porcelain socket, mounted with snap-in clips to adjustable socket holder. Adjustable socket plate, retained by single wing-nut, adjusts vertically to accommodate a variety of lamp and trim options. Socket plate is easily removed for use with socket supporting trims.

4. **Bar Hangers** - Pre-installed pre-nailed BH6 style bar hangers telescope from 16" to 24". Vertical design of interlocking bar hangers prevents sagging even at full 24" extension. BH6 style barhangers may be used on either long or short axis of housing.

5. **Thermal Protection** - Standard thermal protection device inside housing automatically takes the fixture out of service if temperature becomes excessive from overlamp-ing or wrong lamp /trim combination.

6. **cUL listed** - for damp locations and through branch 4 in/4 out wiring.



7. **Junction Box** - Extra-large 25 cubic inch 16 gauge galvanized steel with two snap-on covers and grounding pigtail. Knockouts for 1/2" and 3/4" conduit, and four Romex® pry-outs with strain relief. Meets all safety requirements of UL and N.E.C.

### Accessories (Order separately)

T-Bar Clips - set of four

TC-5

## DIMENSIONS

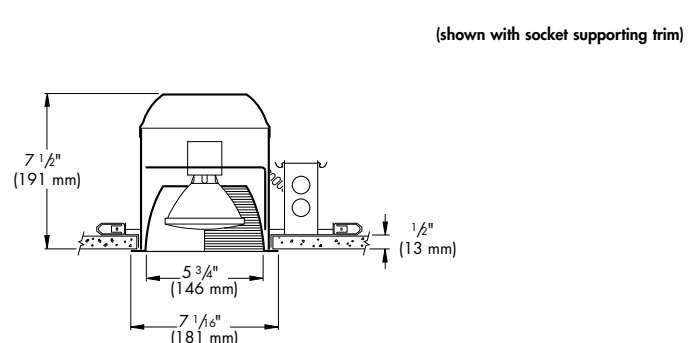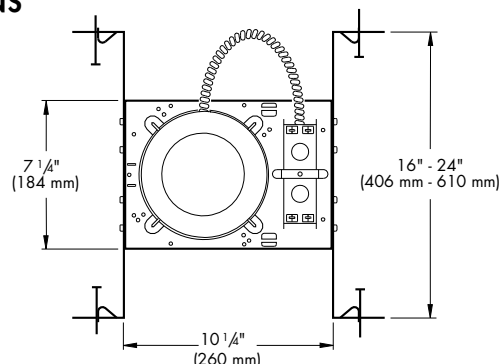

REV. 1/08

PR75ASIC TRIMS



**RB30** (Shown)  
Full Black Baffle

**RB30W**  
Full White Baffle  
**RB30BRN**  
Full Brushed Nickel Baffle  
Socket Supporting  
7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	
	PAR30	50W
	PAR38	90W



**RB40W** (Shown)  
Full White Baffle

**RB40**  
Full Black Baffle  
Socket Supporting  
7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	
	BR40	90W
	PAR30	50W
	PAR38	90W



**RC30G** (Shown)  
Gold Cone

**RC30C** Clear Cone  
**RC30BK** Black Cone  
**RC30W** White Cone  
Socket Supporting  
7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	
	PAR30	50W
	PAR38	90W



**RA100W** (Shown)  
White Multiplier

**RA100G** Gold Multiplier  
**RA100C** Clear Multiplier  
Socket Supporting  
7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	
	A19	
	R/BR40	90W
	PAR30	50W
	PAR38	90W




**RF30SB** (Shown)  
Satin Brass Open Trim  
with Socket Bracket

**RF30C** Chrome  
**RF30W** White

Socket Supporting  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	65W
	PAR30	50W

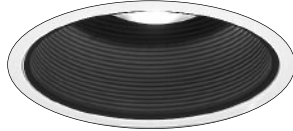

**RM30** (Shown)  
Black Stepped Baffle  
**RM30W**  
White Stepped Baffle

Bracket Required  
7-3/8" O.D. (187 mm)  
50W PAR30, 75W R30

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30	50W




**RS30W**  
White Splay

**RS30BRN**  
Brushed Nickel Splay

Socket Supporting  
7-1/16" O.D. (179 mm)  
75W R30, 75W PAR30

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	
	PAR30	

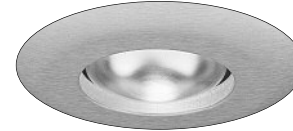

**R30B** (Shown)  
Anodized Satin Brass Open Trim  
**R30C** Anodized Satin Chrome  
**R30P** White  
**R30PB** Polished Brass  
**R30BRN** Brushed Nickel

Bracket Required  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	65W



**SH36**  
Drop Round Shower Light  
Wet Location Approved

Socket Supporting  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	A19	40W



**RMS30CLR** (Shown)  
Clear Reflector

**RMS30GLD**  
Gold Reflector  
**RMS30BLK**  
Black Reflector  
**RMS30WHT**  
White Reflector

Bracket Required  
7-3/8" O.D. (187 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30	50W



**SH12IC**  
Albalite Shower Light  
Wet location approved

Socket Supporting  
8" O.D. (203 mm)  
25W A19

Housing	Lamp	IC Only
PR75ASIC	A19	25W



**SH16ICP**  
Drop Opal Shower Light  
Wet location approved

Socket Supporting  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	A19	40W



**RBC30** (Shown)  
Black Baffle w/Leaf Spring

**RBC30W**  
Full White Baffle w/ Leaf Spring

Socket Supporting  
7-1/16" O.D. (179 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	
	PAR30	50W
	PAR38	90W



**R18P**  
White Eyeball (shown)

**R18PB**  
Polished Brass

Socket Supporting  
30° Tilt  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	R/BR30	75W
	PAR30LN	



**SHR12IC**  
Regressed Glass Shower Light  
Wet Location Approved

Socket Supporting  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	A19	25W



**SHR16IC**  
Regressed Glass Drop Opal  
Shower Light  
Wet Location Approved

Socket Supporting  
8" O.D. (203 mm)

Housing	Lamp	IC Only
PR75ASIC	A19	25W

The most popular trims for this housing are shown above, however all the trims available are listed for selection in the catalog system. If the trim selected in the catalog system is not shown above please consult the Capri Trim Gallery at [www.caprilighting.com](http://www.caprilighting.com). Custom colors are available on select trims. Please see the Decorative Trims link at [www.caprilighting.com](http://www.caprilighting.com) to download brochure and for further details.

Capri Lighting reserves the right to make changes without notice. ©2008