

High Voltage Push Buttons


850 & 854



Cat No. 850 & 854 push buttons are rugged, fast make and break contact push buttons that operate regardless of how pressure is applied or released. The buttons have insulated, protective sleeves and phosphor bronze, self cleaning contacts that withstand shock and vibration.

Both push buttons panel mount in a 7/8" (22mm) hole using the supplied locknut. Also mounts in a 7/8" (20mm) hole that has been tapped with straight pipe threads. Required hole depth is 1 3/4" (44mm).

Use for high voltage AC or DC circuits. May be used with 149-1 mounting plate. See page 10-11.

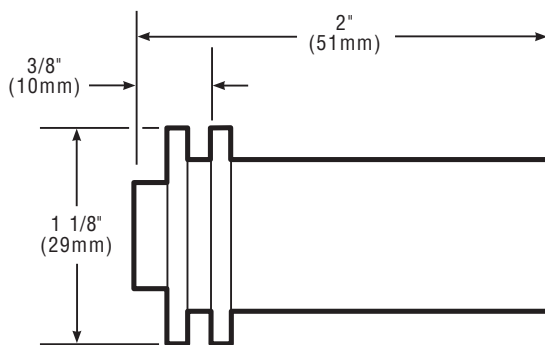

FEATURES

- > Locknut mounting
- > Convenient screw terminals
- > Cat. No. 850 - has normally open contacts
- > Cat. No. 854 - normally closed contacts
- > Chrome plated, heavy duty shell with black center

AGENCY APPROVALS

- > Cat. No. 850 UL Recognized

SPECIFICATIONS

- > Cat. no. 850 contact rating:
 - 12V: 15 amps AC
 - 24V: 15 amps AC
 - 48V: 10 amps AC
 - 125V: 5 amps AC
 - 250V: 5 amps AC
- > Cat. no. 854 contact rating:
 - 12V: 4 amps AC, 4 amps DC
 - 24V: 4 amps AC, 4 amps DC
 - 48V: 4 amps AC, 2 amps DC
 - 125V: 2 amps AC, 1 amp DC
 - 250V: 1 amp AC, 0.5 amps DC