




Revisions

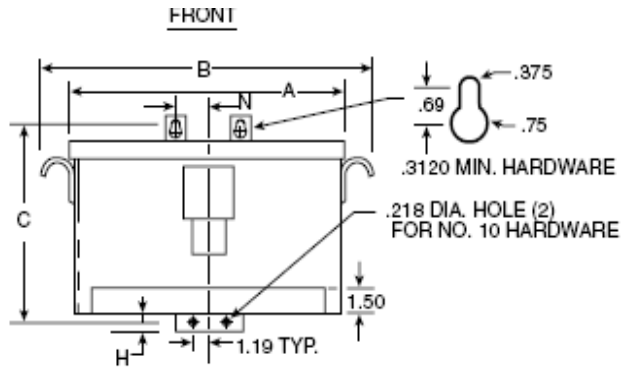


PRIMARY: 600 Volts
SECONDARY: 480 Volts
TAPS: 2, 5% BNFC

BOTTOM

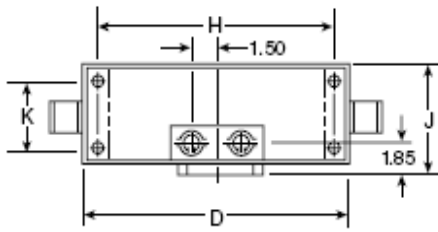

CERTIFIED DIMENSIONS
 THREE PHASE 7.5 KVA
 TOTALLY ENCLOSED
 DRIVE ISOLATION TRANSFORMERS

| Primary Volts | Alt Rating | Connect Primary Lines To | Inter-Connect | Connect Secondary Lines To |
|-----------------|------------|--------------------------|---------------|----------------------------------|
| 600 | 480 | H1, H2, H3 | | |
| 570 | 456 | H4, H5, H6 | | |
| 540 | 432 | H7, H8, H9 | | |
| Secondary Volts | | | | |
| 480 | 380 | | | X1, X2, X3 |
| 277 | 220 | | | X1 to X0 X2 to X0 X3 to X0 |
| 1 phase | 1 phase | | | |

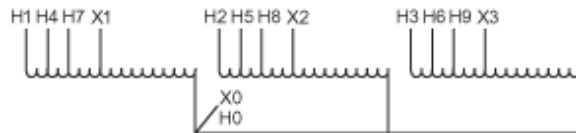

| KVA | CATALOG NUMBER | VOLTAGE | | TYPE | WEIGHT | PHASE | FREQ. |
|-------|--------------------|---------|---------|------|---------|-------|-------|
| | | HIGH | LOW | | | | |
| 45/36 | T-2-52707-1 | 600/480 | 480/380 | AUTO | 156 Lbs | 3φ | 60 Hz |

TYPICAL PERFORMANCE DATA

| | |
|--------------|-------|
| Winding Rise | 115°C |
| Insulation | 180°C |
| Sound Level | 45 dB |

| | |
|----------------------|--|
| Regulation @ 100% PF | |
|----------------------|--|

| | |
|-----------|--|
| IMPEDANCE | |
|-----------|--|

| | |
|--------------------|--|
| Typical Efficiency | |
| Full Load Losses | |
| No Load Losses | |

| A | B | C | D | E | F | G | H | J | K | L | M | N | P | R |
|-------|-------|-------|-------|------|-------|-------|-----|------|---|------|---|------|---|---|
| 16.87 | 19.25 | 14.46 | 16.72 | 7.37 | 13.06 | 15.21 | .38 | 7.31 | | 6.87 | | 3.25 | | |



Type No.

DATE:

6-13-08

A

PRINTS TO

CONTROL
7