

PRODUCT DESCRIPTION

The Essentia® by Cree LED flat panel troffer transforms any space into a modern, visually comfortable environment with superior 90 CRI light quality. The remarkably thin 2.8" (70mm) depth of the flat panel easily accommodates narrow plenums or can be suspended for a more stylish look. The 1' x 4' flat panel delivers up to 4,000 lumens of highly efficacious 100 lumens per watt light with great color quality. The enhanced optics enable the flat panel troffer to meet spaces with low glare requirements and improve the customer experience by reducing lighting fatigue.

Applications: Office, retail, education, petroleum

PRODUCT SPECIFICATIONS

OVERVIEW

- **Efficacy:** Up to 100 LPW
- **Initial Delivered Lumens:** 4,000 lumens
- **Input Power:** 40 Watts
- **CCT:** 3500K, 4000K, 5000K
- **CRI:** Minimum 90
- **Input Voltage:** 120-277 VAC
- **L₇₀ Lifetime:** 79,500 hours at 25°C
- **Controls:** 0-10V dimming to 10%
- **Limited Warranty†:** 5 years on luminire
- **Limited Warranty Emergency Back Up (EB) Battery:** 1 Year Battery Back Up. Test regularly in accordance with local codes
- **Mounting:** Recessed* or Suspended w/surface mount kit accessory

ACCESSORIES

SUSPENSION KIT

FPAC-45-1

- Suspension Kit with canopy kit and cables

SURFACE MOUNT KIT

SMK-CR14

DRYWALL GRID ADAPTOR

DGA14-WHT

- Above ceiling access required

CHICAGO PLENUM FIELD KIT

CPLFP

- Fits all FP types to be installed in the field

ORDERING INFORMATION

Example: FP14-40L-35K-10V

FP14	40L		10V		
PRODUCT	INITIAL DELIVERED LUMENS	CCT	CONTROL	VOLTAGE	OPTIONS
FP14 Essentia® by Cree 1' x 4' Flat Panel	40L 40W, 4,000 lumens - 100 LPW	35K 3500K 40K 4000K 50K 5000K	10V 0-10V	Blank 120-277 Volt	EB14 Emergency Backup 1,400 lumens

† See <http://lighting.cree.com/warranty> for warranty terms

* Not intended for use with 9/16" T-Bar grids unless used with a 9/16" accessory clip like "Armstrong® LFC- Fixture Clip" which can be purchased through distribution. Consult factory for non-standard grid applications.

NOTE: Price adder may apply depending on configuration



FLAT PANEL

1' X 4'

PRODUCT SPECIFICATIONS

CONSTRUCTION & MATERIALS

- Solid aluminum frame provides strength and uniformity
- Ultra-thin 2.8" (70mm) luminaire height and design effectively target a broad range of plenum spaces and allow for easy installations
- Luminaire is post-painted with a soft matte white paint
- Compatible with standard 15/16" and 9/16" T-Bar ceilings¹
- Compatible with drywall ceilings via accessory kit²
- Surface or cable mounting via accessory kits
- Frosted polycarbonate lens for non-pixelated appearance

OPTICAL SYSTEM

- Edge-lit flat panel optics produce soft balanced low glare illumination
- Components work together to optimize distribution, balancing the delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces

¹ Installation in 9/16" T-bar ceilings requires that fixture be aligned to grid aperture by securing four integral hanging clips to T-bar

² Above ceiling access required

ELECTRICAL DATA*

Initial Delivered Lumens	System Watts 120-277V	Total Current (A)			
		120V	208V	240V	277V
40L	40	0.41	0.23	0.21	0.18

* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V +/-10%

RECOMMENDED ESSENTIA BY CREE FLAT PANEL LUMEN MAINTENANCE FACTORS (LMF)¹

Ambient	Initial LMF	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Calculated ³ LMF	100K hr Calculated ³ LMF
25°C	1.00	0.91	0.81	0.72	0.64

¹ Lumen maintenance values at 25°C are calculated per TM-21 based on LM-80 data and in-situ luminaire testing

² In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

³ In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times (6X) the IESNA LM-80-08 total test duration (in hours) for the device under testing (DUT) i.e. the packaged LED chip

ELECTRICAL SYSTEM

- Integral, high-efficiency driver
- **Power Factor:** > 0.9
- **Input Power:** Stays constant over life
- **Input Voltage:** 120-277V, 50/60Hz
- **Operating Temperature Range:** 0°C - + 35°C (32°F - + 95°F)
- **Total Harmonic Distortion:** < 20%

CONTROLS

- Continuous dimming to 10% with 0-10V DC control protocol
- **10V Source Current:** 0.10mA
- For use with Class 2 dimming systems only. Reference www.creelink.com/exLink.asp?70982140Z58R34I26620963 for recommended dimming controls and wiring diagrams

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- DLC qualified. Please refer to www.designlights.org/QPL for most current information
- RoHS compliant. Consult factory for additional details
- Suitable for damp locations
- Designed for indoor use
- **Ingress Protection:** IP40
- Type IC rated for direct contact with insulation
- UL924 (EB14 option)
- Meets FCC Part 15, Subpart B, Class A standards for conducted and radiated emissions

APPLICATION REFERENCE

Open Space						
Spacing (ft)	Initial Delivered Lumens	Lumens	Wattage	LPW	w/ft ²	Average fc
8x8	40L	4,000	40	100	0.60	58
8x10					0.50	48
10x10					0.40	39
10x12					0.32	31

9' ceiling: 80/50/20 reflectances; 2.5' workplane, open room. LLF: 1.0 Initial Open Space: 50' x 40' x 9'


FLAT PANEL

1' X 4'

PHOTOMETRY

FP14-40L-35K-10V BASED ON DTC REPORT TEST #: PL07123-003

Luminaire photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a luminaire efficiency of 100%.

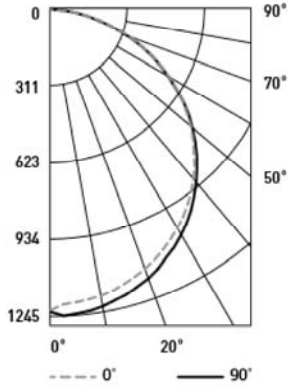

Initial Delivered Lumens: 3,619
Efficacy: 94.0 LPW
S/M: 1.26

Coefficients Of Utilization – Zonal Cavity Method				
RCC%:	80			
RW%:	70	50	30	10
RCR: 0	119	119	119	119
1	109	104	99	95
2	98	90	83	77
3	90	79	71	64
4	82	70	61	54
5	75	62	53	46
6	69	56	47	40
7	64	51	42	36
8	60	46	38	32
9	56	42	34	28
10	52	39	31	26

Effective Floor Cavity Reflectance: 20%

Zonal Lumen Summary			
Zone	Lumens	% Lamp	Luminaire
0-30	961	N/A	26.5%
0-40	1,580	N/A	43.7%
0-60	2,820	N/A	77.9%
0-90	3,619	N/A	100%

Reference <http://lighting.cree.com/products/indoor/troffers/essentia-by-cree-flat-panel> for detailed photometric data

Average Luminance Table (cd/m ²)				
Vertical Angle	Horizontal Angle			
		0°	45°	90°
	45°	3,162	3,204	3,199
55°	3,105	3,115	3,093	
65°	2,983	2,952	2,917	
75°	2,665	2,605	2,580	
85°	2,048	1,987	2,008	

© 2016 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. Patent www.cree.com/patents. Cree® and Essentia® are registered trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Northeast Energy Efficiency Partnerships, Inc. Armstrong® is a registered trademark of AWI Licensing LLC.

US: lighting.cree.com

T (800) 236-6800 F (262) 504-5415

Canada: www.cree.com/canada

T (800) 473-1234 F (800) 890-7507

ESSENTIA®
by **CREE** ⇄