

DEFINITE PURPOSE CONTACTORS (continued on next page)

Poles	F/L Inductive Amps	Locked Rotor Amps 240/480/600	Resistive Amps	Coil AC Volts	Coil VA Inrush 60 HZ	Coil VA Sealed 60 HZ	Coil VA Inrush 50 HZ	Coil VA Sealed 50 HZ	HP 120 Vac 1 PH	HP 240 Vac 1 PH	Model	Figure
1	30	150/125/100	40	24	28	5	31	6	1	2	H130A	1
				120							H130B	
				208/240							H130C	
2	40	240/200/160	50	24	28	5	31	6	2	3	H140A	2
				120							H140B	
				208/240							H140C	
2	30	150/125/100	40	24	30	6.5	33	8	2	3	H230A	3
				120							H230B	
				208/240							H230C	
2	40	240/200/160	50	24	30	6.5	33	8	2	3	H240A	4
				120							H240B	
				208/240							H240C	

3 and 4 POLE DEFINITE CONTACTORS AND REVERSING CONTACTORS pages 74-75.



Fig. 1 Single Pole

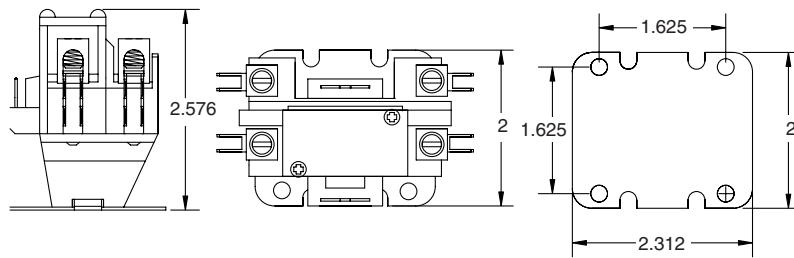


Fig. 2 Single Pole



Fig. 3 Two Pole

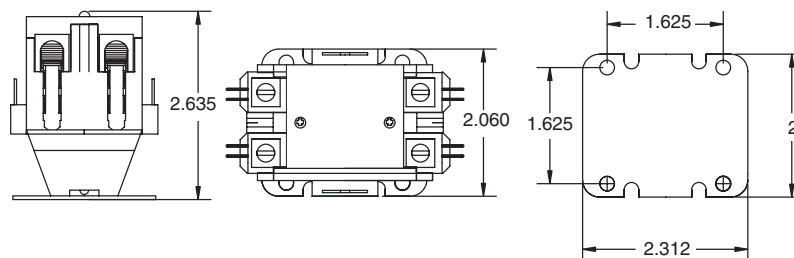


Fig. 4 Two Pole

- Fasco contactors meet specifications for devices up to 600 VAC in accordance with U.L. Bulletin No. 508, "Industrial Control Equipment."
- U.L. and CSA approved.
- Coils have Class B insulation.
- 30 Amp - Screws and quick connect terminals
- 40 Amp - Lugs and quick connect terminals