


With GE air conditioner disconnects, you get:

- Compact size
- Easy installation
- Fusible and non-fusible types
- Plastic and metal enclosures
- Puller and non-automatic switch type disconnects

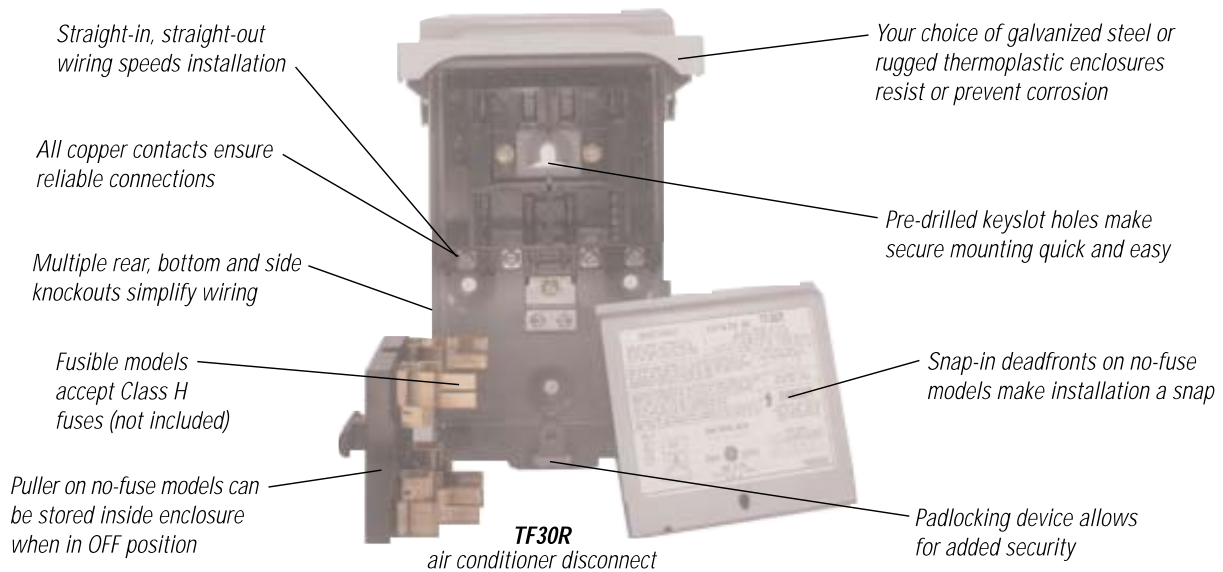

Schematic Diagram	Puller Type	Maximum Ampere Rating	Volts	Outdoor, Type 3R Catalog Number	Horsepower Rating	Lug Wire Range AWG Cu/Al
Thermoplastic-Enclosures — GE Noryl® Resin						
	Fusible	30	120-240	TPF30R	3	14-3
		60	120-240	TPF60R	10	
	No Fuse	60	240	TPN60R1	10	14-3
	Non-Auto Switch	60	240	TPNA60R1	10	14-3
Steel Enclosures						
	Fusible	30	120-240	TF30R	3	14-3
		60	120-240	TF60R	10	
	No Fuse	60	240	TFN60R	10	14-3
	Non-Auto Switch	60	240	TNA60R1	10	14-3

Application Information

UL Information

Fusible: **UL Listed** — UL869 Service Entrance

No Fuse: **UL Listed** — UL1429 Enclosed Pull-out Switch

cUL Listed — TFN60R only

NEC: **440-14**

Install Confidence. Install GE.



GE Industrial Systems

General Electric Company
 41 Woodford Avenue, Plainville, CT 06062
 www.GEindustrial.com