

GROUNDING

Ground Clamps

Heavy Duty Direct Burial with Lay-In Lugs

GLC Series





SPECIFICATIONS


- cULus Listed 467 Grounding & Bonding.
- UL467 Listed, Grounding & Bonding.
- Application: UL Listed for direct burial in earth and concrete, it can be used with rebar, copper water pipe, copper tubing and ground rods up to 1 inch in diameter.

FEATURES

- The ultimate ground clamp for large ground wires.
- This incredible ground clamp can handle just about any size ground wire and just about any application.
- Lay-in feature provides for the ultimate in flexibility.
- Convenient and pre-assembled screws are 304 stainless steel.

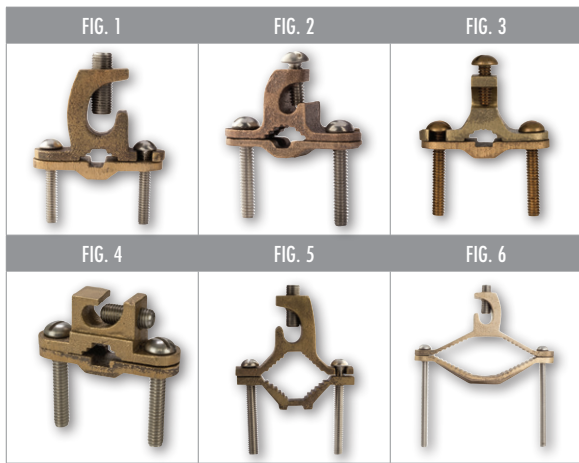

GLC-12 DB



GLC-140 DB

CAT. NO.	FIG. NO.	CERTIFICATION	PIPE SIZE (IPS) (IN.)	GROUND WIRE RANGE	REBAR SIZE (IN.)	GROUND ROD SIZE (IN.)	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	STD. CTN. QTY.
GLC-140DB	1	cULus	1/2-1	8 STR-4/0 STR	3/8-1	1/2-1	2.551	0.784	2.132	10
GLC-12DB	2	UL	1/2-1	#10-2 STR	3/8-1	1/2-1	2.281	0.714	1.382	25
GLC-12RDB	3	UL	1/2-1	#10-2 STR	3/8-1	1/2-1	2.283	0.670	1.385	25
GLC-12HDB	4	UL	1/2-1	#10-2 STR	3/8-1	1/2-1	2.362	0.708	1.200	25
GLC-240DB	5	cULus	1 1/4-2	#8-4/0 STR	-	-	3.319	0.693	3.190	6
GLC-440DB	6	cULus	2 1/2-4	#8-4/0 STR	-	-	5.688	0.823	3.743	3



Scan QR code
for mobile access to
Grounding drawings.