

TABLE 6
Replacement CSA Coppertop Compression Connectors

Conductor Size and Type				Catalog Number
Stranded		Solid		
Concentric or Compressed, or Compact				
AWG	mm ²	AWG	mm ²	
#6	16	#4	—	CC2C01TCSA
#4	—	#3	—	CC2C02TCSA
#3	—	#2	25	CC2C03TCSA
#2	25	#1	35	CC2C04TCSA
#1	35	1/0	50	CC2C05TCSA
1/0	50	2/0	70	CC2C06TCSA
2/0	70	3/0	—	CC2C07TCSA
3/0	—	—	—	CC2C08TCSA
4/0	95	—	—	CC2C09TCSA

* Compressed stranding only.

Note: Coppertop compression connector may be used on both aluminum and copper cable conductors.

TABLE 7
Replacement Parts

Description	Catalog Number
Hold Down Bail Assembly	2638351C01B
Loadbreak Probe Installation Tool	2602733A01
Loadbreak Probe Only	2637794B01`
Probe Kit (includes Probe, Installation Tool, Silicone Lubricant, Installation Instruction Sheet)	PK225
Silicone Grease 0.175 oz tube (5 grams) 5.3 oz tube (150 grams)	2603393A03 2605670A02M
Test Point Cap	2605725A54
Includes Ground Braid, Constant Force Spring and Mastic	GRDBRAIDKIT

ACCESSORIES

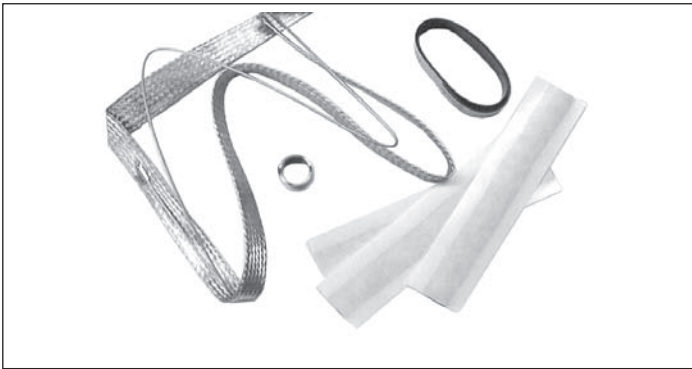


Figure 5.
Braided ground strap kit.