


INCANDESCENT

Floodlight Series *Lifetime Guarantee Against Rust and Corrosion. 150 Watts Maximum*



Designed specifically to withstand the corrosive atmosphere of coastal areas, these directional floodlights can weather the most severe environments. **Rustproof.** These versatile luminaires are constructed of virtually unbreakable, nonconductive **polycarbonate** and provided with stainless steel hardware. Perfectly suited for landscape, flood, and spot lighting. Surface Mount Wiring Box accessory eliminates the need for a recessed junction box in wall and ceiling installations.

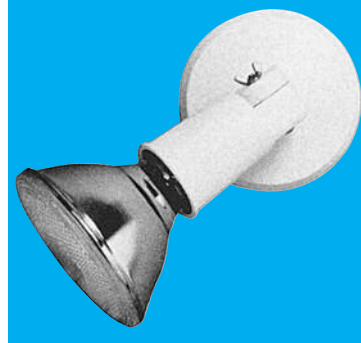

101-W Shown in White



150-W Shown in White

Specifications

Socket Housing/Cover: Injection molded of UV-stabilized **polycarbonate**. Lampholders on Model 201 rotate independently. Threaded pivot of Model 150 is .50" NPT.

Socket: High-temperature phenolic with medium base nickel-plated copper screw shell. Rated 250V, 660W, with wire leads insulated to 105°C.

Gasket: Silicone rubber washer (.125" thick) is permanently secured within lampholder to seal socket and wireway from moisture with insertion of lamp. Fiber washers provide watertight seal between pivot joints.


Hardware: Stainless steel phillips truss head screw and wing nut allow angular adjustment to all lampholders. Crossbar and stainless steel mounting screw included with Models 101 and 201. NPT nylon locknut (.50") included with Model 150.

Lamp: Provided by others. Uses brass-skirted Par 38 lamp. 150 watts maximum. Recommended lamp: 90 watt Halogen 130 volt for greater efficiency and longer lamp life.


Hood (optional): One piece, injection molded UV-stabilized **polycarbonate**. Snap-fit mounting requires no tools or hardware. Helps with light control. Adds an aesthetic value to any application. (Recommended for Lamp-up applications.)

Surface Mount Wiring Box (optional): For Models 101 and 201 only. One piece injection molded of UV-stabilized **polycarbonate**. Measures .625" deep. Includes .125" thick closed-cell neoprene rubber gasket to seal against moisture and contaminants. Easily attaches with screws or nails.

Power Cord (Model 101-S): Six-foot SJT 18-gauge two-conductor rated 105°C. (For Model 101-S only) (Model 101-S Not UL Listed.)

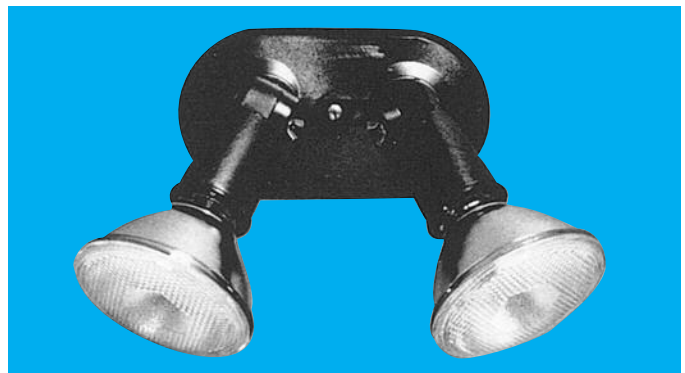

201-BK Shown in Black

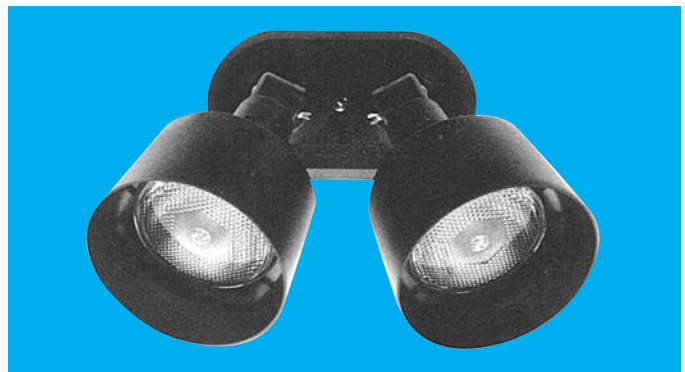

201-BK with Two 400-BK Hoods (Black)



1BW Surface Mount Wiring Box (White)



2BW Surface Mount Wiring Box (White)

ETL-US Listed For Wet Locations.

All polycarbonate components meet Underwriters Laboratories 746C tests for polymeric material and carry a flammability rating of 94-5V.

Luminaire Type _____
 Catalog Number _____
 Job Name _____
 Approval _____

WF Harris Lighting

Innovative Lighting Designs Since 1970

"A Live Operator Company Standing Ready to Serve Your Lighting Needs"

INCANDESCENT

Ordering Information (Fill In Blanks For Complete Catalog Number)

Model Model	Color	Options	Color	Option	Accessories (Order separately)
101	Single Floodlight		BK -Black	PC -Photo Control (Model 201 Only)	HOOD (Model 201 Requires Two)
101-S	Stake Floodlight		W - White		400BK -Black
150	Threaded Floodlight		BZ -Bronze	WH -Weep Holes for Up-Aimed Fixtures	400W -White
201	Double Floodlight				400BZ -Bronze
					SURFACE MOUNT WIRING BOX FOR MODEL 101
					1BK -Black
					1BW -White
					1BZ -Bronze
					SURFACE MOUNT WIRING BOX FOR MODEL 201
					2BK -Black
					2BW -White
					2BZ -Bronze



Model 201 Shown
With Photo Control




Model 101 Shown With
Surface Mount Wiring Box




Model 201 Shown With
Surface Mount Wiring Box


Dimensions

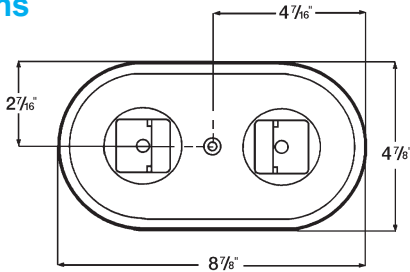


Model 201



Model 101

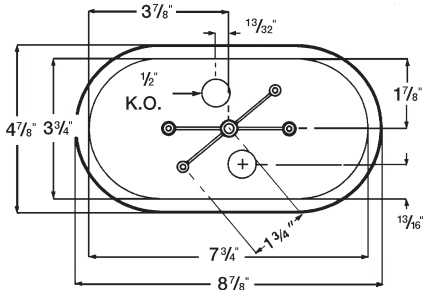

Surface Mount Wiring Box For Model 201



Surface Mount Wiring Box
For Model 101

Specifications Subject to Change Without Notice

Luminaire is Warranted to be Free of Defects in Materials and Workmanship for One Year From Invoice Date.

HOUSING/HOOD CARRY A LIFETIME WARRANTY.

MADE IN USA

WF Harris Lighting

Innovative Lighting Designs Since 1970

P.O. Box 5023, Monroe, NC 28111-5023, USA

(704) 283-7477 (OPERATOR ASSIST) • (704) 283-6880 (FAX)

(800) 842-9345 (TOLL FREE)

e-mail: customerservice@wfarris.com

www.wfharrislighting.com