



Wet Location

Project Information	
Job Name	
Fixture Type	Industrial LED Wet Location
Catalog Number	ILW25LED2
Approved by	

ILW25LED2 2FT Industrial LED



SPECIFICATIONS:

- Lumens:** 2,803
- Watts:** 25.13
- Lumens/Watt:** 111
- CRI:** 82
- CCT:** 4013
- Lifespan:** 100,000+

Construction:

The 1-piece housing is made of durable composite material with 1/2" entry points on both ends. The poured gasket provides a continuous seal for the lens. Six polycarbonate cam latches compress lens to housing for a tight seal. Stainless steel mounting brackets are furnished with each fixture.

Lens:

Injection molded acrylic lens with high impact additive. Lens is ribbed and frosted to eliminate glare.

Listings:

Luminaire is certified to cUL Standards for Wet Locations
Lighting Facts Certified
DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

AC Input:

120/208/240/277 V

Driver:

Constant current, Class 2 120-277 VAC, 47-63Hz
High Efficiency – min. 81%
Off-State Power: 0 Watts
Dimming – 10-100%

LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. LEDs manufactured for the ILW series utilize Epoxy Guard conformal coating which reduces the chance of board corrosion.

ILW series fixtures operate at 4100K CCT

Delivers 70% or greater of initial lumens at 100,000 hours

Temperatures:

Min Start: -40°C Max: 40°C

Ratings:

NEMA4X
IP65
NSF

Warranty:

Five-year limited warranty

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80

Installation:

Fixture retains the same knock-out sizes and positions as previous models, reducing wiring costs.

Applications:

Cold storage, garages, refrigerated cases, stairwells, storage areas, fuel pump canopy.

Weight:

4.4 lbs.


Options:

L = Stainless Steel Latches, 3C = 3' Cord, 6C = 6' Cord



Patent Pending

DIMENSIONS:

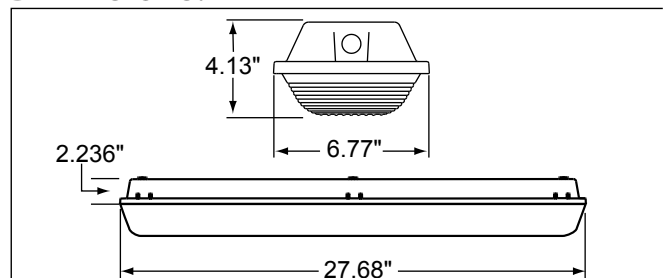

**Rebates and Incentives are available in many areas.
Contact an Atlas Representative for more information.**

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
800-849-8485 | FAX: 336-227-0110 | www.atlaslightingproducts.com

Made in the USA of US and imported parts. Meets Buy American requirements within the ARRA.

IP RATING

	DESCRIPTION	DEFINITION
6	Dust-tight	No ingress of dust
5	Protects against water jets	Water projected from a nozzle against the enclosure from any direction shall have no harmful effect.

Atlas Lighting Products

lighting facts[®]

A Program of the U.S. DOE

Light Output (Lumens)	2803
Watts	25.13
Lumens per Watt (Efficacy)	111.54

Color Accuracy Color Rendering Index (CRI)	82
--	-----------

Light Color
Correlated Color Temperature (CCT) **4013 (Bright White)**

Warm White
Bright White
Daylight

2700K
3000K
4500K
6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: PRB4-PG7LGH (12/10/2014)
Model Number: ILW25LED2D
Type: Luminaire - Linear