

Products

- › [Index](#)
- › [Featured Products](#)
- › [Cross Reference](#)
- › [UPC Search](#)

Product Datasheet

[Catalog Home](#) [Home Page](#)

**3402 -- Straight Liquidtight Connector 1/2"
Trade Size**



Product Specifications

Family	Liquidtight Conduit and Cord Connectors
Fittings Classification	Steel / Malleable Iron - Straight Connectors
Sub Class	Uninsulated
Trade Size	1/2"
Standard Packaging	Carton
Ship Carton Length	11.375
Ship Carton Width	9.00
Ship Carton Height	11.25
WT. PER HU.	17.5
Dimension A	1-3/16"
Dimension B	1/2"
Thread Spec. B	1/2-14 NPT
Dimension C	1-15/32"
Unit Carton Quantity	50
Ship Carton Quantity	200
UPC Number	05016903402

Applications


- | For use in outdoor or indoor locations on flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- | Use to positively bond the conduit to a box or enclosure
- | RACO® liquidtight connectors are suitable for use in Class 1, Division 2; Class 2, Division 1 and 2; and Class 3, Division 1 and 2 hazardous locations

Product Features

- | Patented split gland-ring is designed to slip onto the conduit quickly and to grip the jacket of the conduit, speeding installation, assuring a perfect seal, and preventing pullouts
- | All components are reusable -- RACO® liquidtight connectors may be easily disassembled and reused after years of service
- | Sealing washer (included) provides a liquidtight seal when terminating the connector in a threadless opening
- | Heavy duty locknut included with every RACO® liquidtight connector assures continuity of ground
- | All metallic components are zinc electro plated for added corrosion protection
- | •Bodies - 3/8" to 1" Steel ; 1-1/4" to 4" Malleable Iron ; •Nuts - 3/8" to 1" Steel ; 1-1/4" to 4" Malleable Iron

Compliances

UL CSA

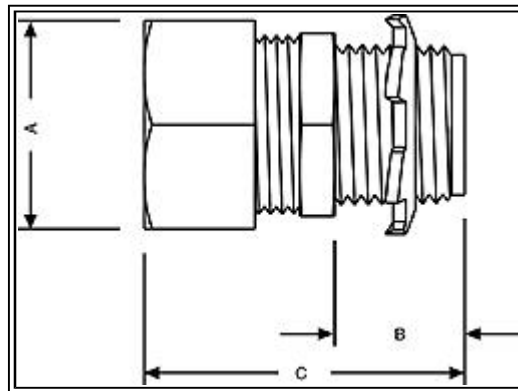

[Login](#) | [Privacy](#) | [Site Map](#)

© 2003 RACO - a hubbell company. All right reserved.