



Application

- For use whenever weatherproof protection is required for an outdoor receptacle



Product Features

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Vertical mount covers are padlockable, 1/4" diameter hole
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions


Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated


TWO-GANG DEVICE COVERS

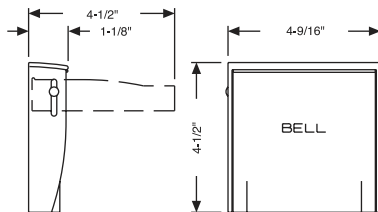


5032-0




5033-0




5034-0



5036-0




5038-0




5040-0




5041-0



5042-0



5043-0



5045-0

ORDERING INFORMATION - DIMENSIONS

VERTICAL MOUNT - PADLOCKABLE					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5032-0	Gray	(2) Duplex	Shrink	6	
5033-0	Gray	(1) Duplex & (1) GFCI	Shrink	6	
5034-0	Gray	(1) 30-50A Receptacle 2.625" diameter	Shrink	6	
5036-0	Gray	(1) 30-50A Receptacle 2.156" diameter	Shrink	6	
5038-0	Gray	(2) Receptacles, 1.406" diameter	Shrink	6	
5040-0	Gray	(1) Single Receptacle, 1.406" diameter & (1) GFCI	Shrink	6	
5041-0	Gray	(2) Toggle	Shrink	6	
5042-0	Gray	(1) Toggle & (1) Duplex	Shrink	6	
5043-0	Gray	(1) Toggle & (1) GFCI	Shrink	6	
5045-0	Gray	(2) GFCI	Shrink	6	