

TaskWork Linear

12 Volt & 24 Volt Xenon

Innovation
takes flexibility
to the max



10215 BK
shown Actual Size:
1-15/16"L x 11/16"W x 3/4"H
in Black




10215 WH
shown Actual Size:
1-15/16"L x 11/16"W x 3/4"H
in White



TaskWork Linear

12 Volt & 24 Volt Xenon

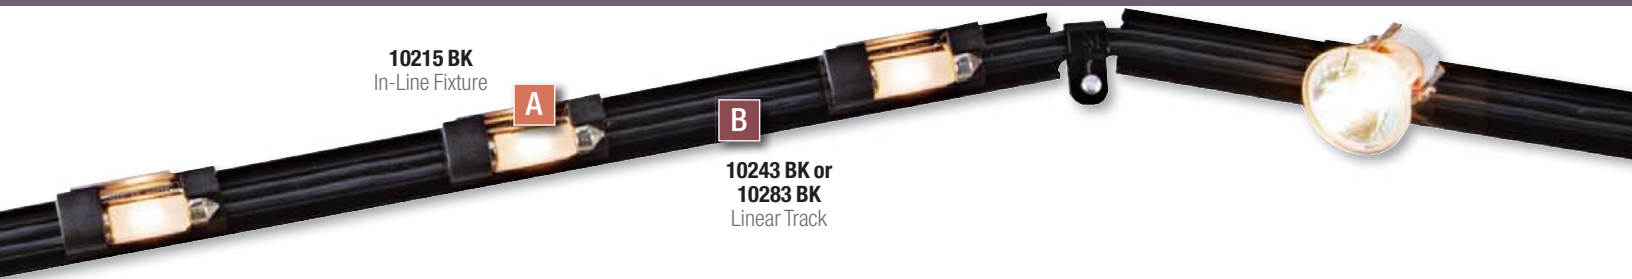

10215 BK
In-Line Fixture

A

B

**10243 BK or
10283 BK**
Linear Track

STEP 1 EASY-TO-INSTALL TRACK

- B** **10243 BK, WH (50 pack)**
10283 BK, WH (10 pack)
- Snaps on the score, every 6"
 - Captive screws every 6"
 - White or Black finish
 - 4' linear track

Accessories

- 10240 BK, WH – Wire End Caps**
10241 BK, WH – Track End Caps
10298 WH – Double-Sided Tape (1/2" x 15')
10299 – Box of Screws (100 pieces)

10240 BK, WH
Wire End Caps



10241 BK, WH
Track End Caps



10244 BK, WH
Splicing Block
Connector
(listed enclosure
required)



STEP 2 LOW-VOLTAGE CABLE

- C** **10230 BK, WH – Linear cable 25 feet**
10232 BK, WH – Linear cable 100 feet
10233 BK, WH – Linear cable 500 feet
10234 BK, WH – Linear cable 1000 feet

Stabilizer Clip

10242 BK, WH

- Designed to attach Kichler Linear SPT cable to any wood surface
- Prevents cable from sagging
- Allows for making turns in cable in areas where cable is not supported by track

Splicing Block Connector

10244 BK, WH (listed enclosure required)

10254 BK, WH - Splicing Block with Enclosure

- Four connections allow up to four rounds of NM or Kichler's SPT cable in any combination
- Possible combinations
 1. NM cable in and up to three SPT cables out
 2. SPT cable in and up to three SPT cables out
 3. NM cable in and up to three NM cables out. All wiring should be in accordance with local and national codes

10254 BK, WH
Splicing Block
with Enclosure



STEP 3 SELECT NUMBER OF IN-LINE OR DIRECTIONAL FIXTURES AND FINISH. FOR IN-LINE, SELECT VOLTAGE & WATTAGE. FOR DIRECTIONAL, SELECT 12° SPOT OR 26° FLOOD & VOLTAGE.

A In-Line Fixture

- 10215 BK, WH – 12 Volt/5 Watt**
10216 BK, WH – 12 Volt/10 Watt
10217 BK, WH – 24 Volt/5 Watt
10218 BK, WH – 24 Volt/10 Watt
- Shipped with frosted bulb pre-installed
 - Easy to handle, no sharp edges, no bent reflectors
 - Less than width of track

In-Line Replacement Lamps

- 10245 – 12 Volt/5 Watt**
10246 – 24 Volt/5 Watt
10247 – 12 Volt/10 Watt
10248 – 24 Volt/10 Watt
- Bright Xenon bulb
 - Frosted for no glare
 - 5 or 10 Watt options

Multi-Directional Fixture

10261 BK, WH

- Order bulbs separately
- G4, MRC-11
- Added versatility for your Linear Lighting
- Highlight architectural features
- Overall dimensions (with bulb) 2-1/4"H x 1-1/2"W x 1-1/2"H
- Maintain clearance of 3" from other surfaces. Space no closer than 3" from other lampholders

Multi-Directional Lamps

- 10256 CLR – 12 Volt, 12° spot (20-Watt)**
10257 CLR – 12 Volt, 26° flood (20-Watt)
10258 CLR – 24 Volt, 12° spot (20-Watt)
10259 CLR – 24 Volt, 26° flood (20-Watt)
- Rated life 2,000 hours

AVAILABLE FINISHES

Black (BK) and White (WH)



10215 BK
In-Line Fixture




10215 WH
In-Line Fixture

10261 BK, WH
Multi-Directional Fixture
with
10256 CLR
Multi-Directional Lamp





10230 BK
Linear Cable

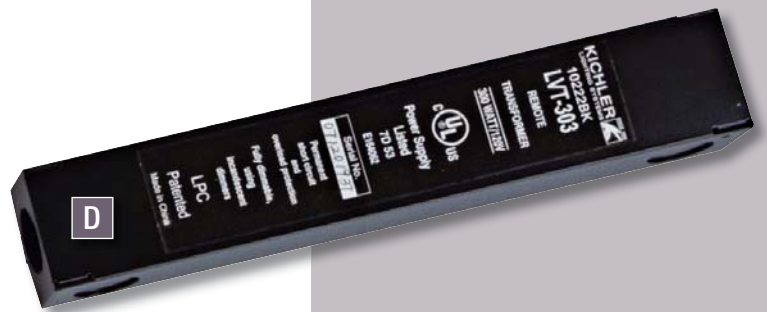

10222 BK
Remote Electronic
Transformer

STEP 4

SELECT POWER SUPPLY MORE THAN ONE POWER SUPPLY MAY BE NEEDED

- Resettable short-circuit protection
- Built-in overload protection
- All transformers are UL 2108 listed
- Magnetic Premium Transformers have screw terminals for faster wiring, no wire nuts. Slim profile allows for easily concealed mounting.

Electronic/Plug-In Transformers

- 10210 BK – 12 Volt/150 Watt Electronic Hardwire Transformer**
- 35-Watt minimum load required
 - 1-1/2"D x 4"H x 4"L (not shown)

10214 BK, WH – 12 Volt/75 Watt Electronic Plug-in Transformer

- 10' of linear cable attached
- 3"D x 9"H x 5"L

Remote Electronic Transformers

D 10221BK – 12 Volt/150 Watt Enclosed Electronic, Hardwire Transformer

- 20 Watt min. load required
- 1-1/2"D x 1-1/2"H x 6-1/2"L

10222BK – 12 Volt/300 Watt Enclosed Electronic, Hardwire Transformer

- 50 Watt min. load required
- 1-1/2"D x 1-1/2"H x 9-1/2"L

Remote Magnetic Transformers

- 10205 BK – 12 Volt/150 Watt Magnetic**
- 3-1/2"D x 6"H x 3"L

- 10204 BK – 12 Volt/300 Watt Magnetic**
- 4-1/8"D x 6"H x 3-1/2"L

- 10206 BK – 12 Volt/2 x 300 Watt Magnetic**
- 5"D x 9-1/2"H x 4-1/2"L

- 10208 BK – 24 Volt/300 Watt Magnetic**
- 4-1/8"D x 6"H x 3-1/2"L

- 10209 BK – 24 Volt/600 Watt Magnetic**
- 4-7/8"D x 9-1/2"H x 4-1/2"L

- 10219 BK – 24 Volt/2 x 600 Watt Magnetic**
- 6"D x 10-1/2"H x 5-1/2"L

Remote Magnetic Premium Transformers- Exclusively by Kichler®

- 10207 WH – 12 Volt/150 Watt magnetic**
- 6-3/4"D x 2-5/16"H x 10"L

- 10213 WH – 12 Volt/300 Watt magnetic**
- 6-3/4"D x 2-5/16"H x 10"L

- 10211 WH – 12 Volt/2 x 300 Watt**
- 6-3/4"D x 2-5/16"H x 10"L



10222 BK
Hardwire Electronic
Transformer



10210 BK
Hardwire Electronic
Transformers



10214 BK, WH
Plug-In Electronic
Transformers



10219 BK (shown)
10208 BK
10209 BK
Magnetic Transformers




10206 BK (shown)
10204 BK
10205 BK
Magnetic Transformers



10207 WH (shown)
10213 WH
10211 WH
Magnetic Premium
Transformers

FRONT MOUNT DESIGN

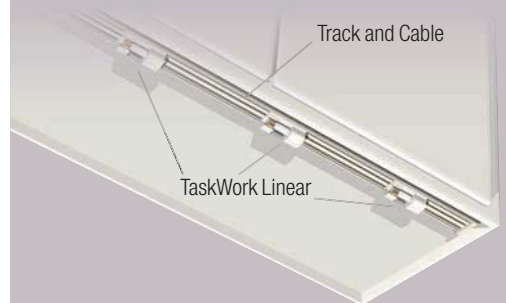

FEATURES

- Low profile
- Flexible installation
- Black and White finish
- 12 Volt and 24 Volt options
- 5-Watt and 10 Watt options
- cUL Listed

PERFORMANCE DATA (10216 10 WATT ON 4" CENTER)

	LUMENS/WATT	4.8
A	LIGHT OUTPUT FC (COUNTER FRONT)	14
B	LIGHT OUTPUT FC (COUNTER MIDDLE)	27
C	LIGHT OUTPUT FC (COUNTER BACK)	32
D	LIGHT OUTPUT FC (COUNTER WALL)	28
	CRI (COLOR RENDERING)	100
	CCT (COLOR TEMPERATURE)	2800K
	LIGHT SOURCE LIFE (HRS)	3,000

