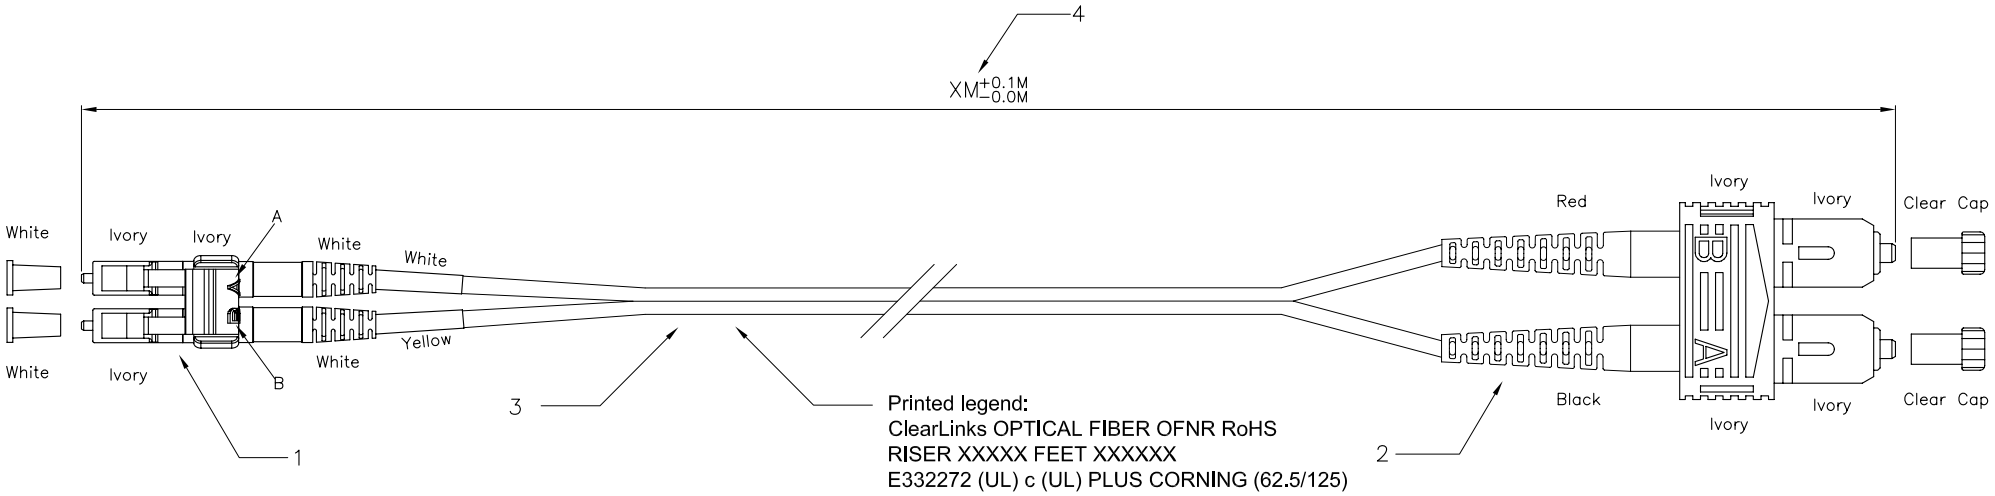

Specification:

1. Connector Type : LC Multimode (easy removable clip and Short Boot)
2. Connector Type : SC Multimode
3. Cable Type :
   3−1 Zipcord Cable, ø2.0mm, 62.5/125um Multimode.
   3−2 Cable Jacket : Orange Color, PVC Material.
4. Length : XM

Performance:

a. Insertion Loss : <0.5 dB
b. Fiber Extention : −0.05um < H < +0.05um
c. ø1.25mm Ferrule End−face Radius : 7 < R < 25mm
   ø2.5mm Ferrule End−face Radius : 10 < R < 25mm
d. Apex Offset : < 50um
e. Insertion Loss will be Increased after 500 mating : 0.2 dB Max
f. Operating Temperature : −20°C to +70°C
g. Storage Temperature : −40°C to +80°C

UNIT M / M	DSGN	08.APR.2013	Connie	ITEM NO: LC to SC Duplex Patch Cord
SCALE 1/1	CHK	08.APR.2013	Maer	62.5/125 LC-SC XM/OR
DWG NO:	APPR	08.APR.2013	Frank	CP Technologies