

# SHOE BOX & WALL PACK RETROFITS G4 HORIZONTAL MOUNTING



VOLTAGE**	MEDIUM + MOGUL BASES	INSTALL METHOD	OPERATING TEMP	ACTIVE COOLING	SURGE PROTECTION	CRI	RATED LIFE	WARRANTY

## directional efficiency



- 50W, 80W and 110W models replacing up to 400W HID
- Light panel can rotate once the base is tightened to direct light out of the fixture
- Includes a fan and thermal sensor to run cool and ensure a long and bright life
- Enclosed fixture safe and approved for damp locations
- USA designed and specified driver
- Available in 3000, 4000 and 5000K

includes support feet to prevent socket sag\*

\*LED-8089 and 8090 only

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)*	BASE
LED-8088E50-G4	844006083427	up to 175W HID	50W	6250	5000K	E26
LED-8088M50-G4	844006083472	up to 175W HID	50W	6250	5000K	EX39
LED-8089M50-G4	844006083526	up to 250W HID	80W	10000	5000K	EX39
LED-8090M50-G4	844006083571	up to 400W HID	110W	13750	5000K	EX39

\* See page 2 for additional color temperatures.

\*\* See page 2 for 347 volt options for Canada. 🇨🇦




FOR PRODUCT INFO ("LED" MODEL #) CONTACT.....Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
 FOR PRODUCT INFO ("RP" MODEL #) CONTACT.....RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

12.10.18 Information is subject to change without notice.


# SHOE BOX & WALL PACK RETROFITS G4 HORIZONTAL MOUNTING




LED-8088E




LED-8088M



LED-8089M

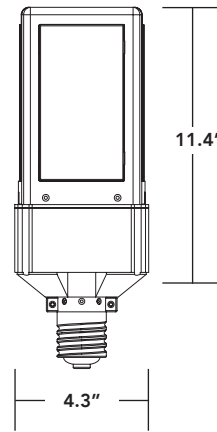

LED-8090M

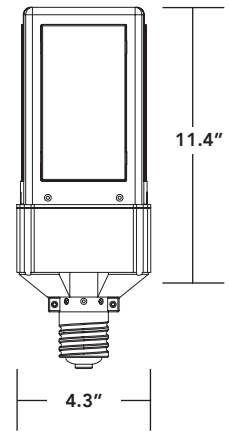

**LED-8088 RECOMMENDED MINIMUM FIXTURE SIZE**  
5.4" w x 11.9" h / 347 cu. in. volume

**LED-8089/LED-8090 RECOMMENDED MINIMUM FIXTURE SIZE**  
6" w x 12" h / 432 cu. in. volume

## ORDERING GUIDE

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE
LED-8088E30-G4	844006083380	UP TO 175W HID	50W	5750	3000K	E26
LED-8088E40-G4	844006083403	UP TO 175W HID	50W	6250	4000K	E26
LED-8088E50-G4	844006083427	UP TO 175W HID	50W	6250	5000K	E26
LED-8088M30-G4	844006083434	UP TO 175W HID	50W	5750	3000K	EX39
LED-8088M40-G4	844006083458	UP TO 175W HID	50W	6250	4000K	EX39
LED-8088M50-G4	844006083472	UP TO 175W HID	50W	6250	5000K	EX39
LED-8089M30-G4	844006083489	UP TO 250W HID	80W	9200	3000K	EX39
LED-8089M40-G4	844006083502	UP TO 250W HID	80W	10000	4000K	EX39
LED-8089M50-G4	844006083526	UP TO 250W HID	80W	10000	5000K	EX39
LED-8090M30-G4	844006083533	UP TO 400W HID	110W	12650	3000K	EX39
LED-8090M40-G4	844006083557	UP TO 400W HID	110W	13750	4000K	EX39
LED-8090M50-G4	844006083571	UP TO 400W HID	110W	13750	5000K	EX39

**347 VOLT OPTIONS FOR CANADA**

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE
LED-8088E40C-G4	844006083397	175W HID	50W	6250	4000K	E26
LED-8088E50C-G4	844006083410	175W HID	50W	6250	5000K	E26
LED-8088M40C-G4	844006083441	175W HID	50W	6250	4000K	EX39
LED-8088M50C-G4	844006083465	175W HID	50W	6250	5000K	EX39
LED-8089M40C-G4	844006083496	250W HID	80W	10000	4000K	EX39
LED-8089M50C-G4	844006083519	250W HID	80W	10000	5000K	EX39
LED-8090M40C-G4	844006083540	400W HID	110W	13750	4000K	EX39
LED-8090M50C-G4	844006083564	400W HID	110W	13750	5000K	EX39



FOR PRODUCT INFO ("LED" MODEL #) CONTACT.....Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com  
 FOR PRODUCT INFO ("RP" MODEL #) CONTACT.....RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com