

Industrial Grade

CAM-TYPE CONNECTORS (UP TO 400A, 600V)

16 Series, Taper Nose



16D28-W



16D37-H


Description	Color	Cat. No.	Cat. No.	Cat. No.
		Complete	Contact	Insulator
Male Detachable Plug - Crimped (Cable Size: 3/0-4/0)	White	16D28-W	16D28-C	16SDM-14W
	Black	16D28-E	16D28-C	16SDM-14E
	Brown	16D28-H	16D28-C	16SDM-14H*
	Red	16D28-R	16D28-C	16SDM-14R
	Blue	16D28-B	16D28-C	16SDM-14B
	Orange	16D28-O	16D28-C	16SDM-14O
	Green	16D28-G	16D28-C	16SDM-14G
	Yellow	16D28-Y	16D28-C	16SDM-14Y
Female Detachable Plug - Crimped (Cable Size: 3/0-4/0)	White	16D37-W	16D37-C	16SDF-14W
	Black	16D37-E	16D37-C	16SDF-14E
	Brown	16D37-H	16D37-C	16SDF-14H*
	Red	16D37-R	16D37-C	16SDF-14R
	Blue	16D37-B	16D37-C	16SDF-14B
	Orange	16D37-O	16D37-C	16SDF-14O*
	Green	16D37-G	16D37-C	16SDF-14G*
	Yellow	16D37-Y	16D37-C	16SDF-14Y*

* Contact factory for availability.


TESTING AND CODE COMPLIANCE

- Meets UL Standards (File #E13399)
- NEMA 3R-Rated for use outdoors
- CSA Certified (File #152105)

DIMENSIONS

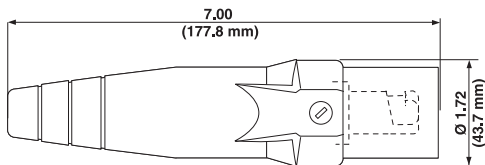

Male Detachable Plug - Crimped

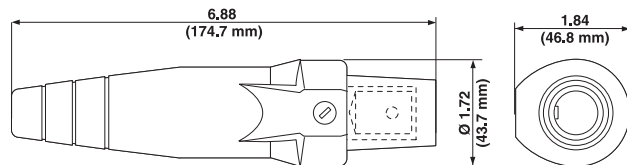

Female Detachable Plug - Crimped