





30 AMP/50 AMP Dual Power Attachment Plugs



30 AMP 125V/50 AMP 125V Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Dual-Power Vinyl Angle Plug, Interchangeable Blades	930	Black	.630–1.050	6 max.	5-30P 
					5-50P 



30 AMP 250V/50 AMP 250V Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Dual-Power Vinyl Angle Plug, Interchangeable Blades	931	Black	.630–1.050	6 max.	6-30P 
					6-50P 


30 AMP 125/250V/50 AMP 125/250V Non-Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Dual-Power Vinyl Angle Plug, Interchangeable Blades	287-T	Black	.687–1.050	6 max.	10-30P 
					10-50P 


30 AMP 125/250V/50 AMP 125/250V Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Dual-Power Vinyl Angle Plug, Interchangeable Blades	275-T	Black	.750–1.125	6 max.	14-30P 
					14-50P 

30 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Travel Trailer Vinyl Angle Plug, for use with 7313 Receptacle	830-T	Black	.687–.875	6 max.	ANSI Std. C73.13 TT-30P 

All devices are UL Listed and CSA Certified.

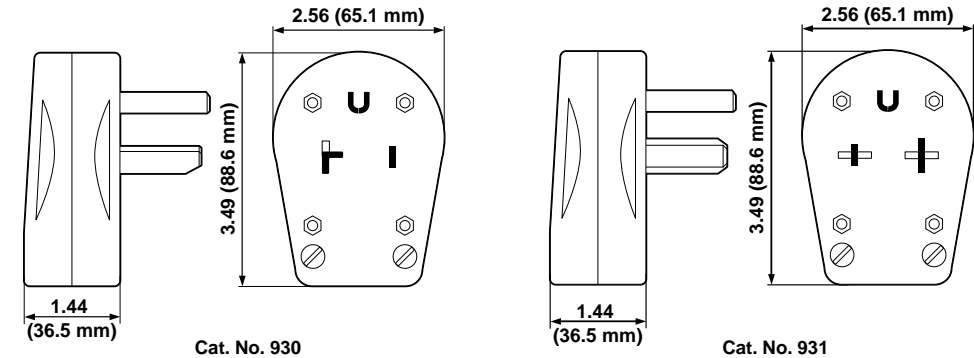

SPECIFICATIONS & FEATURES

- Tough thermoplastic shell for long life
- Shell and bottom are hinged in front for ease of assembly
- Solid brass blades with color-coded terminals simplify wiring
- Each dual combination plug supplied with 30A blades and flat 50A blade
- Dead front right angle construction
- Interchangeable blades eliminate need for stocking different devices
- Built-in rejection feature prevents closure if blades are incorrectly positioned
- Versatile cord clamp suitable for use with Nos. 14, 12, 10, 8 and 6 AWG round cord and Nos. 10/3 SRDT, 8/2-10/1 SRDT and 6/2-8/1 flat wire
- Wiring stripping gauge molded into plug cover

TESTING & CODE COMPLIANCE

- Meet NEMA requirements
- UL Listed (File #13393)
- CSA Certified (File #LR-406)
- NOM Certified (File #057)
- Backed by a Limited 10-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94
Operating Temperature: -40°C to 65°C