

## QuickPort® Field-Configurable Single-Gang and Dual-Gang Multi-Port Wallplates with Designation ID Kit

### APPLICATION

Single-Gang and Dual-Gang wallplates accept QuickPort® snap-in modules to support multimedia station applications with 1, 2, 3, 4, 6, 8 and 12 ports. Use where port I.D. windows in a single-gang or dual-gang economical flush-mount housing is desired.

### STANDARDS COMPLIANCE

Meets or exceeds all applicable standards: UL Listed; CSA Certified; complies with TIA/EIA-568-B; and meets FCC Part 68.

### SINGLE-GANG PHYSICAL SPECIFICATIONS

- Capacity: Single-gang: Available in 1-, 2-, 3-, 4- or 6-port versions
- Capacity: Single-gang: Available in 1-, 2-, 3-, 4-, 6-, 8- or 12-port versions
- Materials: High-impact, fire-retardant plastic rated UL 94V-0
- Dimensions: Single-gang: 4.53"H x 2.75"W x .925"D (in-wall depth, loaded)  
Dual-gang: 4.53"H x 4.625"W x .925"D (in-wall depth, loaded)

### DESIGN CONSIDERATIONS

- Single-gang fits standard NEMA single-gang backboxes; dual-gang fits both single- and dual-gang standard NEMA backboxes.
- Put blanks (PN# 41084-B\*B) in unused ports for future expansion.
- Specify port identification method (colored modules, designation labels and custom silkscreening available). To ID ports, use different colored jacks for each application (full selection of TIA/EIA-606 compatible colors, 13 available), or Leviton's pre-printed Port Designation Labels. (PN#: 41080-LXB)
- The higher port versions (4, 6, 8 and 12 ports) may be used for MUTO (multi-user telecommunications outlet) applications.

See ELECTRONIC FILES for CAD files (.DXF, .DWG, MS-DOS.EPS) on disk



### UNIQUE FEATURES

- Color choice of white, grey, ivory and black
- Station ID designation windows for each wallplate
- Color-matched wallplate screws
- Fits within minimum rectangular NEMA openings
- Compatible with all individual QuickPort modules
- Individual-port configurability allows specification flexibility
- Narrow module width allows high port density in a small area

### WARRANTY INFORMATION

For a copy of Leviton product warranties, log on to [www.levitonvoicedata.com/warranty](http://www.levitonvoicedata.com/warranty).

For ELECTRONIC Typical Specs see (.TXT) file on disk.

### TYPICAL SPECIFICATION

The wallplate housing shall be a one-piece, single- or dual-gang flush mount style that fits standard NEMA openings. It should provide 1, 2, 3, 4, 6, 8 or 12 ports. Must be able to accept all Leviton QuickPort modules. It must be made of high-impact, fire-retardant plastic rated UL 94V-0, and be UL Listed, CSA Certified, and compliant with FCC Part 68 and TIA/EIA-568-B specifications. Colors, port counts and configurations to be specified per schedule on plan. Wallplate screws must match wallplate color.

QuickPort® Field-Configurable Single-Gang and Dual-Gang



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.  
Spec sheets and updates are also available at [www.levitonvoicedata.com](http://www.levitonvoicedata.com).

2222 - 222nd St. SE • Bothell, WA 98021 USA  
Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available




# QuickPort® Field-Configurable Single-Gang and Dual-Gang

**Part Numbers**  
**42080-xxS**  
**42080-xxP**

## DIMENSIONAL LINE ART

See ELECTRONIC FILES for CAD images  
 (.DXF, .DWG, MS-DOS.EPS)

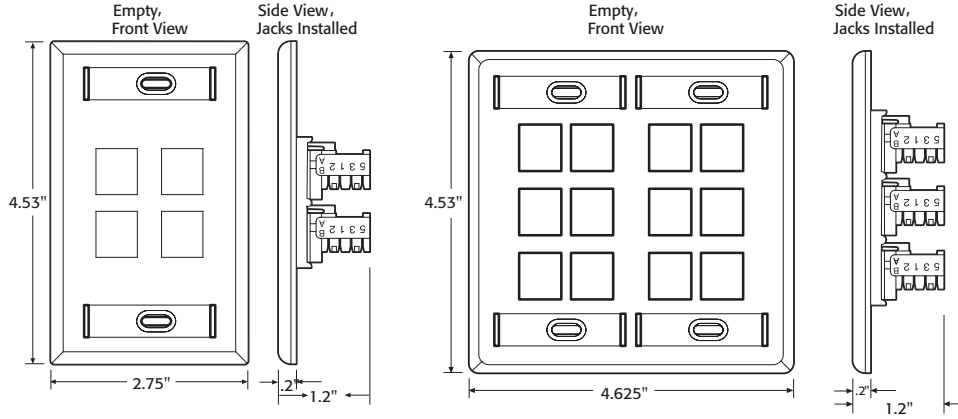

## PART NUMBERS

QuickPort™ Single-Gang Wallplates With Designation ID Windows					
Description	No. of ID Windows	Ivory	White	Grey	Black
6-port wallplate 2	42080-6IS	42080-6WS	42080-6GS	42080-6ES	
4-port wallplate	2	42080-4IS	42080-4WS	42080-4GS	42080-4ES
3-port wallplate	2	42080-3IS	42080-3WS	42080-3GS	42080-3ES
2-port wallplate	2	42080-2IS	42080-2WS	42080-2GS	42080-2ES
1-port wallplate	1	42080-1IS	42080-1WS	42080-1GS	42080-1ES

## PART NUMBERS

QuickPort™ Dual-Gang Wallplates With Designation ID Windows					
Description	No. of ID Windows	Ivory	White	Grey	Black
12-port wallplate	4	42080-12I	42080-12WS	42080-12GS	42080-12ES
8-port wallplate	4	42080-8IP	42080-8WS	42080-8GS	42080-8ES
6-port wallplate	4	42080-6IP	42080-6WS	42080-6GS	42080-6ES
4-port wallplate	4	42080-4IP	42080-4WS	42080-4GS	42080-4ES
3-port wallplate	2	42080-3IP	42080-3WS	42080-3GS	42080-3ES
2-port wallplate	2	42080-2IP	42080-2IP	42080-2IP	42080-2IP
1-port wallplate	2	42080-1IP	42080-1IP	42080-1IP	42080-1IP

Note: Housings are sold empty. Snap-in connectors must be ordered separately.



For Technical Support Call 1-425-485-4288; in USA call 1-800-824-3005.  
 Spec sheets and updates are also available at [www.levitonvoicedata.com](http://www.levitonvoicedata.com).



2222 - 222nd St. SE • Bothell, WA 98021 USA • Tel: 1-800-722-2082 / 1-425-485-4288 • Fax: 1-425-483-5270 • Int'l Fax: 1-425-485-9170 • GSA Schedule Available