






MILBANK
ENERGY AT WORK

NU8980-O-200-KK-LP



Catalog Number	NU8980-O-200-KK-LP	Insulation	Glass Polyester
Marketing Product Description	4 Terminal Ringless Plain Top Horn Bypass 1-200 Ampere Main Breaker Single Pedestal Direct Bury Low Profile	Mounting	Pedestal
UPC	784572215085	Enclosure	G90 Galvanized Steel with Powder Coat Finish
Length (IN)	6	Jaw Quantity	4 Terminal
Width (IN)	9	Bypass Type	Horn Bypass
Height (IN)	70	Number of Meter Positions	1 Position
Brand Name	Milbank	Equipment Ground	2 Barrel Ground Lug
Type	Ringless Meter Socket	Hub Opening	Plain Top
Application	Meter Socket With Main And Load Center	Line Side Wire Range	6 AWG - 350 kcmil
Standard	UL Listed;Type 3R	Number Of Receptacles	0
Voltage Rating	Up to 240 Volts Alternating Current		
Amperage Rating	200 Continuous Ampere		
Phase	1 Phase		
Frequency Rating	60 Hertz		
Size	6L x 9W x 70H		
Number Of Cutouts	1		
Cutout Size	One 200 Ampere Main Breaker		
Cable Entry	Underground		
Terminal	Single Mechanical		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

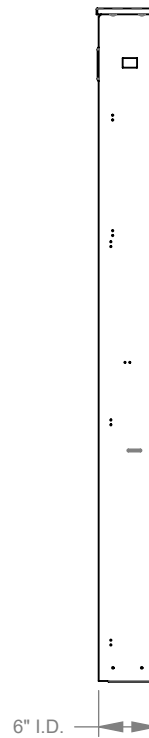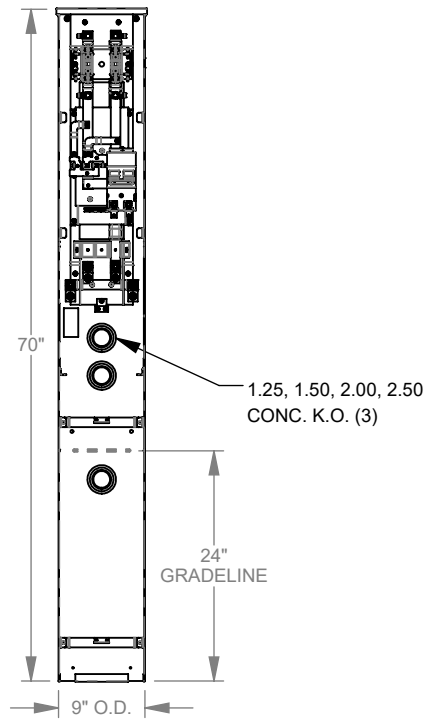

MILBANK
ENERGY AT WORK

Version:

1

**All dimensions are +/- 1/16".
Drawing views are not to scale.**

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.