


SAFETY, FACILITY & EQUIPMENT
IDENTIFICATION

BradyID.com/s35

Your experts
for safety,
facility and
equipment
identification.


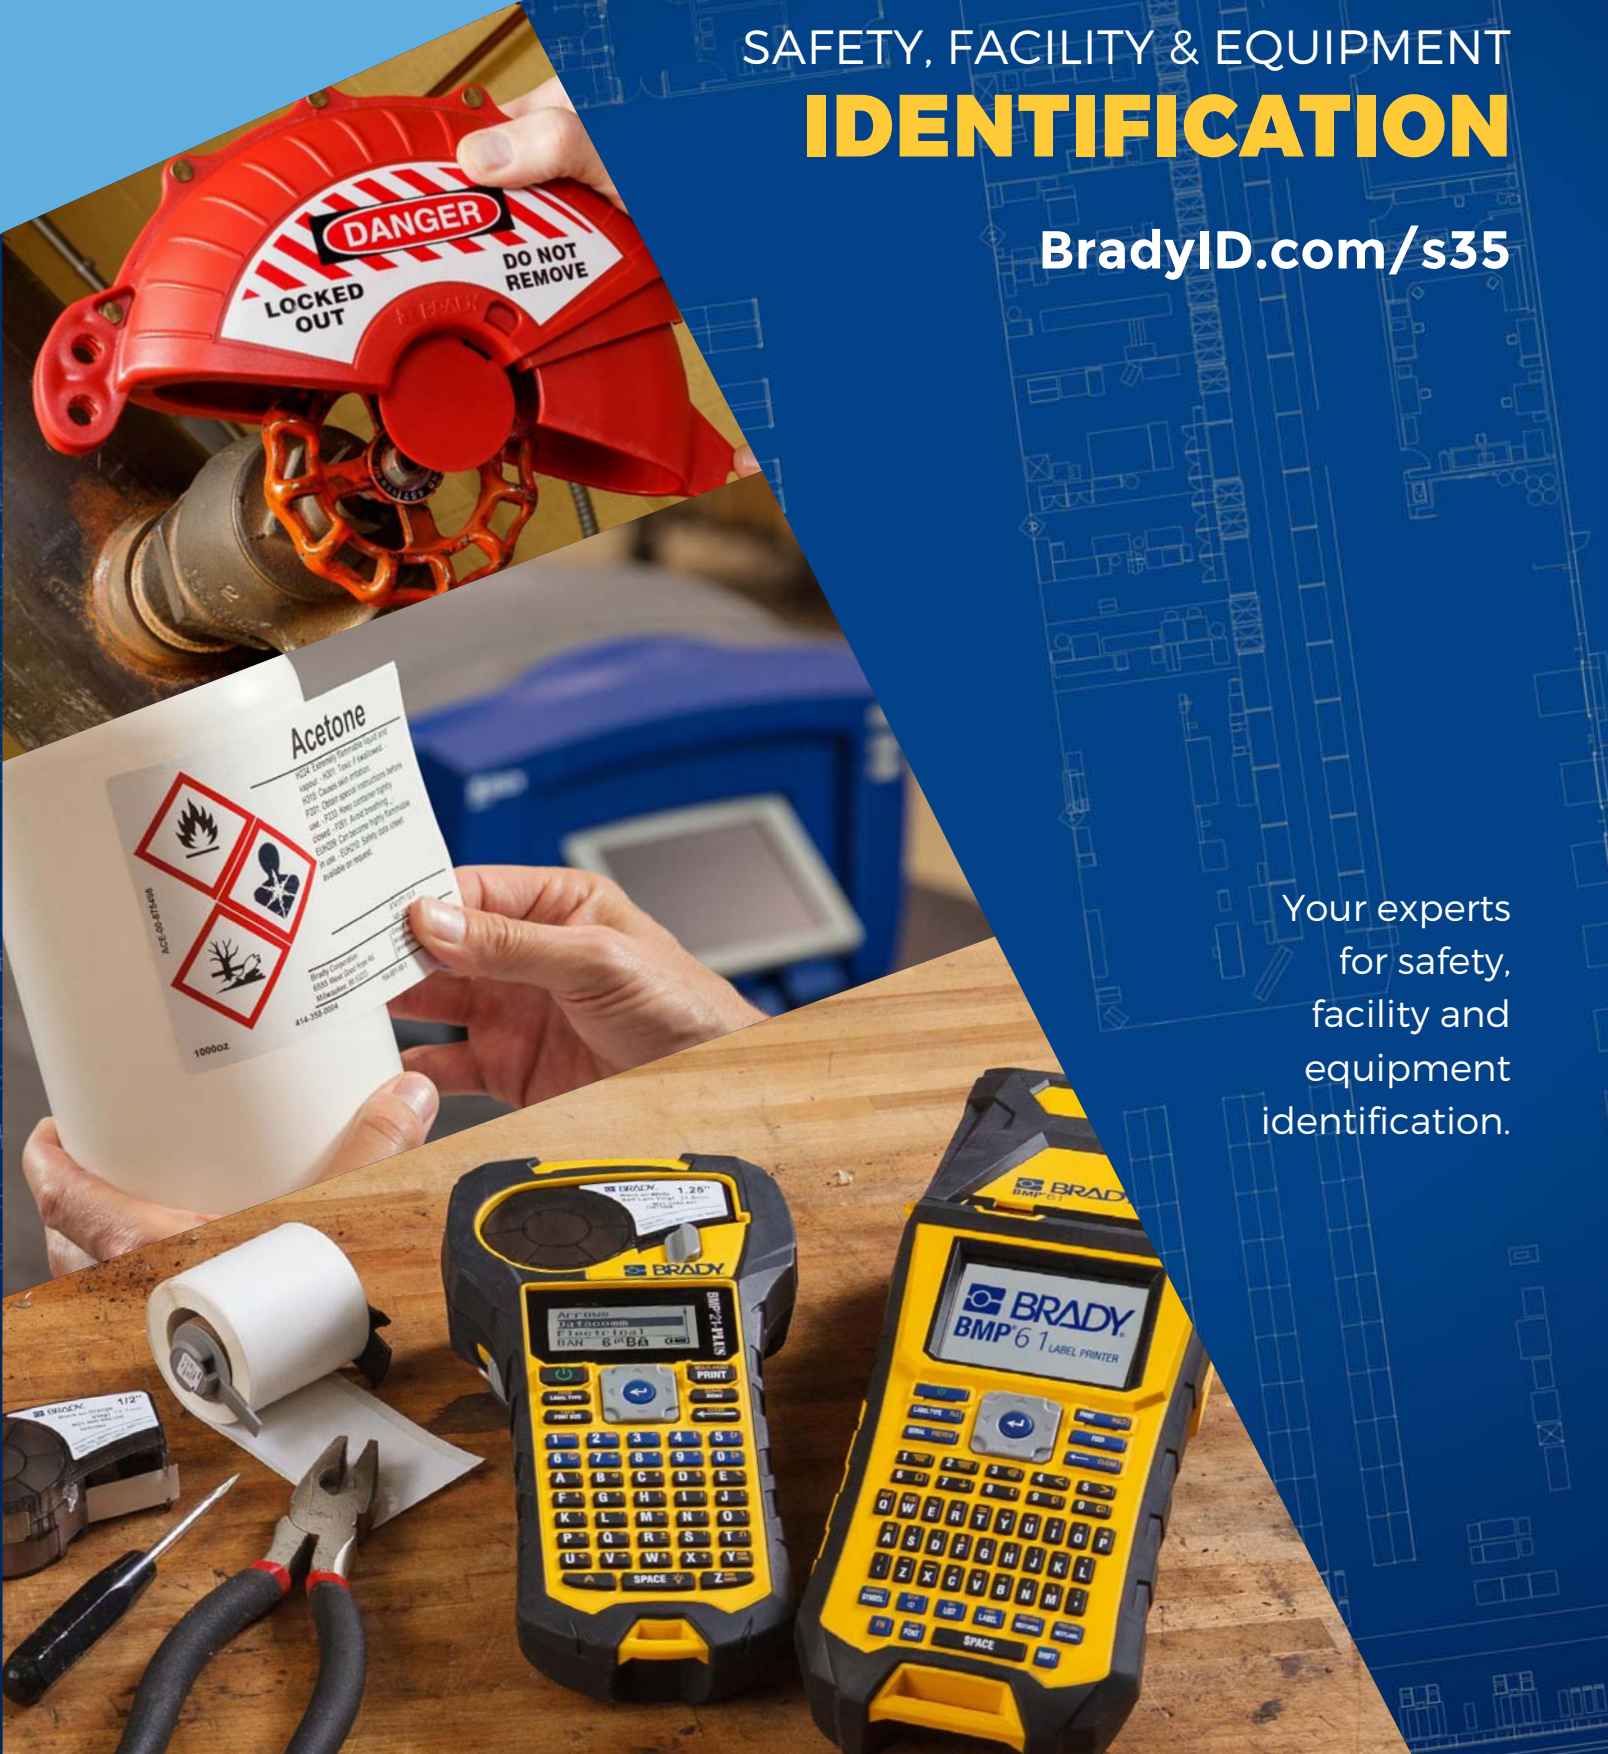


Raised Profile Labels - Engraved Plate Substitutes - Push Button Style (B-593)

Costs up to 80% less than engraved legend plates

- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70mm thick)
- High performance, low cost substitute to engraved plates
- 10-year outdoor durability rating
- On-demand labeling: labels print out in less than 4 seconds
- 5 push button sizes (including keyed and non-keyed 22.5mm, and 30.5mm hole diameter keyed)

Service Temp: -4°F to 212°F Application Temp: 50°F to 212°F
Average Outdoor Durability: Up to 10 years
Agency Approvals:



| Fits Printer Model(s) | Diagram | Catalog # | B# | Color | Label Height A Inch (mm) | Label Width B Inch (mm) | Hole Diameter C Inch (mm) | Vert. Repeat D Inch (mm) | Web Width E Inch (mm) | Labels Per Row | Labels Per Roll | Rec. Ribbon |
|-----------------------|----------|-------------------|-------|--------|--------------------------|-------------------------|---------------------------|--------------------------|-----------------------|----------------|-----------------|--------------|
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-167-593-WT | B-593 | White | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18b | B30EP-167U-593-WT | B-593 | White | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-169-593-WT | B-593 | White | 1.800 (45.7) | 1.800 (45.7) | 1.200 (30.5) | 2.000 (50.8) | 2.500 (63.5) | 1 | 190 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-168-593-WT | B-593 | White | 1.900 (48.3) | 1.200 (30.5) | 0.885 (22.5) | 2.125 (54.0) | 2.500 (63.5) | 1 | 180 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-170-593-WT | B-593 | White | 2.400 (60.9) | 2.400 (60.9) | 1.200 (30.5) | 2.625 (66.7) | 3.250 (82.6) | 1 | 145 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-167-593-YL | B-593 | Yellow | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18b | B30EP-167U-593-YL | B-593 | Yellow | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-169-593-YL | B-593 | Yellow | 1.800 (45.7) | 1.800 (45.7) | 1.200 (30.5) | 2.000 (50.8) | 2.500 (63.5) | 1 | 190 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-168-593-YL | B-593 | Yellow | 1.900 (48.3) | 1.200 (30.5) | 0.885 (22.5) | 2.125 (54.0) | 2.500 (63.5) | 1 | 180 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-170-593-YL | B-593 | Yellow | 2.400 (60.9) | 2.400 (60.9) | 1.200 (30.5) | 2.625 (66.7) | 3.250 (82.6) | 1 | 145 | B30-R6000 |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-167-593-BK | B-593 | Black | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18b | B30EP-167U-593-BK | B-593 | Black | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-169-593-BK | B-593 | Black | 1.800 (45.7) | 1.800 (45.7) | 1.200 (30.5) | 2.000 (50.8) | 2.500 (63.5) | 1 | 190 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-168-593-BK | B-593 | Black | 1.900 (48.3) | 1.200 (30.5) | 0.885 (22.5) | 2.125 (54.0) | 2.500 (63.5) | 1 | 180 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-170-593-BK | B-593 | Black | 2.400 (60.9) | 2.400 (60.9) | 1.200 (30.5) | 2.625 (66.7) | 3.250 (82.6) | 1 | 145 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-167-593-GN | B-593 | Green | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18b | B30EP-167U-593-GN | B-593 | Green | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-169-593-GN | B-593 | Green | 1.800 (45.7) | 1.800 (45.7) | 1.200 (30.5) | 2.000 (50.8) | 2.500 (63.5) | 1 | 190 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-168-593-GN | B-593 | Green | 1.900 (48.3) | 1.200 (30.5) | 0.885 (22.5) | 2.125 (54.0) | 2.500 (63.5) | 1 | 180 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-170-593-GN | B-593 | Green | 2.400 (60.9) | 2.400 (60.9) | 1.200 (30.5) | 2.625 (66.7) | 3.250 (82.6) | 1 | 145 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-167-593-RD | B-593 | Red | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18b | B30EP-167U-593-RD | B-593 | Red | 1.500 (38.1) | 1.200 (30.5) | 0.885 (22.5) | 1.750 (44.5) | 2.500 (63.5) | 1 | 200 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-169-593-RD | B-593 | Red | 1.800 (45.7) | 1.800 (45.7) | 1.200 (30.5) | 2.000 (50.8) | 2.500 (63.5) | 1 | 190 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-168-593-RD | B-593 | Red | 1.900 (48.3) | 1.200 (30.5) | 0.885 (22.5) | 2.125 (54.0) | 2.500 (63.5) | 1 | 180 | B30-R4400-WT |
| BBP30, 31, 33, 35, 37 | Fig. 18a | B30EP-170-593-RD | B-593 | Red | 2.400 (60.9) | 2.400 (60.9) | 1.200 (30.5) | 2.625 (66.7) | 3.250 (82.6) | 1 | 145 | B30-R4400-WT |

U.S. Patent Nos. US8475914B2; US9005729B2.