

## Sealing Fittings

Catalog Number: PREYS11  
UPC: 784011206575



### Description

#### 1/2 Inch EYS F/F Sealing Fitting (V/H)

PVC coated Sealing Fittings are used in conduit runs to stop gasses, vapors or flames from migrating from one part of the conduit system to another, thus limiting the spread of any potential explosion and enhancing safety. The PVC and urethane coatings of the fittings protects them from corrosive atmospheres so they can continue to function in hazardous locations.



### Application

- Stop gasses, vapors or flames from migrating from one part of the conduit system to another, thus limiting the spread of any potential explosion and enhancing safety

### Features


- 40 mil gray PVC exterior coating
- 2 mil red urethane interior coating
- 10 trade sizes from 1/2" through 4"
- Sealing sleeves on all conduit openings

### General

|                      |   |
|----------------------|---|
| Material:            | FERROUS METAL                                 |
| Exterior Finish:     | A nominal .040 inch (40 mil) gray PVC coating |
| Interior Finish:     | A nominal .002 inch (2 mil) red urethane      |
| Sealing Sleeves:     | All conduit openings                          |
| Sealing Orientation: | Vertical or Horizontal                        |
| Hub Type:            | Female  |
| Drain:               | Continuous, automatic drainage of condensate  |

### Dimensions

|                         |      |
|-------------------------|------|
| Dimension A (Inches)    | 3.69 |
| Dimension B (Inches)    | 1.33 |
| Turning Radius          | 1.16 |
| Nominal Weight (Pounds) | 1.3  |

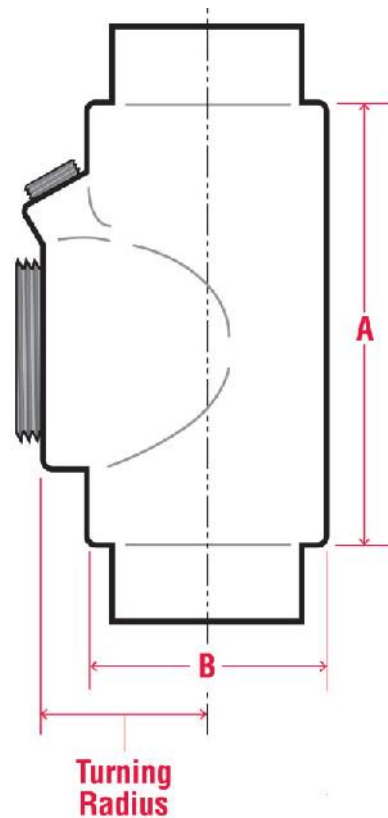

### Technical / Specification Documents

|                                   |                      |
|-----------------------------------|----------------------|
| Specification Guide (1995 Master) | AVAILABLE ON WEBSITE |
| Specification Guide (2004 Master) | AVAILABLE ON WEBSITE |
| Installer Certification and Tools | AVAILABLE ON WEBSITE |
| Chemical Resistance Charts        | AVAILABLE ON WEBSITE |
| Performance Specifications        | AVAILABLE ON WEBSITE |

## Standards

---

|               |  |
|---------------|--|
| NEC/CEC:<br>D | Class I, Division 1 & 2, Groups A, B, C, |
| NEC/CEC:      | Class II, Division 1, Groups E, F, G     |
| NEC/CEC:      | Class II, Division 2, Groups F, G        |
| NEC/CEC:      | Class III                                |

---

## Notes

---

These sealing fittings should be used with a suitable system of sealing compound, such as Chico A, Chico X or Chico A-P from Crouse-Hinds. Follow the installation instructions included with the sealing compound.

---