


Applications

- Boxes are installed in walls or ceilings for lighting fixtures, switches or receptacles
- Square boxes are used where multiple conductor runs are split into two or more directions to bring power to a number of electrical devices

Product Features

- Reference Box Selection section in the front of this catalog for complete description of bracket types and features
- BOX-LOC® (MS) Bracket Box is a snap to install. Place the bracket on the open side of the stud first. Slots in the bracket engage the lip of the stud and actually crimp it as you press the bracket on the stud. Barbed hooks dig into the flat side of the stud, quickly locking it in place
- Combination screw heads provide for faster installation
- TKO® knockouts offer greater flexibility with RACO® patented combination 1/2" and 3/4" knockout
- UBS Support - Welded to box, preset bend points to work with wall thickness 2-1/2" to 6"
- Red boxes, covers and extensions for dedicated life safety alarm circuits

4" SQUARE BOXES


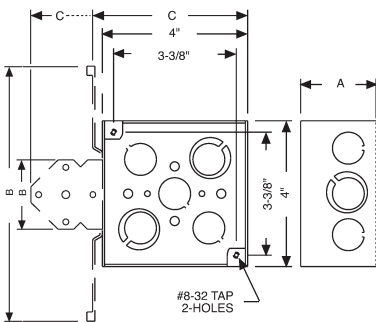


Compliances

- **UL** – File E195978

All RACO® single gang, two gang, 4" square, and single gang gangable U.L. listed steel boxes are acceptable for use in 2-hour fire rated walls. For additional information, consult U.L. "Fire Resistance Directory" or the U.L. website at www.ul.com

600V Per U.L. 514-A, suitable for use without a bonding jumper in circuits up to 600 volts

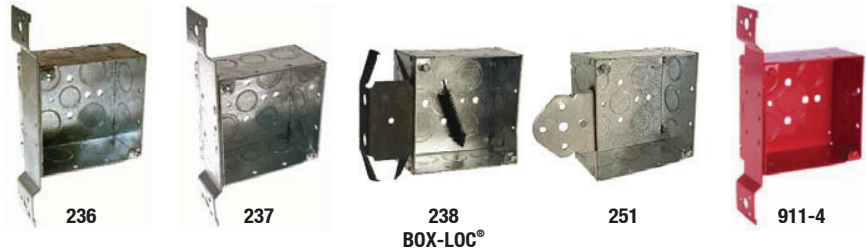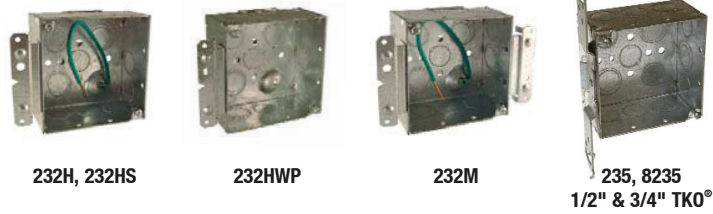

ORDERING INFORMATION - DIMENSIONS

4" SQUARE – 2-1/8" DEEP – WELDED WITH CONDUIT KO'S – 30.3 CUBIC INCHES

CATALOG NUMBER	DESCRIPTION BRACKET & SETBACK	KNOCKOUTS		STD. PKG.	UBS SUP-PORT	RSD. GRND. PRVSN.	PIG-TAIL	UPC BAR CODE
		SIDES COND.	BOTTOM COND.					
232H	HM Brkt	8-1/2", 4-TKO®	2-1/2", 2-TKO®	25	Yes	Yes	Yes	—
232HS*	HM Brkt	8-1/2", 4-TKO®	2-1/2", 2-TKO®	25	Yes	Yes	Yes	—
232HWP	HM Brkt	8-1/2", 4-TKO®	2-1/2", 2-TKO®	25	Yes	Yes	No	—
600V 232M	HM Brkt	8-1/2", 4-TKO®	2-1/2", 2-TKO®	25	Yes	Yes	Yes	—
600V 235	TS, flush	6-1/2", 3-TKO®	3-1/2", 2-TKO®	25	—	—	No	—
8235	TS, flush	6-1/2", 3-TKO®	3-1/2", 2-TKO®	25	—	—	No	
600V 236	FM, flush	6-3/4"	1-1/2", 4-3/4"	25	—	—	No	
600V 237	FM, flush	6-1/2", 3-TKO®	3-1/2", 2-TKO®	25	—	—	No	
238	BOX-LOC® (MS) flush	6-1/2", 3-TKO®	3-1/2", 2-TKO®	25	Plastic	—	No	
251	B Brkt	6-1/2", 3-TKO®	3-1/2", 2-TKO®	25	—	—	No	—
911-4	FM, flush	6-1/2", 3-TKO®	3-1/2", 2-TKO®	25	—	—	No	—

*Box has stranded pigtail assembled

DIMENSIONS

CATALOG NUMBER	A (INSIDE)	B	C
232H, 232HS	2-1/8"	3-1/4"	4-5/16"
232HWP	2-1/8"	3-1/4"	4-5/16"
232M	2-1/8"	3-1/4"	4-5/16"
235, 8235	2-1/8"	7"	4-5/16"
236	2-1/8"	7-5/8"	4-3/8"
237	2-1/8"	7-5/8"	4-3/8"
238	2-1/8"	4-5/8"	5-1/2"
251	2-1/8"	1-31/32"	6"
911-4	2-1/8"	7-5/8"	4-3/8"



4714, THE INSIDER® will secure nonmetallic sheathed cable in 1/2" KO (See pg. B87)