

# Wireless Gateway and Repeater for North America


SE-WFGW-B-S1-NA  
SE-WFRPT-B-S1-NA



# COMMUNICATION

## Simple Wireless Connectivity

- Wirelessly connects SetApp-enabled SolarEdge inverters to an Internet router
- Easy installation and configuration via SetApp, leveraging a Wireless station built into the inverter
- Antenna is located external to the inverter and supports up to two repeaters for extended range
- The Wireless Gateway supports up to eight SolarEdge inverters on a single wireless network

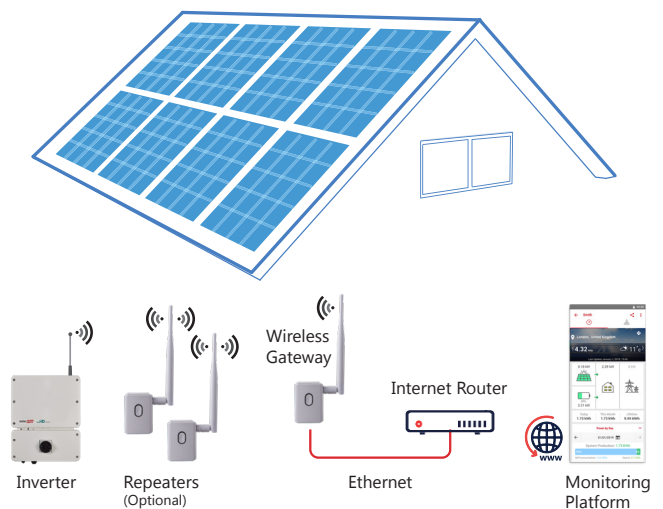

# / Wireless Gateway and Repeater

## for North America

Model: WiFi-GW

SE-WFGW-B-S1-NA, SE-WFRPT-B-S1-NA

COMPATIBLE INVERTERS	SEXXXX-XXXXXBXX4 (INVERTERS WITH SETAPP CONFIGURATION)	UNITS
<b>RF PERFORMANCE</b>		
Transmit Power (Max)	19.5	dBm
Receiver Sensitivity (802.11b @ 1Mbps DSS)	-94 to -69	dBm
EIRP with Antenna	24.5	dBm
Outdoor (LOS) Range	400 / 1300	m / ft
Indoor Range <sup>(1)</sup>	50 / 160	m / ft
Frequency Band	2412 - 2462	MHz
Bandwidth	20	MHz
Antenna Gain <sup>(2)</sup>	5	dBi
<b>NETWORK AND SECURITY</b>		
Channels	1-11	
Security	WPA-PSK, WPA2-PSK, WEP	
<b>WIRELESS LAN</b>		
Standards	802.11b/g/n	
Modulation	802.11b - DSSS-CCK, 802.11g - OFDM, 802.11n - HT modulations, MCS0-7	
Data Rates	1 - 72	Mbps
<b>ENVIRONMENTAL</b>		
Operating Temperature	-20 to +60 / -4 to +140	°C / °F
Storage Temperature	-20 to +60 / -4 to +140	°C / °F
Relative Humidity (non-condensing)	0 - 80	%
Ingress Protection	IP20	
<b>MECHANICAL</b>		
Dimensions (HxWxD; with pins)	66.3 x 48 x 63 / 2.6 x 1.8 x 2.5	mm / inch
Weight without Antenna	90 / 0.20	gr / lb
Weight with Antenna	110 / 0.24	gr / lb
<b>POWER SUPPLY</b>		
AC Voltage (nominal)	100-240	Vac
AC Frequency (nominal)	50/60	Hz
Max Input Current	50	mA
<b>STANDARD COMPLIANCE</b>		
Safety	UL62368-1:2014 Ed.2; CSA-C22.2 No. 62368-1:2014 Ed.2	
EMC	CFR 47 FCC Part 15, Subpart B; Canada ICES-003, Issue 6; ANSI C63.10:2013	
AC Plug	NEMA 1-15P (two-pole, no ground)	

(1) Approximate values, may differ depending on specific installation conditions

(2) The antenna may have higher gain within EIRP power constraint

# / Wireless Gateway and Repeater


## for North America

Model: WiFi-GW

SE-WFGW-B-S1-NA, SE-WFRPT-B-S1-NA


### Scenario A: Single inverter, wireless connection with optional repeaters

- 1 x Wireless gateway
- 1 or 2 x Wireless repeater for extending the Wi-Fi range

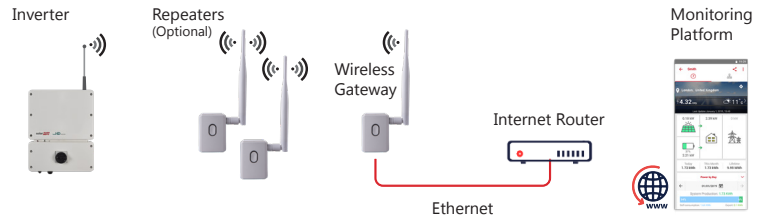


### Scenario B: Multiple inverters, wired connection<sup>(3)</sup>

- 1 x Wireless gateway

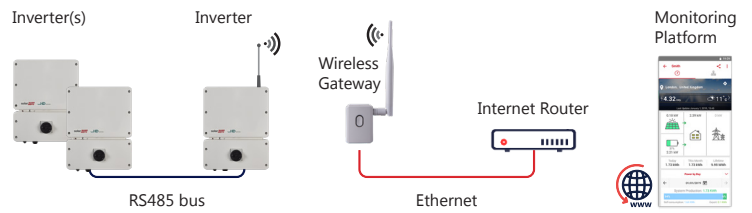

### Scenario C: Multiple inverters, Wi-Fi Point to Multi-point<sup>(3)</sup>

- 1 x Wireless gateway

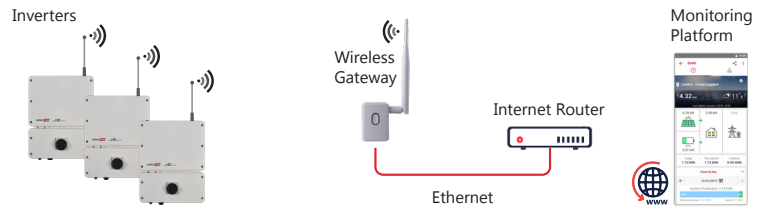

(3) To extend the Wi-Fi range, add one or two Wireless repeaters