

# Buffer Tube Fan-Out Kits, indoor

6 F, 25-in legs

CORNING

Corning indoor buffer tube fan-out kits are specifically designed for the termination of 6- and 12-fiber buffer tubes. These buffer tube fan-out kits provide the ultimate solution for those users who want to field-install connectors on 250  $\mu\text{m}$  coated fibers. The kits provide the most compact, easy-to-install fan-out solution requiring no additional hardware or space than that required for terminating tight-buffered cables. Indoor kits feature a 900  $\mu\text{m}$  fan-out assembly that is color coded to match the fiber color scheme. The fan-out assembly is available with 6- or 12-fiber units in lengths of 0.6 m (25 in) or 1.2 m (47 in). These different lengths provide the installer the flexibility needed for a variety of hardware options.

## Features and Benefits

### Snap-together furcation


Eliminates epoxy for indoor kits

### Fiber routing capabilities

Better fiber management

### Compensation for wide temperature fluctuation

Outdoor use

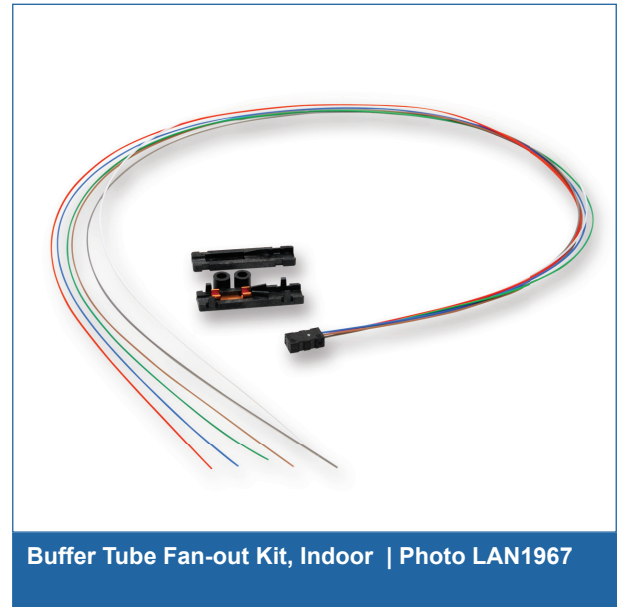

Buffer Tube Fan-out Kit, Indoor | Photo LAN1967

## Specifications

General Specifications	
Environment	Indoor
Fanout Type	Buffer Tube
Product Type	Fan-Out Kits

Temperature Range	
Operation	0 °C to 70 °C (32 °F to 158 °F)

Design	
Cable Type	Cable with 250 $\mu\text{m}$ fiber
Fiber Count	6
Fan-Out Tubing Color	Blue, Orange, Green, Brown, Slate, White

CORNING

# Buffer Tube Fan-Out Kits, indoor

6 F, 25-in legs



## Mechanical Specifications - Fan-Out Kit

Furcation Length	44.5 mm (1.75 in)
Tubing Length	635 mm (25 in)
Tubing Outer Diameter	0.9 mm

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	-----------------------------------------------------------

## Ordering Information

Part Number	FAN-BT25-06
Product Description	Buffer Tube Fan-Out Kit, indoor, 6 F, 25-in legs
EAN Code	4042673619406

## Shipping Information

Units per Delivery	1/1
Package Contents	Fan-out top, fan-out bottom, insert with fan-out tubing



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

