

Armored/Metal Clad Cable Connectors

For Jacketed Metal Clad Cable

Type PG

Type PG-A

For Jacketed Metal Clad Cable such as Interlocked Armor, corrugated metal sheath, smooth aluminum sheath and similar types.

Use:

Use with jacketed armored cable. To terminate and ground the armor, and to secure and seal cable entrance into a cabinet or terminal box through a standard knockout, slip-hole or D&T entrance.

Features:


- Suitable for wet locations
- Gland type (with grounding sleeve & set-screws)


Materials/Finish:

Type PG are malleable or ductile iron fittings, zinc plated. They are supplied with electro-plated grounding screws and pressure ring. They are available with stainless steel grounding screws and pressure ring. Contact your local representative for price and availability.

Type PG-A are copper free aluminum fittings, supplied with stainless steel grounding screws and pressure ring. All fittings can be supplied with neoprene gasket, locknut and insulating bushing. (Add Suffix "LGB".) Contact your local representative for price and availability.


Third Party Certification:

 UL Listed: E-36853
Suitable for wet locations


 CSA Certified: 15553

Applicable Third Party Standards:

UL Standard: 514B
CSA Standards: C22.2 No.18
Fed. Spec: W-F-406B

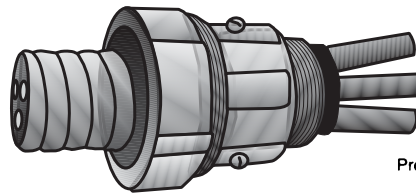

Type PG

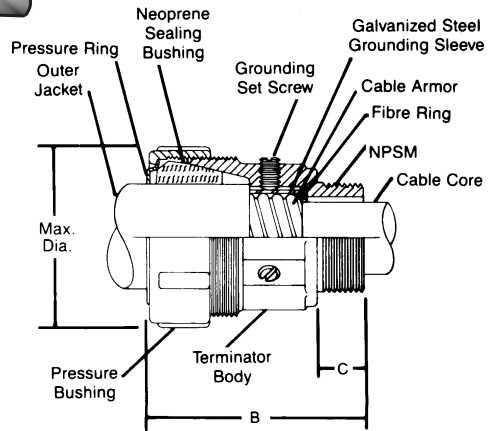

Size (inches)	Malleable Iron Catalog Number	Copper-Free Aluminum Catalog Number	Cable Range		Max Dia.	Dimensions in Inches		
			Min.	Max.		B Approx.	C	Dia. of Cable Core
1/2	PG-57-05	PG-57-05A	.48	.57	1 1/16	2 1/2	9/16	.31
1/2	PG-66-05	PG-66-05A	.57	.66	1 1/16	2 1/2	9/16	.40
1/2	PG-78-05	PG-78-05A	.64	.78	1 1/16	2 1/2	9/16	.51
1/2	PG-89-05	PG-89-05A	.75	.89	1 1/16	2 1/2	9/16	.61
1/2	PG-98-05	PG-98-05A	.85	.98	1 1/16	2 1/2	9/16	.61
3/4	PG-89-07	PG-89-07A	.75	.89	1 15/16	2 5/8	9/16	.61
3/4	PG-98-07	PG-98-07A	.85	.98	1 15/16	2 5/8	9/16	.72
3/4	PG-107-07	PG-107-07A	.88	1.07	1 15/16	2 5/8	9/16	.77
3/4	PG-121-07	PG-121-07A	1.03	1.21	1 15/16	2 5/8	9/16	.85
1	PG-107-10	PG-107-10A	.88	1.07	2 1/16	3 1/16	1 1/16	.75
1	PG-121-10	PG-121-10A	1.03	1.21	2 1/16	3 1/16	1 1/16	.91
1	PG-138-10	PG-138-10A	1.18	1.38	2 5/16	3 1/16	1 1/16	1.04
1 1/4	PG-138-12	PG-138-12A	1.18	1.38	2 13/16	3 3/8	1 1/16	1.04
1 1/4	PG-163-12	PG-163-12A	1.36	1.63	2 13/16	3 3/8	1 1/16	1.24
1 1/4	PG-188-12	PG-188-12A	1.62	1.88	2 13/16	3 3/8	1 1/16	1.42
1 1/2	PG-200-15	PG-200-15A	1.73	2.00	3 1/8	4	3/4	1.61
1 1/2	PG-219-15	PG-219-15A	1.93	2.19	3 1/8	4	3/4	1.61
2	PG-219-20	PG-219-20A	1.93	2.19	3 15/16	4 5/16	25/32	1.79
2	PG-240-20	PG-240-20A	2.10	2.40	3 15/16	4 5/16	25/32	1.96
2	PG-261-20	PG-261-20A	2.35	2.61	3 15/16	4 5/16	25/32	2.09
2	PG-275-20	PG-275-20A	2.50	2.75	3 15/16	4 5/16	25/32	2.09
2 1/2	PG-263-25	PG-263-25A	2.37	2.63	4 5/8	5 1/4	1 3/16	1.99
2 1/2	PG-283-25	PG-283-25A	2.56	2.83	4 5/8	5 1/4	1 3/16	2.43
2 1/2	PG-300-25	PG-300-25A	2.73	3.00	4 5/8	5 1/4	1 3/16	2.43
2 1/2	PG-322-25	PG-322-25A	2.97	3.22	4 5/8	5 1/4	1 3/16	2.49
3	PG-300-30	PG-300-30A	2.73	3.00	5 3/16	5 3/8	1 1/4	2.43
3	PG-322-30	PG-322-30A	2.94	3.22	5 3/16	5 3/8	1 1/4	2.49
3	PG-347-30	PG-347-30A	3.20	3.47	5 3/16	5 3/8	1 1/4	3.05
3	PG-363-30	PG-363-30A	3.37	3.63	5 3/16	5 3/8	1 1/4	3.05
3 1/2	PG-363-35	PG-363-35A	3.37	3.63	5 7/8	5 9/16	1 1/4	3.19
3 1/2	PG-388-35	PG-388-35A	3.59	3.88	5 7/8	5 9/16	1 1/4	3.39
3 1/2	PG-410-35	PG-410-35A	3.82	4.10	5 7/8	5 9/16	1 1/4	3.55
4	PG-410-40	PG-410-40A	3.80	4.10	6 3/8	5 5/8	1 1/16	3.59
4	PG-428-40	PG-428-40A	4.00	4.28	6 3/8	5 5/8	1 5/16	3.79
4	PG-447-40	PG-447-40A	4.20	4.47	6 3/8	5 5/8	1 5/16	3.99
4	PG-465-40	PG-465-40A	4.40	4.65	6 3/8	5 5/8	1 5/16	4.11

TO ORDER SPECIFY:
1 Catalog Number