

# Calbrite™

## Stainless Steel Conduit Systems

### Stainless Steel Hubs

#### Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless threaded conduit
- Use of neoprene O-ring assures weatherproof seal
- Includes a type 316 stainless steel locknut for a secure installation
- No package qty. required



#### Certifications and Compliances:


Calbrite stainless steel Hubs are fabricated to UL514B and ASTM A351 Standards.

#### Applications:

To connect threaded stainless conduit to a threadless opening in a box or enclosure in an outdoor or indoor location. To positively bond conduit to a box or enclosure.

#### Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills
- Along with other corrosive environments

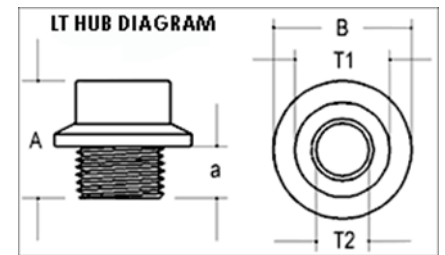

Size	Part Number	A	B	a	T1	T2	Male Thread O.D.	Weight (ea) per lb.
1/2"	S60500LT00	1.580"	1.625"	.625"	1.040"	.770"	.840"	0.19
3/4"	S60700LT00	1.525"	1.875"	.625"	1.280"	.980"	1.050"	0.25
1"	S61000LT00	1.830"	2.125"	.650"	1.600"	1.240"	1.315"	0.45
1-1/4"	S61200LT00	2.050"	2.500"	.850"	1.970"	1.580"	1.660"	0.67
1-1/2"	S61500LT00	2.070"	2.625"	.870"	2.210"	1.820"	1.900"	0.72
2"	S62000LT00	2.100"	3.125"	.800"	2.750"	2.300"	2.375"	1.08
2-1/2"	S62500LT00	2.250"	3.625"	.850"	3.310"	2.730"	2.875"	1.91
3"	S63000LT00	2.880"	4.375"	.930"	3.880"	3.350"	3.500"	2.43
4"	S64000LT00	3.180"	5.500"	1.060"	5.000"	4.340"	4.500"	4.09

All dimensions are for informational purposes only \* Tolerances +/- 5%