



LED Dimmable A-Lamps

15,000 Hour • Omni-Directional

LED	15,000 hours average rated life, 120 volts
------------	--


Applications:

Ideal for applications where uniform multi-directional light output is required.

- + Table Lamps
- + Floor Lamps
- + Sconces
- + Ceiling Fixtures
- + Decorative Fixtures



Features	Benefits
Up to 85% less energy than halogen alternatives	Instant energy savings
Long life	Minimizes replacement and maintenance costs
Very low heat generation	Perfect for sensitive display lighting such as art galleries
Excellent color consistency and CRI	Enhances colors of focal point while maintaining uniformity throughout lighting installation from lamp to lamp
UL approved for damp location	Can be used outdoors when protected from elements — withstands humidity indoors/outdoors
Shatter resistant	Lower the risk of injury and breakage
ANSI construction compliant	Fits all A-lamp installations
9W rated for totally enclosed fixtures	Can be used in totally enclosed luminaires

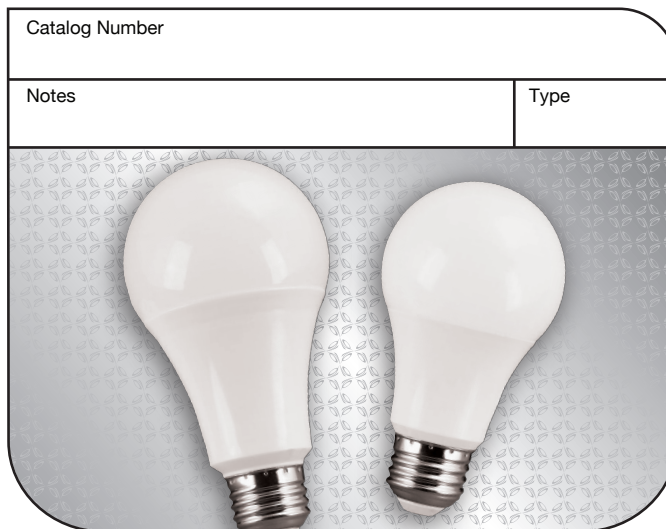

Specifications

Input Line Voltage:	120 VAC
Input Power	See Chart
Input Line Frequency	50/60HZ
Lamp Life (Rated)	15,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
CRI	80



A19 A-Lamp

A21 A-Lamp

Warranty	Item #	Description	Energy Star [®] RATED	Voltage	Wattage	Incandescent/Halogen Wattage Comparison	Lumens	LPW	CCT	CRI	M.O.L. (inches)	Diameter (inches)	Enclosed/Recessed Luminaire	
3 YEAR WARRANTY	LED A19 Lamps													
	LED9A19D27K	LED 9W A19 DIM 2700K	*	120	9	60	800	88.9	2700K	80	4.2	2.4	Y	
	LED9A19D30K	LED 9W A19 DIM 3000K	*	120	9	60	825	91.7	3000K	80	4.2	2.4	Y	
	LED9A19D41K	LED 9W A19 DIM 4000K	*	120	9	60	850	94.4	4000K	80	4.2	2.4	Y	
	LED9A19D50K	LED 9W A19 DIM 5000K	*	120	9	60	850	94.4	5000K	80	4.2	2.4	Y	
	LED A21 Lamps													
	LED15A21D27K	LED 15W A21 DIM 2700K	*	120	15	100	1600	106.7	2700K	80	5.2	2.7	N	
	LED15A21D30K	LED 15W A21 DIM 3000K	*	120	15	100	1625	108.3	3000K	80	5.2	2.7	N	
	LED15A21D41K	LED 15W A21 DIM 4000K	*	120	15	100	1650	110.0	4000K	80	5.2	2.7	N	
	LED15A21D50K	LED 15W A21 DIM 5000K	*	120	15	100	1650	110.0	5000K	80	5.2	2.7	N	

For the most up-to-date specs, please visit www.tcp.com

