

2020 SERIES

1/2" CONDUIT MOUNTING
180° SWIVEL, LEXAN® HOUSING
PHOTOCONTROL



APPLICATIONS



- Flood and patio lamps
- Decorative lighting
- Ideal for applications where it is essential to aim the photocell in an exact direction to sense natural light but avoid artificial light.

FEATURES

OPERATION: Delay up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

HOUSING: All Lexan® enclosures are impact and vandal resistant, cover and base are ultrasonically welded for maximum strength.

ENERGY SAVINGS: Works with screw base CFLs and LED lamps.

ORDERING INFO

CATALOG NO.	UPC CODE	VOLTAGE 50-60Hz
2021	60024	120
2022	60025	208-277
73866	62020	Mounting Bracket

SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy-coated, 1/2" diameter.

CONTACTS: Normally closed (the unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION: Averages under 1 watt.

TEMPERATURE RANGE: -40° to +140°F (-40° to +60°C).

FAIL MODE: ON.


WARRANTY: 5 years.

CONTACT RATINGS


CATALOG NO.	SWITCH	RATING	
		TUNGSTEN	BALLAST
2021	SPST	2000W	1800VA
2022	SPST	3470-4620W	2080-2770VA

WIRING DIAGRAMS

120V MODELS

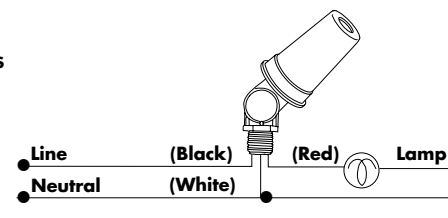

208-277V MODELS

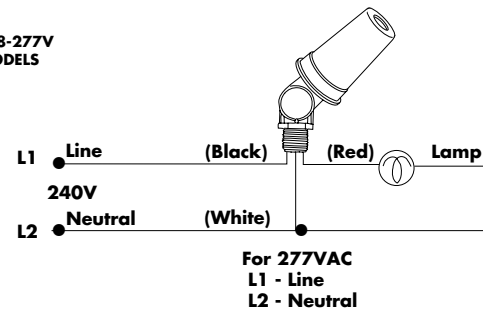

3000 SERIES

FLUSH MOUNTING
LEXAN® HOUSING
PHOTOCONTROL



APPLICATIONS



- Pole lanterns
- Lawn lighting
- Walkways

Flush Mounting Model 3010

FEATURES

OPERATION: Delay up to two minutes to prevent false switching due to light from passing vehicles, lightning, etc.

HOUSING & MOUNTING: Control housing is weather-resistant molded Lexan® with ultrasonically welded seams.

MODEL 3000: Flush mounting through .6875" hole in post lantern or lighting fixture, 3/8" NPT, stem 3/4" long. Gasket and nut supplied.

MODEL 3010: flush mounting into standard, raintight junction box. Includes plate and gasket to fit FS type outdoor junction box.

ENERGY SAVINGS: Works with screw base CFLs and LED lamps.

ORDERING INFO

CATALOG NO.	UPC CODE	VOLTAGE 50-60Hz
3000	60020	120
3002	60019	208-277
3006*	60026	347
3010	60021	120

*CSA certified only.

SPECIFICATIONS

ON/OFF: Turn ON is 1 to 5fc. Turn OFF is 3 to 15fc.

TIME DELAY: ON and OFF.

CELL: Cadmium sulphide, epoxy-coated, 1/2" diameter.

CONTACTS: Normally closed (the unit fails in the ON position).

LEAD WIRES: Three color coded, minimum 6" wire leads, #16AWG, rated for 105°C.

POWER CONSUMPTION: Averages under 1 watt.

TEMPERATURE RANGE: -40° to +140°F (-40° to +60°C).

FAIL MODE: ON.


WARRANTY: 5 years.

CONTACT RATINGS

CATALOG NO.	SWITCH	RATING	
		TUNGSTEN	BALLAST
3000	SPST	2000W	1800VA
3002	SPST	3470-4620W	2080-2770VA
3006*	SPST	1500W	1200VA
3010	SPST	2000W	1800VA

WIRING DIAGRAMS

120V MODEL

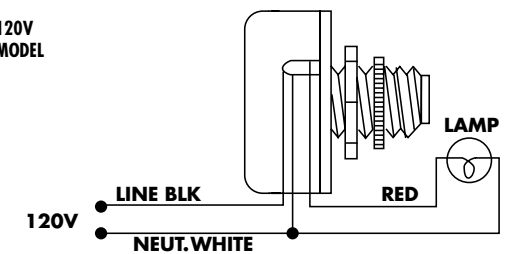

208-277V MODEL

