

# lev-lok® Modular Wiring Devices

Tamper-Resistant Surge Protective Receptacles  
Commercial and Hospital Grades



Steve Maylone for French Associates, Architects.

Leviton's revolutionary modular wiring device family has now been expanded to include Surge Protective Receptacles. Available in both Commercial and Hospital Grades, you can protect sensitive electronic equipment throughout your facility.

- UL 1449 3rd Edition Compliant
- Available in 15A-125V and 20A-125V ratings
- Tamper-Resistant Shutter Mechanism prevents incidental contact with energized contacts
- Indicator light provides visual indication that equipment is being protected
- EMI/RFI noise filtering
- Available audible alarm for hidden locations (can be silenced)
- Wide variety of color options aid in identifying different types of equipment or applications
- Point-of-use maximum surge current protection up to 18,000 Amps per mode



## Ordering Information

Lev-Lok® Surge Protective Receptacles				
Ratings	Color	Commercial/Industrial Grade		Hospital Grade
		■	■	■       ●
15A, 125V	Brown	MT528	MT728*	MT828*
	Ivory	MT528-I	MT728-I	MT828-I
	Gray	MT528-GY	MT728-GY*	MT828-GY*
	White	MT528-W	MT728-W	MT828-W
	Blue	MT528-B	MT728-B	MT828-B
	Black	MT528-E	MT728-E	MT828-E*
	Light Almond	MT528-T	MT728-T	MT828-T
	Red	MT528-R*	MT728-R*	MT828-R
20A, 125V	Brown	MT538	MT738*	MT838*
	Ivory	MT538-I	MT738-I	MT838-I
	Gray	MT538-GY	MT738-GY*	MT838-GY
	White	MT538-W	MT738-W	MT838-W
	Blue	MT538-B	MT738-B	MT838-B
	Black	MT538-E	MT738-E	MT838-E*
	Light Almond	MT538-T*	MT738-T*	MT838-T*
	Red	MT538-R*	MT738-R*	MT838-R

**Key:** ■ Indicator Light    ||||| Audible Alarm    ● Hospital Grade

\* Available upon request; minimum order quantities apply

Wiring Modules*** (All Rated 20A, 125V)	Module Color	Wire Type	Wire Colors	Cat No
Stranded Wire Leads	White	THHN	Black, White, Green	MSTWL-A
Stranded Wire Leads With Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WST
Stranded Wire Leads For Use In Identifying Emergency Power Circuits	Red	THHN	Black, White, Green	MSTWL-R
Solid Wire Leads	White	THHN	Black, White, Green	MSTWL-SDA
Solid Wire Leads With Push Wire Connectors	White	THHN	Black, White, Green	MSTWL-WSD
Stranded Wire Leads For Use In Low Leakage Circuits	White	XHHW-2	Orange, Brown, Green	MSTWL-XA**
Stranded Wire Leads For Use In Low Leakage Circuits	White	XHHW-2	Black, Blue Green	MSTWL-XB**

\*\*add suffix of 0 for 6", 1 for 12", 2 for 24" or 3 for 36" long leads; please allow 4 to 6 weeks for delivery


\*\*\* Lev-Lok Wiring Modules sold separately

## Specifications


Electrical Specifications	
Amperage	15A or 20A
Voltage	125V
Frequency	50/60 Hz
Environmental Specifications	
Flammability	Rated V-2 per UL94
Operating Temperature	-10°C to +60°C
Material Specifications	
Body Material	Polycarbonate
Face Material	Nylon
Strap Material	Zinc-Plated Steel
Line Contacts	Brass Triple-Wipe
Locking Pins	Brass
Ground Clips	Brass-Plated Steel
Tamper Resistant Shutter Mechanism	Delrin® Acetal
Mechanical Specifications	
Lead ID	Wiring Module Leads identified in accordance with UL 498
Product ID	Ratings are permanently marked on device
Performance Data	
Joules Rating	720J
Max Surge Current	L-N: 18kA, L-G: 9kA, N-G: 9kA
Noise Rejection	-30dB at 500kHz-30MHz
Voltage Protection Rating (VPR)	L-N: 600V, L-G: 700V, N-G: 600V
Short Circuit Current Rating	5000A
Diagnostics	Indicator Light, Audible Alarm (on select versions)
Standards and Certifications	
NEMA	WD-6 & WD-1
ANSI	C-73
UL 498	File E13399
UL1449	File E317603
CSA C22.2 No. 42	File E13399
NOM	057
Warranties	
Warranty	10 Year Limited

## Dimensions

Front View

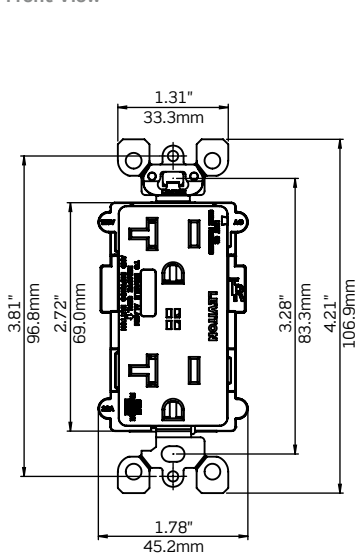

Side View

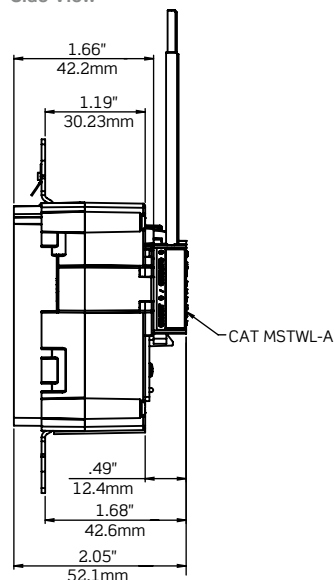

### Leviton Manufacturing Co., Inc.

201 North Service Rd, Melville, NY 11747  
 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538  
 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

### Leviton Manufacturing of Canada, Ltd.

165 Hymus Blvd, Pointe-Claire, QC H9R 1E9  
 Telephone: 1-800-469-7890 • FAX: 1-800-563-1853

### Leviton S. de R.L. de C.V.

Lago Tana 43, Col. Huichapan, Miguel Hidalgo, CP 11290 México DF  
 Tel. (+52) 55-5082-1040 • Fax: (+52) 55-5386-1797  
 www.leviton.com.mx

Visit our Website at: [www.leviton.com/commercial](http://www.leviton.com/commercial)  
 email: [commercial@leviton.com](mailto:commercial@leviton.com)

© 2013 Leviton Manufacturing Co., Inc. All rights reserved.