




# 222 Series 3 or 5 Conductor Compact Connector

Cross section: 28 – 12 AWG  
(stranded and solid)  
Electrical specs: 600 V maximum  
20 A maximum  
Strip length:  9 - 10 mm / 0.37 in  
Maximum operating temperature: 105° C

For all connections requiring...

- Stranded / solid wires
- Wide range of wire sizes
- Combination of different wire sizes and types
- Small space consumption
- Built-in test point
- Protection against electrical shock, touch safe
- Low installed cost and safe operation
- Maintenance-free connection



	Item No.	Pack.-unit pcs	Item No.	Pack.-unit pcs
	 <b>222-413</b>	500 (10 x 50)	 <b>222-415</b>	400 (10 x 40)
<b>Technical Data</b>				
Number of connection points per connector	3		5	
Potentials per connector	1		1	
Connection type	CAGE CLAMP® Spring pressure connection technology		CAGE CLAMP® Spring pressure connection technology	
Height	14.5 mm / 0.571 in		14.5 mm / 0.571 in	
Width	17 mm / 0.669 in		26.6 mm / 1.047 in	
Depth	20.5 mm / 0.807 in		20.5 mm / 0.807 in	
Color	Gray (w/orange levers)		Gray (w/orange levers)	
<b>Accessories</b>				
Wire cutting and stripping tool (22-10 AWG)	<b>Item No.</b> <b>206-130</b>	<b>Pack.-unit pcs</b> 500 (10 x 50)		

## Easy as 1, 2, 3...



1) Strip wire




2) Push up lever



3) Insert conductor and push down lever

51011212\_0888-0832/0000-0042 Printed in the United States  
rev2 09/05

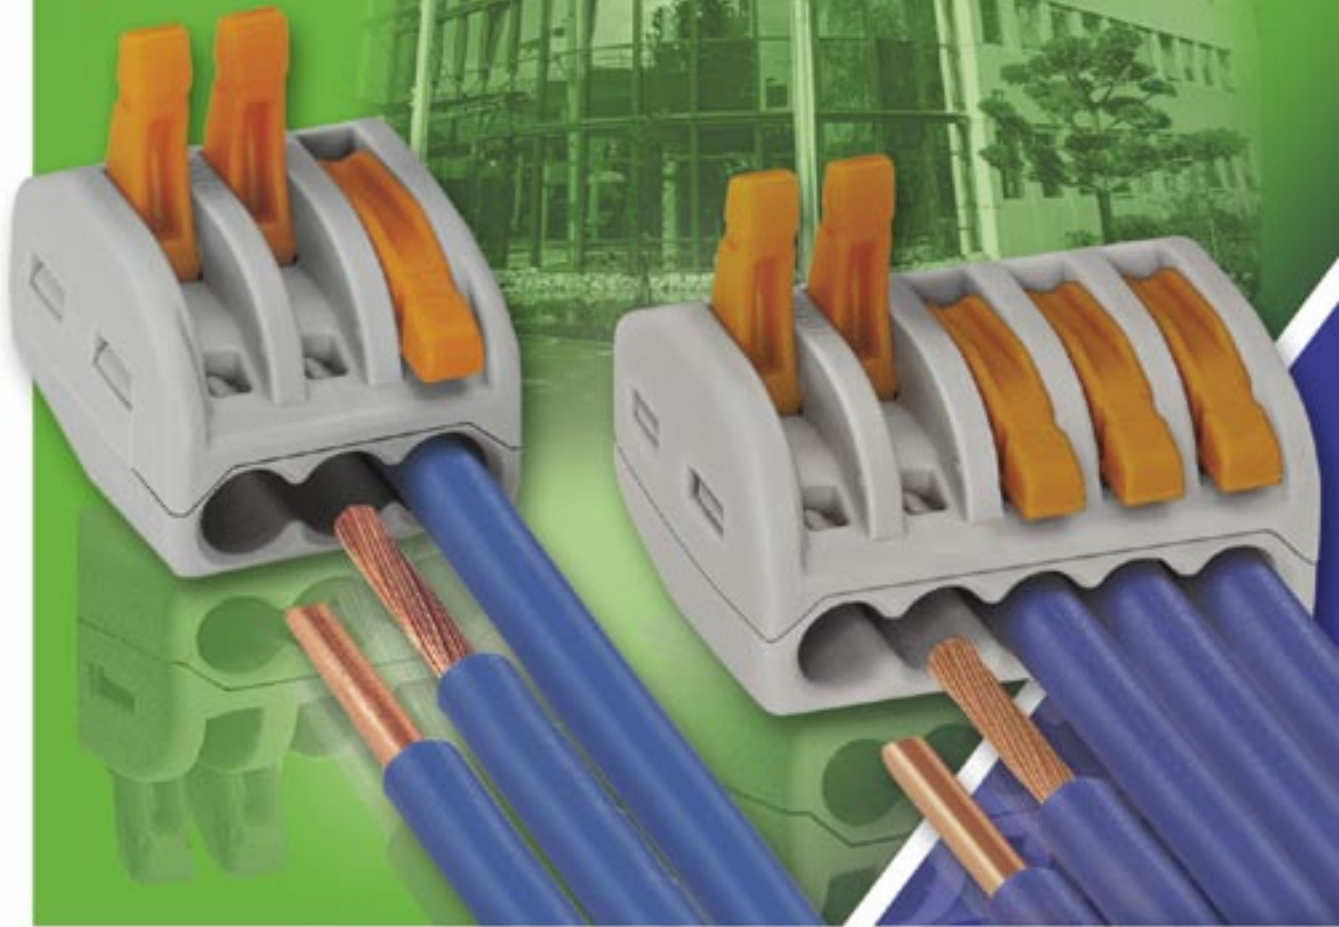

# LEVER-NUTS™

• 222 Series: 3 or 5 Conductor Compact Connectors