


3MP Indoor/Outdoor Bullet IP Camera

O3VLB3 2.8mm fixed lens, dark grey housing

Features

- Supports 3MP @ 20fps and 1080p @ 30fps
- Built-in standard PoE (IEEE 802.3af)
- True Day/Night operation (IR cut filter)
- IR Range: 98' (depending on scene reflection)
- Supports H.264 and MJPEG codecs
- IP67 compliant
- Conformant with ONVIF profile S
- 2 year warranty

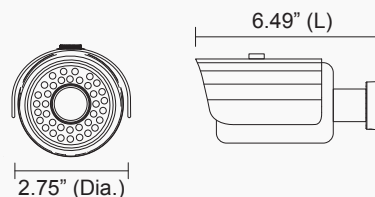

Camera Specifications

| | |
|----------------------------|----------------------------------|
| Image Sensor | Progressive scan 1/3" CMOS, 3MP |
| Maximum Resolution | 2304x1296 |
| Minimum Illumination..... | F2.0, Color: 0.37 lux, BW: 0 lux |
| White Balance | Auto, Manual |
| Exposure Control..... | Yes |
| Digital Slow Shutter | Yes |
| Backlight | BLC/HLC/D-WDR |
| Day/Night..... | IR cut filter |
| DNR..... | 3D |

Video Specifications

| | |
|-------------------------|---|
| Main Resolution..... | 2304x1296 @ 20fps, 1920x1080 / 1280x720 @ 30fps |
| Compression | H.264 (HP/MB/BP), MJPEG |
| Bitrate Control..... | VBR, CBR |
| Multiple Streaming..... | 2 streams |

External Terminal Specifications

| | |
|---------------|-------------|
| Ethernet..... | 10/100 Mbps |
| Power | DC jack |

Network Specifications

| | |
|--------------------|--|
| Protocols..... | IPv4/IPv6, TCP, UDP, RTP, RTSP, HTTP, HTTPS, SMTP, FTP, DHCP, DNS |
| DDNS support | Speco DDNS (free of charge) |
| Security..... | User ID & Password protection, IP address filtering, digest authentication, user access log, HTTPS |
| User Access..... | 20 users max. Number of simultaneous users may vary depending on resolution |

System Specifications

| | |
|----------------------|--|
| PoE..... | Standard (IEEE 802.3af) |
| Analytics | Motion detection (4 regions), Tamper detection |
| Alarm Triggers | Analytics |
| Alarm Events | Email, record, snapshot |
| Video Buffer..... | Configurable pre-record & post-record |
| Image Settings..... | Privacy mask, corridor mode |


Client Specifications

| | |
|-------------------------|--|
| Web Browser Support ... | Windows (Internet Explorer 8 and up, Chrome, Firefox) |
| PC Application | SecureGuard® |
| Mobile Application..... | SecureGuard® Mobile (iPhone® and Android™) |

Operating & Unit Specifications

| | |
|---------------------------|--|
| Power Supply | PoE, 12VDC (power supply not included) |
| Power Consumption | 4W |
| Operating Temperature .. | -20° F – 140° F |
| Operating Humidity..... | Less than 95% RH |
| Unit Dimensions | 6.49" (L) x 2.75" (Dia.) |
| Unit Weight..... | 13 oz. |
| Certifications..... | FCC, RoHS |
| Included in Package | Unit, CD (manual, software), mounting screws, L wrench |

Optional Accessories



O2VLJBB
Junction Box



POEINJ
12.95W
PoE Injector



PSW5
12VDC
Power Supply

Visit www.specotech.com for latest ONVIF support. ONVIF is a trademark of Onvif, Inc. iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. Android is a trademark of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 6/21/16