

The Com-Pak™ Max

The professional's choice for smaller areas



CADET
SAFETY & QUALITY



Features and Benefits

- Primary and Secondary Thermal Safeguards
 - High temperature manual reset
 - Over temperature one-time thermal device
- Horizontal or vertical grill mounting options
- Durable steel tube and plate constructed heating element
- Powder coat paint process eliminates sharp metal edges
- Wall can designed for ease of installation

General Information:

The Com-Pak™ Max provides all the benefits of our popular Com-Pak™ Plus, but features more durable components and increased versatility. This multi-watt heater is perfect as a single unit for smaller areas such as a bathroom or small bedroom, or as multiple units for larger areas such as a master bedroom, living room or family room. Choose from a vertical grill with the option of a built-in thermostat, or a horizontal, register style grill without a built-in thermostat, to suit your project needs. Cadet recommends a wall-mounted thermostat for optimum performance.

Architectural Information:

Fan forced electric air heaters shall be dual rated from 208V to 240V. The painted wall mounting can for this heater is made from 20-gauge sheet steel with six electrical knockouts and 34 cubic inches for a wiring compartment. Each complete heater shall be of unitized construction and attach to the wall can with a single screw and shall be self-contained and completely separate from the wall mounting can. Element construction is a coiled nichrome heating wire sealed in a steel sheath with steel fins brazed to the sheath. Heating unit shall include a 16-amp rating at 240V, high temperature manual reset limit switch and a 25 amp over temperature thermal backup. A two stage centrifugal blower shall be driven by an impedance protected motor. The motor shall be totally isolated from the heating chamber. Metal grills shall be of one piece, constructed of 22-gauge steel and finished with a powder coat paint system.

Carton Details

Heater Assembly Only Carton

DIMENSIONS	12"W x 7.5"H x 5.25"D
PALLET QTY.	100
CUBE	.27



HEATER ASSEMBLY WITH THERMOSTAT



WALL CAN

PHONE 360.693.2505
 FAX 360.694.8668
 WEB www.cadetco.com



Technical Information:

The wall can and the Com-Pak™ Max heater assembly may be installed vertically or horizontally. The Com-Pak™ Plus grill may be installed vertically or horizontally. The Com-Pak™ Max register style grill may only be installed horizontally. The (vertical installation) Com-Pak™ Max may be ordered with or without a built-in thermostat. For optimal comfort use a Cadet electronic thermostat or a dual diaphragm thermostat. Fan heaters and thermostats work best when installed on an inside wall. UL requires heater to be placed a minimum distance of 6" from adjacent surfaces and 4.5" from the floor. Manufacturer recommends installation 12" from all surfaces. A 3' minimum clearance is recommended for furniture or other objects placed directly in front of heater. Not approved for ceiling mount.

NOTE: Manufacturer recommends installing heater assembly after walls are finished. However, if installation is necessary before walls are finished, use the paint mask provided. Heater must be cleaned every six months minimum. Model CM162 is UL Listed, and models CM202 & CM208 are ETL approved.


Ordering Information:

The heater assembly, Com-Pak™ Plus grill and Com-Pak™ Max register style grill are all separate components and shall be ordered separately. Suffix "T" in model number denotes built-in single pole thermostat. Model numbers without a "T" require a thermostat. Recommended for elevations under 7500 feet. Available in white or almond.

UPC Code	Part#	Model#	Description	WATTS		AMPS		WT./LBS
				240V	208V	240V	208V	
027418	65001	6	CM162 Heater Assembly Only-No Thermostat	700/900/1600	525/675/1200	2.92/3.75/6.67	2.52/3.25/5.77	7
027418	65002	3	CM162T Heater Assembly Only-w/ Thermostat	700/900/1600	525/675/1200	2.92/3.75/6.67	2.52/3.25/5.77	7
027418	65003	0	CM202 Heater Assembly Only-No Thermostat	500/800/1200/1500/2000	375/600/900/1125/1500	2.08/3.33/5.0/6.25/8.33	1.80/2.88/4.33/5.41/7.21	7
027418	65004	7	CM202T Heater Assembly Only-w/ Thermostat	500/800/1200/1500/2000	375/600/900/1125/1500	2.08/3.33/5.0/6.25/8.33	1.80/2.88/4.33/5.41/7.21	7
027418	65008	5	CM208 Heater Assembly Only-No Thermostat		500/800/1200/1500/2000		2.40/3.85/5.77/7.21/9.62	7
027418	65009	2	CM208T Heater Assembly Only-w/ Thermostat		500/800/1200/1500/2000		2.40/3.85/5.77/7.21/9.62	7

UPC Code	Part#	Model#	Description	WT./LBS
027418	67061	8	CC C Wall Can Single Pack	2.5
027418	67060	1	CC10 C Wall Can, 10 Pack	24
027418	67079	3	CGW C Grill w/ Parts, White, Vertical	1.5
027418	67081	6	CGW10 C Grill w/ Parts, White, 10 pack, Vertical	15
027418	67075	5	CGA C Grill w/ Parts, Almond, Vertical	1.5
027418	67080	9	CGA10 C Grill w/ Parts, Almond, 10 pack, Vertical	15
027418	65005	4	CMGW Register Style Grill w/ Parts, White	2.5
027418	65006	1	CMGW5 Register Style Grill w/ Parts, White, 5 pack	22
027418	65015	3	CMGA Register Style Grill w/ Parts, Almond	2.5
027418	65016	0	CMGA5 Register Style Grill w/ Parts, Almond, 5 pack	22
024718	67063	2	CTT1W Single Pole Field Mount Thermostat Kit, White	.25
027418	67064	9	CTT2W Double Pole Field Mount Thermostat Kit, White	.25
027418	67065	6	CTT1A Single Pole Field Mount Thermostat Kit, Almond	.25
027418	67066	3	CTT2A Double Pole Field Mount Thermostat Kit, Almond	.25
027418	67067	0	CTTP Tamper Proof Field Mount SP Thermostat Kit	.25
027418	06390	8	CS4MA 4" Surface Mount Metal Adapter C Series, Almond	2
027418	06395	3	CS4MW 4" Surface Mount Metal Adapter C Series, White	2
027418	67100	4	CAMA 18.5" x 22" Metal Adapter Plate C Series, Almond	1
027418	67105	9	CAMW 18.5" x 22" Metal Adapter Plate C Series, White	1
027418	67110	3	SAMA 12" x 21.25" Metal Adapter Plate, Almond	2
027418	67115	8	SAMW 12" x 21.25" Metal Adapter Plate, White	2

ACCESSORIES

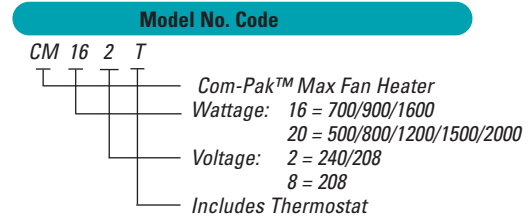

*Views shown below require horizontal mounting, using the register style grill and models without a built-in thermostat. If vertical mounting is preferred, use model CGA or CGW.

