

4" SQUARE COVERS

Applications

- Covers are used to close an outlet box
- Raised device covers are used for mounting switches or receptacles


Product Features

- Angled mounting slots compensate up to 12° for box misalignment
- Swivel covers restricted to 20° swing from vertical
- KWIK-HANG® allows easy installation of high bay lighting fixtures. Fixture rests in position while wiring is completed
- Red boxes, covers and extensions for dedicated life safety alarm circuits

Compliances

- UL – File E195978
- SP – File LR-1082

*5 Bundles of 10

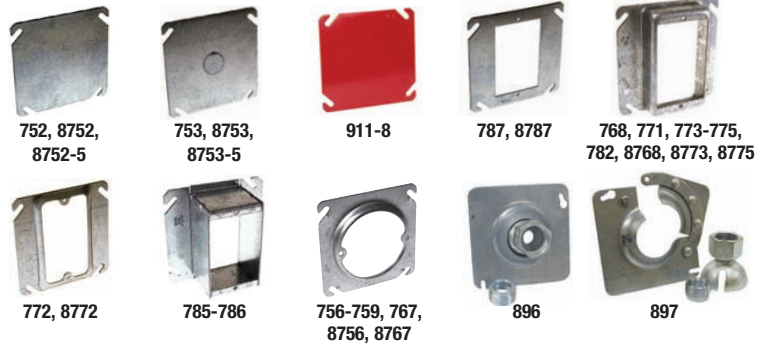

RACO STEEL BOXES & COVERS

ORDERING INFORMATION - DIMENSIONS

4" SQUARE COVERS						
CATALOG NUMBER	DESCRIPTION	CU. IN. CAP.	STD. PKG.	UPC BAR CODE	RECOMMENDED MAX. SUPPORT LOADS	
					CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
752	Flat, blank	—	50	—	No	No
8752	Flat, blank	—	50		No	No
8752-5	Flat, blank	—	50*		No	No
753	Flat, 1/2" KO in center	—	50	—	No	No
8753	Flat, 1/2" KO in center	—	50		No	No
8753-5	Flat, 1/2" KO in center	—	50*		No	No
911-8	Flat, blank, Painted Red	—	50	—	No	No

4" SQUARE DEVICE AND TILE COVERS - SINGLE DEVICE						
CATALOG NUMBER	DESCRIPTION	CU. IN. CAP.	STD. PKG.	UPC BAR CODE	RECOMMENDED MAX. SUPPORT LOADS	
					CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
767	Raised 1/2" open, ears 2-3/4" O.C.	3.0	25	—	No	50
8767	Raised 1/2" open, ears 2-3/4" O.C.	3.0	25		No	50
756	Raised 5/8" open, ears 2-3/4" O.C.	4.0	100	—	No	50
8756	Raised 5/8" open, ears 2-3/4" O.C.	4.0	25		No	50
759	Raised 3/4" open, ears 2-3/4" O.C.	5.0	25		No	50
757	Raised 1" open, ears 2-3/4" O.C.	6.8	25		No	50
758	Raised 1-1/4" open, ears 2-3/4" O.C.	8.5	25	—	No	50
787	Flat	—	50	—	—	—
8787	Flat	—	50		—	—
771	Raised 1/4"	1.5	100	—	—	—
8771	Raised 1/4"	1.5	25		—	—
772	Raised 1/2" drawn	3.5	100	—	—	—
8772	Raised 1/2" drawn	3.5	50		—	—
782	Raised 1/2" tile	3.5	25		—	—
768	Raised 5/8"	4.5	50	—	—	—
8768	Raised 5/8"	4.5	25		—	—
773	Raised 3/4"	5.5	50	—	—	—
8773	Raised 3/4"	5.5	50		—	—
774	Raised 1"	7.5	25		—	—
775	Raised 1-1/4"	9.5	25	—	—	—
8775	Raised 1-1/4"	9.5	25		—	—
785	Raised 1-1/2"	11.3	25	—	—	—
786	Raised 2"	14.5	25		—	—

SWIVEL FIXTURE COVERS						
CATALOG NUMBER	DESCRIPTION	CU. IN. CAP.	STD. PKG.	UPC BAR CODE	RECOMMENDED MAX. SUPPORT LOADS	
					CEILING FAN (DYNAMIC) LBS.	FIXTURE (STATIC) LBS.
896	For 4" sq. boxes, 1/2" or 3/4" pipe	—	25	—	No	50
897	KWIK-HANG® For 4" sq. boxes 1/2" or 3/4" pipe	—	25	—	No	50

