

Screw Connection Terminal Blocks


Space-Saver Feed-Through Blocks

1492-W3

1492-W4

1492-W6

Dimensions are not intended to be used for manufacturing purposes.
Note: Height dimension is measured from top of rail to top of terminal block.

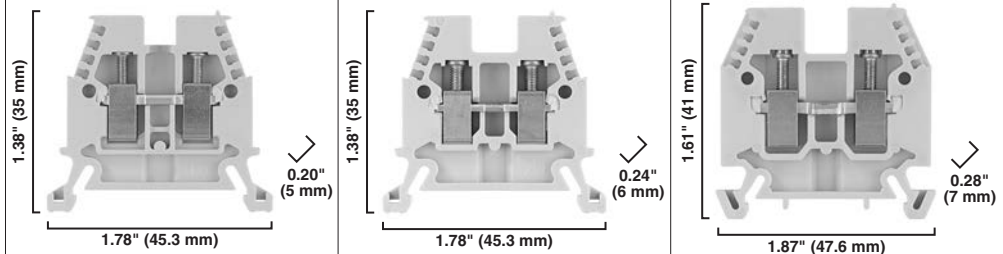

Specifications	Single-circuit terminal block.				Single-circuit terminal block.				Single-circuit terminal block.			
Certifications		IEC	CSA	ATEX		IEC	CSA	ATEX		IEC	CSA	ATEX
Voltage Rating	600V AC/DC	800V AC/DC	600V AC/DC	550V AC/DC	600V AC/DC	800V AC/DC	600V AC/DC	550V AC/DC	600V AC/DC	800V AC/DC	600V AC/DC	550V AC/DC
Maximum Current	20 A	24 A	20 A	24 A	30 A	32 A	30 A	32 A	40 A	41 A	40 A	41 A
Wire Range (Rated Cross Section)	#30...14 AWG	0.5...2.5 mm ²	#22...14 AWG	2.5 mm ²	#22...10 AWG	0.5...4.0 mm ²	#22...10 AWG	4.0 mm ²	#22...10 AWG	0.5...6.0 mm ²	#22...10 AWG	6.0 mm ²
Wire Strip Length	0.39 in. (10 mm)				0.35 in. (9 mm)				0.47 in. (12 mm)			
Recommended Tightening Torque	5.0...5.6 lb•in (0.6 N•m)				5.0...5.6 lb•in (0.6 N•m)				5.6...6.8 lb•in (0.7 N•m)			
Density	61 pcs/ft (200 pcs/m)				50 pcs/ft (166 pcs/m)				43 pcs/ft (142 pcs/m)			
Housing Temperature Range	-40...+195 °F (-40...+90 °C)				-40...+195 °F (-40...+90 °C)				-40...+195 °F (-40...+90 °C)			
Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.				
Color:	Grey	1492-W3	50	1492-W4	50	1492-W6	50					
	Red	1492-W3-RE	50	1492-W4-RE	50	1492-W6-RE	50					
	Blue	1492-W3-B	50	1492-W4-B	50	1492-W6-B	50					
	Black	1492-W3-BL	50	1492-W4-BL	50	1492-W6-BL	50					
	Green	1492-W3-G	50	1492-W4-G	50	1492-W6-G	50					
	Yellow	1492-W3-Y	50	1492-W4-Y	50	1492-W6-Y	50					
	Orange	1492-W3-OR	50	1492-W4-OR	50	1492-W6-OR	50					
	Brown	1492-W3-BR	50	1492-W4-BR	50	1492-W6-BR	50					
	White	1492-W3-W	50	1492-W4-W	50	1492-W6-W	50					
Accessories	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.						
Mounting Rails:												
1 m Symmetrical DIN (Steel)	199-DR1	10	199-DR1	10	199-DR1	10						
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	1492-DR5	10	1492-DR5	10						
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	1492-DR6	2	1492-DR6	2						
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	1492-DR7	2	1492-DR7	2						
End Barrier	1492-EB3	50	1492-EB3	50	1492-EB10	50						
End Anchors and Retainers:												
Screwless End Retainer	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20						
DIN Rail — Normal Duty	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100						
DIN Rail — Heavy Duty	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50						
Jumpers:												
Insulated Side Jumper	1492-SJ5-10 (10-pole)	10	1492-N42 (2-pole) 1492-SJ6-10 (10-pole)	50 10	—	—						
Center Jumper — 50-pole	1492-CJ5-50	5	1492-CJ6-50	5	—	—						
Center Jumper — 40-pole	—	—	—	—	1492-CJ7-40	5						
Center Jumper — 10-pole	1492-CJ5-10	10	1492-CJ6-10	10	1492-CJ7-10	10						
Center Jumper — 5-pole	1492-CJ5-5	10	1492-CJ6-5	10	1492-CJ7-5	10						
Center Jumper — 4-pole	1492-CJ5-4	10	1492-CJ6-4	10	1492-CJ7-4	10						
Center Jumper — 3-pole	1492-CJ5-3	10	1492-CJ6-3	10	1492-CJ7-3	10						
Center Jumper — 2-pole	1492-CJ5-2	10	1492-CJ6-2	10	1492-CJ7-2	10						
Center Jumper Link	1492-CJL5	10	1492-CJL6	10	1492-CJL7	10						
Center Jumper Cover — White*	1492-CJCW5	20	1492-CJCW6	20	1492-CJCW6	20						
Other Accessories:												
Partition Plate	1492-PP3	50	1492-PP3	50	1492-PP10	50						
Separation Plate	1492-SP3	50	1492-SP3	50	—	—						
Test Plug	—	—	1492-TP28	10	1492-TP28	10						
Stackable Test Plug (with Legs)	—	—	1492-TP6EWL	10	—	—						
Stackable Test Plug (without Legs)	—	—	1492-TP6E	10	—	—						
Test Plug Adapter	1492-TA285	10	1492-TA40	10	1492-TA40	10						
Electrical Warning Plate (1-pole)	1492-EWP5	10	1492-EWP6	10	1492-EWP7	10						
Electrical Warning Plate (4-pole)	1492-EWP5-4	10	1492-EWP6-4	10	1492-EWP7-4	10						
Marking Systems:												
Snap-in Marker Cards	1492-MS5X12 (80/card)	5	1492-MS6X12 (80/card)	5	1492-MS6X12 (80/card)	5						

* May only be used as a marking surface. Cannot be installed over a center jumper.

Screw Connection Terminal Blocks

Specialty Feed-Through Blocks

	1492-W4TW			1492-WR3			1492-J4M	
Dimensions are not intended to be used for manufacturing purposes. Note: Height dimension is measured from top of rail to top of terminal block.								
	2.05" (52.1 mm)			1.78" (45.3 mm)			2.36" (60 mm)	
Specifications	Feed-through terminal block with 3 connection points, 2 on one side			Single-circuit terminal block with terminals on common side.			Motor connection terminal block cluster with 3 feeds and ground	
Certifications		CSA	IEC		CSA	IEC	Certifications on individual blocks (1492-J4, JG4)	
Voltage Rating	600V AC/DC	600V AC/DC	800V AC/DC	300V AC/DC	300V AC/DC	500V AC/DC		
Maximum Current	30 A	20 A	32 A	15 A	15 A	15 A		
Wire Range (Rated Cross Section)	#18...10 AWG	#22...12 AWG	0.5...4 mm ²	#22...14 AWG	#22...14 AWG	0.5...2.5 mm ²		
Wire Strip Length	0.35 in. (9 mm)			0.39 in. (10 mm)				
Recommended Tightening Torque	5.0...5.6 lb•in (0.6 N•m)			5.0...5.6 lb•in (0.6 N•m)			9.0 lb•in (1.0 N•m)	
Density	50 pcs/ft (166 pcs/m)			61 pcs/ft (200 pcs/m)			12 pcs/ft (40 pcs/m)	
Housing Temperature Range	-40...+195 °F (-40...+90 °C)			-40...+195 °F (-40...+90 °C)			-58...+248 °F (-50...+120 °C)	
Short-Circuit Current Rating	See page 12-42							
Terminal Blocks	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Color:	Grey	1492-W4TW	50	1492-WR3	50	—	—	—
	Grey/Green/Yellow	—	—	—	—	1492-J4M	20	—
	Red	1492-W4TW-RE	50	—	—	—	—	—
	Blue	1492-W4TW-B	50	—	—	—	—	—
	Black	1492-W4TW-BL	50	—	—	—	—	—
	Green	1492-W4TW-G	50	—	—	—	—	—
	Yellow	1492-W4TW-Y	50	—	—	—	—	—
	Orange	1492-W4TW-OR	50	—	—	—	—	—
	Brown	1492-W4TW-BR	50	—	—	—	—	—
	White	1492-W4TW-W	50	—	—	—	—	—
Accessories	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.	Cat. No.	Pkg Qty.
Mounting Rails:								
1 m Symmetrical DIN (Steel)	199-DR1	10	199-DR1	10	199-DR1	10	199-DR1	10
1 m Symmetrical DIN (Aluminum)	1492-DR5	10	1492-DR5	10	1492-DR5	10	1492-DR5	10
1 m Hi-Rise Sym. DIN (Aluminum)	1492-DR6	2	1492-DR6	2	1492-DR6	2	1492-DR6	2
1 m Angled Hi-Rise Sym. DIN (Steel)	1492-DR7	2	1492-DR7	2	1492-DR7	2	1492-DR7	2
End Barriers	Grey	1492-EB3TW	50	1492-EBR3	50	Not Required	—	—
End Anchors and Retainers:								
Screwless End Retainer	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20	1492-ERL35	20
DIN Rail — Normal Duty	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100	1492-EAJ35	100
DIN Rail — Heavy Duty	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50	1492-EAHJ35	50
Jumpers:								
Side Jumper — 10-pole insulated	1492-SJ6-10*	10	1492-SJ5-10	10	—	—	—	—
Screw Center Jumper — 50-pole	1492-CJ6-50	5	1492-CJD5-50	5	—	—	—	—
Screw Center Jumper — 10-pole	1492-CJ6-10	10	1492-CJD5-10	10	1492-CJJ6-10	20	1492-CJJ6-10	20
Screw Center Jumper — 5-pole	1492-CJ6-5	10	1492-CJD5-5	10	—	—	—	—
Screw Center Jumper — 4-pole	1492-CJ6-4	10	1492-CJD5-4	10	1492-CJJ6-4	50	1492-CJJ6-4	50
Screw Center Jumper — 3-pole	1492-CJ6-3	10	1492-CJD5-3	10	1492-CJJ6-3	50	1492-CJJ6-3	50
Screw Center Jumper — 2-pole	1492-CJ6-2	10	1492-CJD5-2	10	1492-CJJ6-2	50	1492-CJJ6-2	50
Center Jumper Cover — White†	1492-CJCW6	20	1492-CJCW5	20	—	—	—	—
Center Jumper Link	1492-CJL6	10	1492-CJL5	10	—	—	—	—
Screw Type Jumper Notching Tool	—	—	—	—	1492-T1	1	—	—
Other Accessories:								
Partition Plate	1492-PP10	50	1492-EBR3	50	1492-EBJ16	20	—	—
End Cover*	1492-EC3TW	10	—	—	—	—	—	—
Test Plug Socket	—	—	—	—	1492-TPS23L	50	—	—
Test Plug	1492-TP28	10	—	—	1492-TP23	20	—	—
Test Adapter	1492-TA40	10	1492-TA285	10	1492-TPJ6	25	—	—
Electrical Warning Plate	—	—	—	—	1492-EWPJ5	50	—	—
Marking Systems:								
Snap-in marker cards	1492-MS6X9 (80/card)	5	1492-MS5X9 (80/card)	5	1492-M6X12 (120/card)	5	—	—

* Use side jumpers on the single conductor side only.

* Provides IP2X Finger Safety when a W4 is mounted on open side of Cat. No. 1492-W4TW.

† May only be used as a marking surface. Cannot be installed over a center jumper.



IEC Terminal Block Accessories

Jumpers

Screw Type Center Jumpers





For Use With	Pkg Qty.	Cat. No.
1492-J3, JD3..., JDG3..., J2Q, J3TW, J3F, JD3F	50	1492-CJJ5-2
	50	1492-CJJ5-3
	50	1492-CJJ5-4
	20	1492-CJJ5-10
1492-J4, J4M	50	1492-CJJ6-2
	50	1492-CJJ6-3
	50	1492-CJJ6-4
	20	1492-CJJ6-10
1492-J6	50	1492-CJJ8-2
	50	1492-CJJ8-3
	50	1492-CJJ8-4
	20	1492-CJJ8-10
1492-J10	50	1492-CJJ10-2
	50	1492-CJJ10-3
	50	1492-CJJ10-4
	20	1492-CJJ10-10
1492-J16	20	1492-CJJ12-2
	20	1492-CJJ12-3
	20	1492-CJJ12-4
	10	1492-CJJ12-10
1492-J35	20	1492-CJJ16-2
	20	1492-CJJ16-3
	20	1492-CJJ16-4
	10	1492-CJJ16-10
1492-J50	10	1492-CJJ18-2
	10	1492-CJJ18-3
	10	1492-CJJ18-4
1492-J70	5	1492-CJJ20-2
	5	1492-CJJ20-3
	5	1492-CJJ20-4
1492-WM3	10	1492-CJM5-2
	10	1492-CJM5-3
	10	1492-CJM5-4
	10	1492-CJM5-5
	10	1492-CJM5-10
1492-W3, WM3, WR3, WTF3..., WTS3...	10	1492-CJL5 (Link)
1492-WR3	5	1492-CJD5-50
	10	1492-CJD5-2
	10	1492-CJD5-3
	10	1492-CJD5-4
	10	1492-CJD5-5
	10	1492-CJD5-10

For Use With	Pkg Qty.	Cat. No.
1492-WM4	5	1492-CJD6-50
	10	1492-CJD6-2
	10	1492-CJD6-3
	10	1492-CJD6-4
	10	1492-CJD6-5
	10	1492-CJD6-10
1492-WM4, W4TW	10	1492-CJLD6 (Link)
1492-W3	10	1492-CJ5-2
	10	1492-CJ5-3
	10	1492-CJ5-10
	20	1492-CJCW5 (CJ Cover)*
1492-WTF3..., WTS3...	5	1492-CJT5-50
	10	1492-CJT5-2
	10	1492-CJT5-3
	10	1492-CJT5-4
	10	1492-CJT5-5
1492-W4, W4TW	5	1492-CJ6-50
	10	1492-CJ6-2
	10	1492-CJ6-3
	10	1492-CJ6-4
	10	1492-CJ6-5
	10	1492-CJ6-10
1492-W4	10	1492-CJL6 (Link)
1492-W4, W6, W10	20	1492-CJCW6 (CJ Cover)
1492-W6	5	1492-CJ7-40
	10	1492-CJ7-2
	10	1492-CJ7-3
	10	1492-CJ7-4
	10	1492-CJ7-5
1492-W6	10	1492-CJ7-10
1492-W6	10	1492-CJL7 (Link)
1492-W10	5	1492-CJ8-40
	10	1492-CJ8-2
	10	1492-CJ8-3
	10	1492-CJ8-4
1492-W10	10	1492-CJ8-5
	10	1492-CJ8-10
	10	1492-CJL8 (Link)
1492-W16S	10	1492-CJS11-2
	10	1492-CJS11-3
	10	1492-CJS11-4
	10	1492-CJS11-5
	10	1492-CJS11-10

Note: Notching out one or more jumper poles, with the notched jumpers going across different potentials, will require de-rating to 400V.

* May only be used as a marking surface. May not be installed over center jumper.



		
Bulletin	1492-J, -W	1492-L
Type	Screw Type Terminal Blocks	Spring-Clamp Terminal Blocks
Technology	Screw terminations are a time-proven method of wire connection. Their greatest advantage is the ability to land multiple wires to a single terminal, potentially saving panel space. Screw type blocks can often accept up to five solid or stranded wires per terminal. They also typically provide the best visual indication of the wire connection.	Compared to screw type terminations, spring clamp terminations can be a significantly faster method of connection and can often reduce wire connection time by 30...50%. Because the wire is under constant tension from the spring clamp, spring type terminations also produce very favorable results in high vibration applications.
Certifications	UR, CSA	UR, CSA
Standards Compliance	IEC, CE	IEC, CE
Product Types	<ul style="list-style-type: none"> • Mini blocks • Feed-through blocks • Multi-conductor blocks • Plug-in style blocks • Grounding blocks • Fuse blocks • Two level terminal blocks • Three-Level Sensor blocks • Electrical Component blocks • Isolation blocks 	<ul style="list-style-type: none"> • Mini blocks • Fuse blocks • Feed-through blocks • Grounding blocks • Multi-circuit blocks • Plug-in style blocks • Isolation blocks • Sensor blocks • Electrical component blocks
Product Selection	Page 12-6	Page 12-47

Certifications

Allen-Bradley terminal blocks generally have been designed to meet the requirements of one or more regulatory bodies. Most products have also been tested per additional standards. The following is a listing of some of the regulatory bodies and standards which apply to Allen-Bradley terminal block products. See the particular product description for information on specific certifications and ratings.



(Underwriters Laboratories) — Devices in this catalog with one of these ratings have been tested by Underwriters Laboratories and meet the requirements of one or more of the following United States Standards:

- UL 467 — Grounding and Bonding Equipment
- UL 486E — Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
- UL 1059 — Standard for Terminal Blocks

Reference UL files E34648, E40735, E160646



(Underwriters Laboratories) — Devices in this catalog with this rating have been tested by Underwriters Laboratories and meet the requirements of the following Canadian Standard:

- CSA 22.2 No. 158 — Terminal Blocks

Reference UL file E40735



(Canadian Standards Association) — Devices in this catalog with this rating have been tested by the Canadian Standards Association and meet the requirements of the following Canadian Standard:

- CSA 22.2 No. 158 — Terminal Blocks

Reference CSA files LR67896



Terminal blocks listed in this catalog meet the requirements of the Low Voltage Directive put forth by the European Union. Devices have been tested and comply with one or more of the following European Norms:

- EN 60947-1 — Low Voltage Switchgear and Controlgear: General Rules
- EN 60947-7-1 — Low Voltage Switchgear and Controlgear: Terminal Blocks for Copper Conductors
- EN 60947-7-2 — Low Voltage Switchgear and Controlgear: Protective Conductor Terminal Blocks for Copper Conductors
- EN 60947-7-3 — Low Voltage Switchgear and Controlgear: Safety Requirements for Fuse Terminal Blocks



ATEX — Devices listed in this catalog with “ATEX” ratings meet the following European Norms per DEMKO or KEMA, Approval Certification Bodies for the European Union:

- EN 60079-7 — Electrical Apparatus for Potentially Explosive Atmospheres — General Requirements
- EN 60079-0 — Electrical Apparatus for Potentially Explosive Atmospheres — Increased Safety “e”

Contact your local Rockwell Automation sales office or Allen-Bradley distributor for a copy of the certificate.