

DS100-AX



Color: Gray

UPC Code: 07847712721

Country of Origin: Please Contact Customer Service

Brand Features

PowerSwitch SDS devices meet NEC Article 430 for separate disconnect in-sight of motor loads and OSHA Title 29 CFR 1910 and 1926 for lockout, tag out protection. The complete PowerSwitch SDS package is non-metallic, watertight and is engineered to enhance safety and performance for critical power control installations.

Item Description

100 Amp Non-Fused Safety Disconnect Switch, 3 Pole, 600 Volt, 25HP-120/208V 30HP -240V 50HP-480V-600V Rated, - IP67, Watertight, Hub Sold Separately (See Leviton Cat Number HUB-xxx)

Technical Information

Product Features

IP Rating: IP67, Watertight

Type: Non-Fused

Amperage: 100 Amp

Voltage: 600 Volt

HP Rating: 25HP-120/208V 30HP-240V 50HP-480V-600V

Pole: 3

Auxiliary Contact: Factory Installed; N.O. 10A; Early Break-Late Make

Fuse Type: NA

Body Material: Valox 357


Handle Material: Valox 357

External Hardware: Stainless Steel

Color: Gray

Standards and Certifications: UL/CSA

Warranty: 2-Year Limited

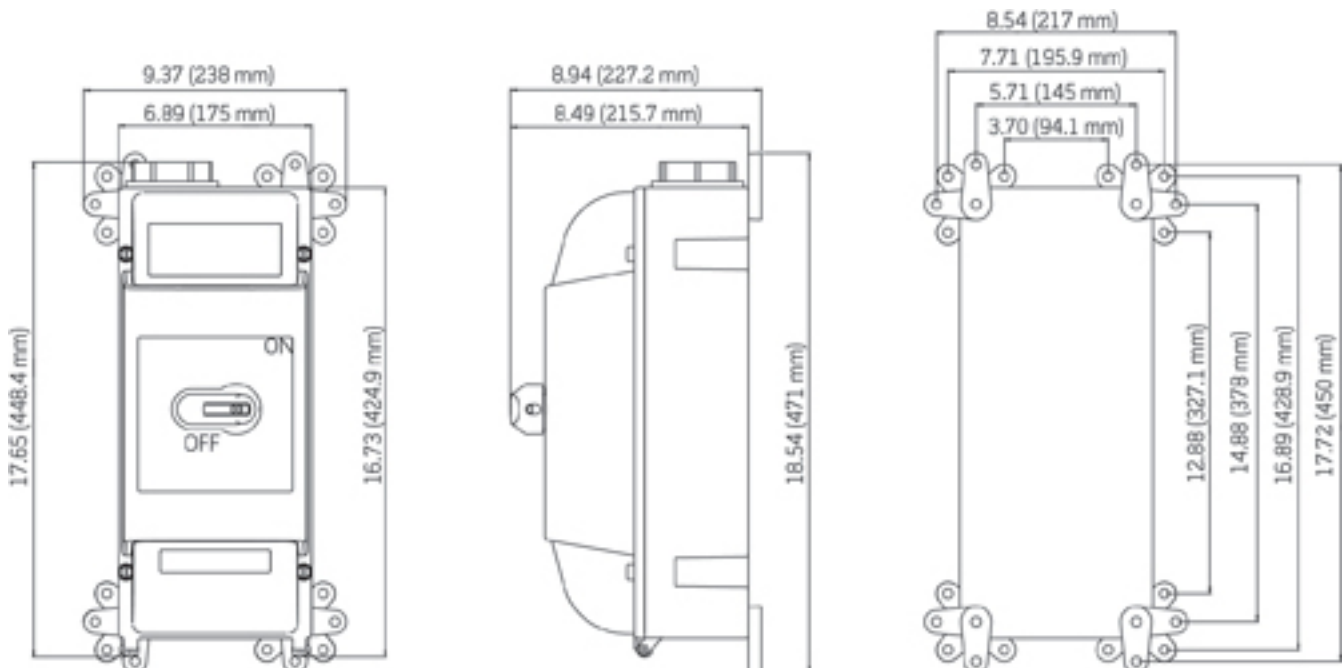

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747
Telephone: 1-800-323-8920 · FAX: 1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005

Leviton Manufacturing of Canada, Ltd.
165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: 1-800-469-7890 ·
FAX: 1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.
Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com
© 2012-2013 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton has a global presence.
If you would like to know where your local Leviton office is located please go to: www.leviton.com/international/contacts/

