

**Expanded Line of Time-Saving Straps
Now Supports More Applications!**

Kindorf[®]

**Angler™ Pipe and
Conduit Clamp**



Easy to Install




One-piece design snaps apart.



Clamp fits to the edge of conduit.



Hex head screw fits through keyhole.

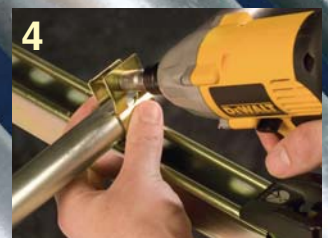

Tighten with manual or power tool.



Kindorf®

Angler™ Pipe and Conduit Clamp

Expanded Line for More Applications!

Now Angler™ Pipe and Conduit Clamps are available in Universal and Rigid versions, Galvkrom® and ElectroGalv finishes, and ½" to 4" sizes, to meet a wider variety of applications!

For EMT, IMC, Rigid, and Standard Pipe.



Universal Series

Cat. Number	Size	Strap Thickness	Design Load (lbs.)	Install Torque (in. lbs.)	Std. Pkg. Qty.
Galvkrom® Finish					
C 109 1/2	½"	14 ga.	400	40	100
C 109 3/4	¾"	14 ga.	500	40	100
C 109 1	1"	14 ga.	500	40	100
C 109 1 1/4	1¼"	14 ga.	500	40	100
C 109 1 1/2	1½"	12 ga.	800	60	50
C 109 2	2"	12 ga.	800	60	50
C 109 2 1/2	2½"	12 ga.	800	60	50
C 109 3	3"	12 ga.	800	60	50
C 109 3 1/2	3½"	11 ga.	1200	60	25
C 109 4	4"	11 ga.	1200	60	25
ElectroGalv® Finish					
C 109 1/2 EG	½"	14 ga.	400	40	100
C 109 3/4 EG	¾"	14 ga.	500	40	100
C 109 1 EG	1"	14 ga.	500	40	100
C 109 1 1/4 EG	1¼"	14 ga.	500	40	100
C 109 1 1/2 EG	1½"	12 ga.	800	60	50
C 109 2 EG	2"	12 ga.	800	60	50
C 109 2 1/2 EG	2½"	12 ga.	800	60	50
C 109 3 EG	3"	12 ga.	800	60	50
C 109 3 1/2 EG	3½"	11 ga.	1200	60	25
C 109 4 EG	4"	11 ga.	1200	60	25

For Rigid Conduit and Standard Pipe.

Rigid Series

Cat. Number	Size	Strap Thickness	Design Load (lbs.)	Install Torque (in. lbs.)	Std. Pkg. Qty.
Galvkrom® Finish					
C 109R 1/2	½"	14 ga.	600	40	100
C 109R 3/4	¾"	14 ga.	600	40	100
C 109R 1	1"	14 ga.	600	40	100
C 109R 1 1/4	1¼"	14 ga.	600	40	100
C 109R 1 1/2	1½"	12 ga.	800	60	50
C 109R 2	2"	12 ga.	800	60	50
C 109R 2 1/2	2½"	12 ga.	800	60	50
C 109R 3	3"	12 ga.	800	60	50
C 109R 3 1/2	3½"	11 ga.	1200	60	25
C 109R 4	4"	11 ga.	1200	60	25
ElectroGalv® Finish					
C 109R 1/2 EG	½"	14 ga.	600	40	100
C 109R 3/4 EG	¾"	14 ga.	600	40	100
C 109R 1 EG	1"	14 ga.	600	40	100
C 109R 1 1/4 EG	1¼"	14 ga.	600	40	100
C 109R 1 1/2 EG	1½"	12 ga.	800	60	50
C 109R 2 EG	2"	12 ga.	800	60	50
C 109R 2 1/2 EG	2½"	12 ga.	800	60	50
C 109R 3 EG	3"	12 ga.	800	60	50
C 109R 3 1/2 EG	3½"	11 ga.	1200	60	25
C 109R 4 EG	4"	11 ga.	1200	60	25

Hex head size ¾" for ½" to 1¼" sizes, ½" for 1½" to 4" sizes.


Material: Stamped Steel.

Pipe sizes 2 ½" to 4" utilize the same clamps for the Rigid Series and the Universal Series.

- **Easy Bolt Access.** Angler™ makes it simple to reach bolts with a screwdriver or power tool, even when clamps are installed side by side.
- **Fast Installation.** Keyhole-shaped opening enables bolt to be fed through strap without first being unthreaded.
- **Convenient, One-Piece Design.** No disassembly. No spare parts to lose or drop. Easy to carry and store.
- **Superior Load Performance.** The highest load ratings of any break-apart strap in the industry. Integrated, rolled threading provides the load performance of a hex nut without the extra hardware.
- **Universal Series.** For EMT, IMC, rigid, and standard pipe. One versatile clamp fits snugly on a variety of conduit and pipe.
- **Rigid Series.** For rigid conduit and standard pipe. Specialized clamp offers a superior, custom fit and an outstanding load rating.
- **Galvkrom® Outperforms Other Finishes.** Gold color matches Kindorf® strut systems and outperforms other finishes for corrosion protection, abrasion resistance, and service life.
- **Also available in ElectroGalv Finish.** Versatile silver color matches other pre-galvanized or green painted strut systems.



T&B's unique angled tab design

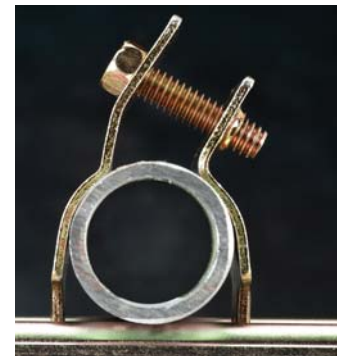

Thomas & Betts

Please ask your Thomas & Betts sales representative for a complete catalog of quality Thomas & Betts electrical products or visit us at www.tnb.com. For customer service, call 1-800-816-7809. For technical questions, call 1-888-862-3289.

Thomas & Betts Corporation
Electrical Division
8155 T&B Boulevard
Memphis, TN 38125
901-252-5000

Thomas & Betts Ltd.
700 Thomas Avenue
Iberville, Québec J2X 2M9
450-347-5318